MATANUSKA-SUSITNA BOROUGH INFORMATION MEMORANDUM IM No. 24-061

SUBJECT: A RESOLUTION OF THE MATANUSKA-SUSITNA BOROUGH ASSEMBLY SUPPORTING THE DEVELOPMENT OF COAL-FIRED POWER GENERATION AND RELATED INFRASTRUCTURE USING TECHNOLOGIES TO REDUCE EMISSIONS AND PROVIDE AFFORDABLE, RELIABLE, CLEAN ELECTRICITY.

AGENDA OF:March 5, 2024

Assembly Action: Amended and adopted with Assemblymembers Hale and Nowers opposed 03/05/24 - BJH

AGENDA ACTION REQUESTED: Present to the Assembly for consideration.

Route To	Signatures
Originator	2/23/2024 X NS for Assembly member Y... Signed by: Nicholas Spiropoulos
Borough Attorney	2/23/2024 X Nicholas Spiropoulos Signed by: Nicholas Spiropoulos
Borough Manager	2/23/2024 X Michael Brown Signed by: Michael Brown
Borough Clerk	2/26/2024 X Lonnie McKechnie Signed by: Lonnie McKechnie

ATTACHMENT(S): Resolution Serial No. 24-031 (4 pp)
UAF Proposal (15pp)
Hilcorp Presentation to AK Legislature (7pp)
Enstar Presentation to AK Legislature (20pp)
UAF CCS presentation and analysis (21pp)

SUMMARY STATEMENT: This resolution is sponsored by Assemblymember Yundt supporting the development of coal-fired power generation and related infrastructure using technologies to reduce emissions and provide affordable, reliable, clean electricity.

RECOMMENDATION OF ADMINISTRATION: Present to the Assembly for consideration.

CARBONSAFE PHASE II PROJECT READINESS
Alaska Railbelt Carbon Capture and Storage (ARCCS) Project

PREAMBLE

The Railbelt of Alaska is facing an imminent shortage of natural gas and electricity supply. The Railbelt contains 75% of Alaska's population and extends from Fairbanks to Anchorage and the Kenai Peninsula. A winter peaking load that is not interconnected to a larger grid, the Railbelt is described as "a unique electrical system in the US".[1] For more than 60 years, the Railbelt has depended on natural gas from the Cook Inlet Basin as its primary energy supply for both electricity generation and for direct use. Hilcorp Energy Company (Hilcorp), which supplies ~85% of the natural gas to Southcentral Alaska (Southcentral), recently gave notice that depleting Cook Inlet gas reserves prevent renewal of utility supply agreements beginning in 2025.[2] The need to find other energy sources is urgent.

A dominant electricity producer in Southcentral, the Chugach Electric Association, Inc. (CEA), relies on gas for 80% of its electricity needs. CEA states in its review of gas resources, "Absent sufficient production from the Cook Inlet, and with North Slope [gas] pipeline projects years away, the study concluded it may be necessary for Southcentral utilities to import either liquid or compressed natural gas to fill the gap."[3] Importing liquefied natural gas (LNG) from the Asia-Pacific region creates significant fuel price risk and is expected to substantially increase Southcentral electricity prices.

Alaska's energy demand per capita is the second-highest in the nation. It is the only U.S. state with land north of the Arctic Circle where winters are frequently severe. Concurrent with high energy demand is the high cost of energy: Alaska industrial electricity prices were more than twice the U.S. average as of March 2023, 19.07 vs. 7.91 cents/kWh, respectively.[4] Electricity prices in rural areas can be three to five times higher than urban areas.

To support rural communities, the state has created a financial assistance program to help cover the cost of electricity. This power cost equalization (PCE) program equalizes rural power costs to near the average cost of power in the urban areas including the Railbelt plus Juneau. Residential and community facility buildings in 195 communities are eligible for the reduced electricity rates through the PCE program, and the PCE program furthers rural community development through rural utility assistance and training programs. Thus, through the PCE program, investments that lower electricity costs in the Railbelt will lower electricity costs across the state.[5]

The National Renewable Energy Lab (NREL) completed a Railbelt electrical grid study in 2022, assessing five alternative scenarios for renewable power including a mix of hydro, geothermal, tidal, wind, and solar.[6] Even the highest renewable energy scenarios require fossil thermal-energy backup for reliable power generation and retain at least 75% of the current fossil thermal energy generation capacity.

---

[1] Waterpower, www.waterpowermagazine.com/features/featurehydropower-and-the-alaska-railbelt-9761276 (accessed May 2023).
[2] DeMarban, A., 2022, Hilcorp warns Alaska utilities about uncertain Cook Inlet natural gas supplies: Anchorage Daily News, May 17, 2022.
[3] Chugach Electric Association, 2020, Electric utility tariff: www.chugachelectric.com/system/files/regulatory_affairs/North_District_Operating_Tariff_-_Electric.pdf (accessed January 2023).
[4]U.S. Energy Information Administration, www.eia.gov/state/analysis.php?sid=AK (accessed June 2023).
[5]Alaska Energy Authority, www.akenergyauthority.org/What-We-Do/Power-Cost-Equalization (accessed June 2023).
[6] Denholm, P., Schwarz, M., DeGeorge, E., Stout, S., and Wiltse, N., 2022. renewable portfolio standard assessment for Alaska's Railbelt: Golden, CO, National Renewable Energy Laboratory. NREL/TP-5700-81698. www.nrel.gov/docs/fy22osti/81698.pdf.

Providing carbon capture, utilization, and storage (CCUS) for required fossil thermal power generation could be viewed as a priority over alternative options in the Railbelt and Southcentral.

A statewide screening of CCUS for Alaska concluded the Cook Inlet Basin is the most prospective region for carbon storage adjacent to population centers and existing electrical grid. The study, documented in *The Alaska CCUS Workgroup and a Roadmap to Commercial Deployment,*[7] found high storage potential in the Cook Inlet and in the remote, isolated North Slope. Extensive subsurface datasets are available but lack the integrated assessment required to define carbon storage volumes with high confidence.

Coal-fired power generation with CCUS presents a compelling alternative to imported LNG by providing affordable, reliable, clean electricity to the Railbelt grid at substantially lower than current costs—which through PCE lowers energy costs across the state for both urban and rural customers. Abundant local coal reserves provide low-cost fuel for power generation ($4/MMBtu) at one-half to one-quarter the cost of natural gas (~$10/MMBtu) or diesel and naphtha ($20/MMBtu) per the Alaska Energy Authority forecast. Power generation can commence between 6 and 8 years from the start of front-end engineering design (FEED). CCUS is viewed as critically necessary to address climate concerns and for public acceptance of a new dual-fuel (coal and biomass) power generation facility. With CCUS, a coal-fired power generation plant emits one-quarter to one-half the greenhouse gas emissions of a natural gas-fired plant without CCUS. CCUS is not yet commercially attractive for natural gas-fired power plants in Alaska.

Power generation with CCUS supports the objectives of the Governor and of Alaska's Office of Energy Innovation in accessing a secure and diverse energy mix for safe, reliable, and affordable energy for Alaskans and Alaska's desire for leadership in "both carbon capture, utilization, and storage and building the critical minerals of this state and nation."[8] The Governor's Administrative Order No. 340 places "policies that enable Alaska to capitalize on its vast energy potential in order to lower the cost of energy and enhance the stability of energy delivered to Alaskans" as the first listed purpose of the Office of Energy Innovation.

CCUS in Alaska is well positioned for success, and completion of the Alaska Railbelt Carbon Capture and Storage (ARCCS) project will result in a notably reduced project risk profile by defining the carbon storage capacity in northern Cook Inlet. Favorable storage complex and project attributes for the Cook Inlet Basin include 1) the most mature oil and gas basin in Alaska, with significant CO_2 storage potential in depleted oil and gas reservoirs and saline aquifers and geologic data for these fields are abundant and readily available; 2) the existing oil and gas infrastructure that could support the transport and injection of CO_2; 3) the surrounding communities have longstanding and generally positive relationships with the oil and gas industry, so investment in CCUS is expected to be received favorably. Initial project economic screening incorporating capture; transport; Class VI wells; permitting; and monitoring, verification, and accounting (MVA) suggest commercial-scale CCUS is economically attractive.

These factors, combined with the University of Alaska Fairbanks (UAF), Advanced Resources International (ARI), and the University of North Dakota Energy & Environmental Research Center (EERC) (the Project Partners) extensive experience with CCUS through the Plains CO_2 Reduction (PCOR) Partnership Initiative and other CarbonSAFE Initiative efforts will ensure a successful Phase II effort. Investing in this ARCCS assessment will enable reliable, affordable, clean power generation for the Railbelt, addresses the imminent natural gas supply energy shortfall, and, by lowering electricity costs

[7]SPE-213051, Alaska CCUS Workgroup and a Roadmap to Commercial Deployment, May 2023, https://doi.org/10.2118/213051-MS.

[8] Alaska Department of Natural Resources, 2022, Hilcorp plan of lease operations, Beluga River K pad expansion application: https://aws.state.ak.us/OnlinePublicNotices/Notices/View.aspx?id=207439.

in urban areas, benefit rural communities across the state by lowering their electricity costs through the PCE program.

1.0 COOK INLET CARBON STORAGE SCENARIO ANALYSIS

1.1 Probability of Storing 50 Million Metric Tons of CO_2 in a 30-Year Period

The ARCCS project in the Cook Inlet region of Southcentral Alaska evaluates storing CO_2 captured from a new 400-megawatt gross (~300-megawatt net with carbon capture plant load) dual-fuel capable power generation plant and two natural gas-processing plants (Figure 1). This feasibility study will evaluate the aggregation of CO_2 captured from these sources for injection into a geologic storage complex on the northern shore of Cook Inlet Basin. This ambitious effort will support the pursuit of a low-carbon, economically affordable, reliable energy supply option to address the pending shortage of natural gas and electricity supply in the Railbelt of Alaska, which contains 75% of Alaska's population and extends from Fairbanks to Anchorage and the Kenai Peninsula.

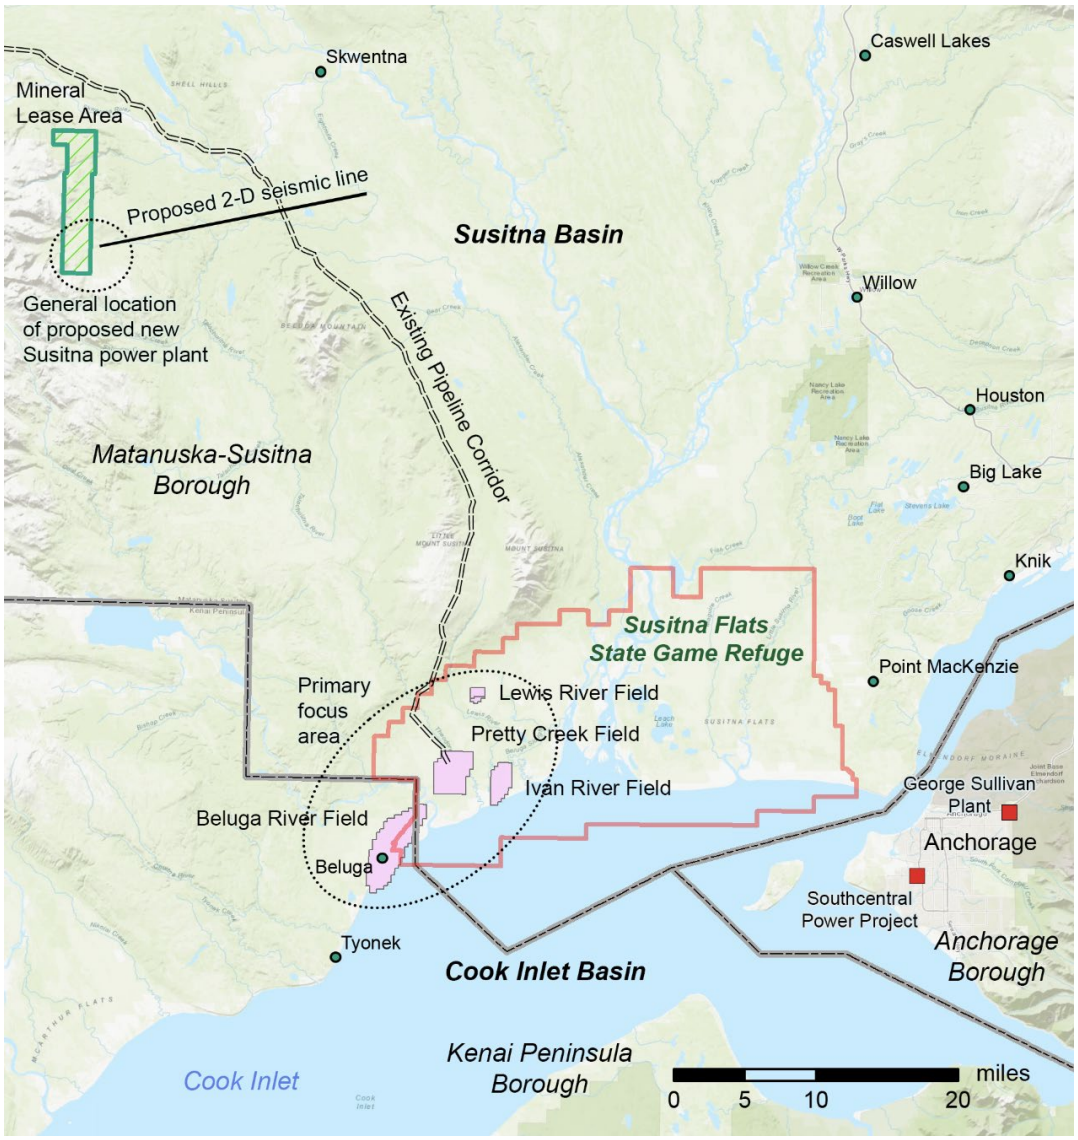

Figure 1. Map of proposed CO_2 storage location and proximity to CO_2 sources. Existing sources are shown as red squares. The location of the proposed Susitna power plant is indicated in the northwest map area.

Capture and storage from the proposed power plant alone over a 30-year period will exceed 60 million tonnes of CO_2. As discussed in Section 2.3, Prospective Storage Resources, the proposed primary CO_2 storage horizon is the production zone of the Beluga River Field, a nearly depleted unitized gas field. Based on gas volumes produced to date and using CO_2 density at reservoir conditions, the prospective CO_2 storage resource for the Beluga River Field is estimated at 157 Mt. This resource estimate is nearly three times what is needed to meet the CarbonSAFE requirements and sufficient for approximately 60 years' worth of storage resource for CO_2 captured from a 400-MW gross power plant (300-MW-net delivered power after CCUS) at 2.6 million tonnes per year. The inclusion of other depleted regional fields could push the total to nearly 200 Mt of storage.

1.2 Map Showing Sources, Pipelines, Storage Site(s), Footprint of CO_2 and Pressure Plume, Land Use

See Figure 1 for the distribution of candidate sources (Table 1) and notional pipeline route(s). The extent of the CO_2 footprint within each of the depleted gas fields will be constrained by the structural closure of each field. The extent of the critical pressure plume (as defined by the U.S. Environmental Protection Agency (EPA) may reach beyond the edge of the CO_2 plume. More refined dimensions of both plumes will be determined through the data collection, geologic modeling, and subsequent dynamic simulation proposed for this project.

Table 1. Potential CO_2 Sources for the ARCCS Project

Name	Annual CO_2 Emission, metric tonnes per annum
George Sullivan Plant 2, Chugach Electric Association	316,000
Southcentral Power Project, Chugach Electric Association	426,000
Proposed New 300-MW Net Power Plant, Flatlands Energy	2,600,000

1.3 Anticipated Business Contractual Requirements to Address Technical and Financial Project Risks

Several business contracts will need to be negotiated in the pursuit of addressing technical and financial risks associated with a large-scale integrated carbon storage project in the Cook Inlet region of southern Alaska. A number of these potential contracts are enumerated in Table 2, in no particular order.

Table 2. Future Contract Requirements

Contract Description	Purpose
Contract with Drilling and Logging Company to Drill, Core, and Log Stratigraphic Test Well.	Providing subsurface geologic properties of the target formation will allow for an accurate estimation of CO_2 plume size and injection rates.
Establish Pore Space Leasing Contract and Per-Acre Pricing	An early establishment of a fair and comprehensive pore space leasing agreement document will ensure that the process moves forward in a smooth and positive manner.
Secure a Land-Use Permit	A land-use permit from the borough or local land management agency is necessary for the ultimate installation of one or more Class VI wells.
Establish Purchasing or Leasing Agreement to Acquire Land for Ultimately Placing a Class VI Well	Depending on the final site selection for one or more Class VI injection wells, a purchasing or leasing agreement will be required to acquire the land needed for a surface facility and wellsite.
Apply for U.S. Department of Energy (DOE) Guarantee Loan Program and Negotiate Repayment Terms	A successful loan application will provide assurance that the project will proceed to completion.

1.4 Level of Commitment

We have received more than 15 letters of support or commitment regarding the ARCCS project. Each organization is committed fully within their individual scopes and spheres of influence to move CCS forward in a manner that is economically attractive and publicly acceptable.

Governor Dunleavy and his administration strongly support the proposed ARCCS project. As evidenced in the attached Letter of Support, he is committed to working with the legislature to appropriate up to $2.25 million for the ARCCS project. This commitment is the primary reason we have selected a project start date of July 1, concurrent with the beginning of Alaska's fiscal year. The ARCCS project compliments Governor Dunleavy's Carbon Management and Monetization Bill package. Senate Bill 49 and House Bill 50 specifically creates new authorities for State agencies to license, lease, and administer the State's pore space for geological storage; administer pipeline infrastructure for transportation of captured carbon to geological storage facilities and administer injection wells and carbon storage facilities; and protect correlative rights of all subsurface owners. The legislature will resume its consideration of these bills in January 2024.

The applicant team has assembled letters of commitment and other letters of support that included as separate attachments within the proposal package. The cost share letters are summarized here:

- ARI has committed to providing $420,491 to support the proposed project. This contribution speaks to the seriousness of ARI's intent to support the goal of the DOE CarbonSAFE initiative.
- The Alaska Division of Oil and Gas is the agency responsible for holding lease sales for Alaska. Their Resource Evaluation team has committed $137,131 in labor to assist with identifying which reservoirs are most suitable for long term sequestration of CO_2, interpreting log and seismic data, and reviewing work products.
- The Alaska Division of Geologic and Geophysical Surveys (DGGS) has an ongoing Cook Inlet program. An important aspect of the program is to understand how and when these strata were deformed to produce hydrocarbon trapping structures, conduits for fluid migration, and fracture porosity. These results are integrated with the subsurface geology in prospective regions of the basin using available seismic, core, and wireline log data, in an effort to maximize value for the ARCCS project. DGGS activities are calculated to cost $574,466, which is included in the cost share commitment provided by Governor Mike Dunleavy.
- Blueprint Alaska (BPA) is a female-owned, advocacy and strategic communications firm headquartered in Anchorage. They work with a range of Alaskan clients involved in oil and gas, mining, health care, business development, Alaska Native Corporations, and aviation. BPA will provide support to the continuing efforts of the Workgroup described in our Community, Labor and Stakeholder Engagement efforts by assisting with social media and outreach. They are committing $49,875 in cost share.
- Friends of West Susitna (FOWS) is a non-profit grassroots organization made up of long-time Alaskans whose mission is to advocate for the State of Alaska to provide year-round road access to state-owned lands west of the Susitna River. They will assist ARCCS by arranging for outreach to nearby villages and other stakeholders. FOWS is committing $40,000 in cost share.
- Flatlands Energy Corp. has been operating in the Susitna region since 2015. They have completed a multi-year exploration program and is now advancing feasibility of a duel fueled biomass and coal CCS power plant. They are providing cost share of $68,736.
- IRT has worked closely with UAF and DNR to facilitate the public Workgroup meetings for developing a CCS industry in Alaska. They also bring considerable technical expertise to the ARCCS project and have committed $98,764 of cost share.
- Mike Belowich of Belowich Coal Consulting (BCC) is a long-time geologist working in the Cook Inlet Basin. He has an impressive history of drilling core holes and correlating log results yielding new and better understandings of the Cook Inlet geology. BCC is providing cost share of $19,376.

- UAF, a Minority Serving Institution, is looking forward to building capacity within the State by closely working with EERC and ARI. UAF is committing $335,412 in cost share. In addition to utilizing its existing faculty, UAF will grow its expertise by hiring additional faculty, Postdocs, and support four graduate students.

1.5 Estimate of Anticipated Capital and Operating Costs

One of the variables cited as controlling the influence of cost for a CO_2 storage complex is how well-suited the geologic target is for CO_2 storage. The geologic setting represented in depleted gas fields provides evidence of conditions necessary to contain buoyant fluids for millions of years, thus moving the expected costs associated with the geologic storage of CO_2 to the lower range. Following DOE approval of this proposed initiative, UAF and its partners will collaborate on determining the capital and operational costs of the system as follows:

a) Capital cost for the CO_2 capture facilities – estimation of the cost for integrated CO_2 capture facilities at the proposed new electric generation station and associated operational costs of the capture facilities. The same type of information will be generated for the smaller existing CO_2 emission sources, as shown in Figure 1.

b) Capital and operational costs for the transportation of the captured CO_2 from the proposed power plant and other candidate CO_2 sources to the central injection location. A preapproved pipeline corridor in the area will be leveraged for the use of rights of way (ROWs) and to facilitate permitting and construction.

c) Capital and operational costs for the injection wells. The cost for the drilling of stratigraphic or monitoring wells will be included in the estimate for the injection wells.

d) The future costs associated with the monitoring, verification, and reporting (MVR) of the CO_2 plume, pipeline operations, facilities, etc., will be outlined and included as part of the cost of this project.

As a result of the reviews mentioned above associated with the Phase II efforts, a more accurate and precise estimate of the storage costs for future CarbonSAFE Program implementation phases and projects can be realized.

1.6 Anticipated Needs and Strategy to Secure Financing and/or Cost Share

Investment into a regional CCUS facility in the Cook Inlet area can capitalize on several financial leveraging opportunities. From a national perspective, the U.S. government, through its 45Q program, offers an $85/metric ton tax credit for CO_2 securely stored in geologic formations. DOE offers access to capital for large-capacity CO_2 transport projects under the carbon dioxide transportation infrastructure finance and innovation (CIFIA) program. Additional sources of funding to move a pioneering effort like this forward in Alaska could also come from the recently introduced Alaska Energy Independence Fund.

1.7 Strategy for Securing Pore Space Rights

Acquiring the legal right to access and use the pore space of a geologic formation for permanent CO_2 storage is required for commercial CCS projects.[9] The owner(s) of the overlying surface estate and the mineral estate are important considerations for CO_2 injection and storage. Conflicts or shared interests

[9] Peck, W.D., Regorrah, J.G., Doll, T.E., Nakles, D.V., Pekot, L.J., and Connors, K.C., 2021, Pore space—technical and legal considerations for CO_2 storage in North Dakota: Plains CO_2 Reduction (PCOR) Partnership Initiative White Paper for U.S. Department of Energy National Energy Technology Laboratory and North Dakota Industrial Commission, October.

between the oil and gas operator and the carbon storage pore space leaseholder may arise. Currently, in Alaska, pore space is considered a mineral and is therefore controlled by the mineral owner. The state is currently reviewing this aspect of pore space leasing through a recently introduced bill (see Section 1.8). There may be project upsides to working in conjunction with the hydrocarbon-producing field owner, e.g., rather than abandoning certain equipment upon cessation of production, some may be repurposed for the storage project.

1.8 Role of State Incentives/Policies Toward Economics and Public Acceptance

In January of 2023, Alaska Governor Mike Dunleavy introduced a CCUS bill (Senate Bill 49 and House Bill 50) that contains multiple sections, including use of public lands, pore space leasing, allowing CO_2 transportation by pipelines, and addresses ownership of carbon dioxide and ascription of liability. The bill empowers the Alaska Department of Natural Resources (ADNR) and the Alaska Oil and Gas Conservation Commission (AOGCC) to manage unitization, protection of other mineral interests, amalgamation of property rights, and preservation of existing rights. This CCUS bill proposes a competitive licensing and leasing program for carbon storage by allowing operators of CO_2 enhanced oil recovery (EOR) operations to transition straight into CO_2 storage operations. The bill also proposes a robust carbon storage permit process for the AOGCC to administer pore space leasing, manage competing subsurface uses, and ensures the protection of other reservoirs such as nearby hydrocarbon or geothermal production. The bill was generally well-received by the State Legislature and multiple hearings on the bill have gathered public input. It bodes favorably for passage next session (first quarter of 2024) that in 2023, the Legislature authorized the State to seek Class VI primacy from the EPA.

1.9 Potential Sources of Revenue

The current federal incentives, such as the 45Q tax credit, provide a financial incentive for Flatlands Energy to make these investments and provide returns to its shareholders that may not otherwise be available. This provides diversification to Flatlands Energy's portfolio of services that can benefit stakeholders long-term.

The availability of a steady supply of captured CO_2 will also be attractive to potential EOR or enhanced gas recovery (EGR) operators in the Cook Inlet area or beyond. Revenue gained from the potential sales of CO_2 to regional hydrocarbon production companies would be notable.

1.10 Long-Term Liability for Stored CO_2

In early 2023, House Bill 50 was introduced in the Alaskan legislature. This proposed legislation relates to the geologic storage of CO_2 and includes provisions for the long-term liability of the stored CO_2. Once a certificate of project completion is issued by the state, title to, and liability for, the CO_2 storage facility and the stored CO_2 transfers to ADNR. As of June 2023, the proposed legislation was moving through the approval process and will be taken up again by the Alaska State Legislature when the session continues in January 2024.

2.0 TECHNICAL SUBBASINAL EVALUATION

2.1 Storage Reservoir(s)

The primary storage target is the 7.5-mi long by 2.5-mi wide Beluga River gas field. The field produces from two formations: the overlying high-net-to-gross Pliocene-age Sterling Formation and the underlying low-net-to-gross Miocene-age Beluga Formation. These formations consist of thick sequences of nonmarine, fluvial-dominated, volcanic to arkosic sandstone, siltstone, mudstone, and coal. Gross reservoir thickness is up to 3400 feet and consists of dozens of stacked channel belt and crevasse splay sandstone beds separated by laterally continuous, relatively impermeable flood basin siltstone, mudstone,

and coal.[10] There are currently nine producing zones in the reservoir complex, with a net sand average porosity of 32% for the three in the Sterling Formation and 21% for the six in the Beluga Formation. These production zones will be the initial targets for CO_2 injection and storage. In the secondary gas field storage targets (Ivan River, Pretty Creek, and Lewis River Fields), the candidate storage intervals are in the Tyonek and Beluga Formations (Figures 2 and 3).

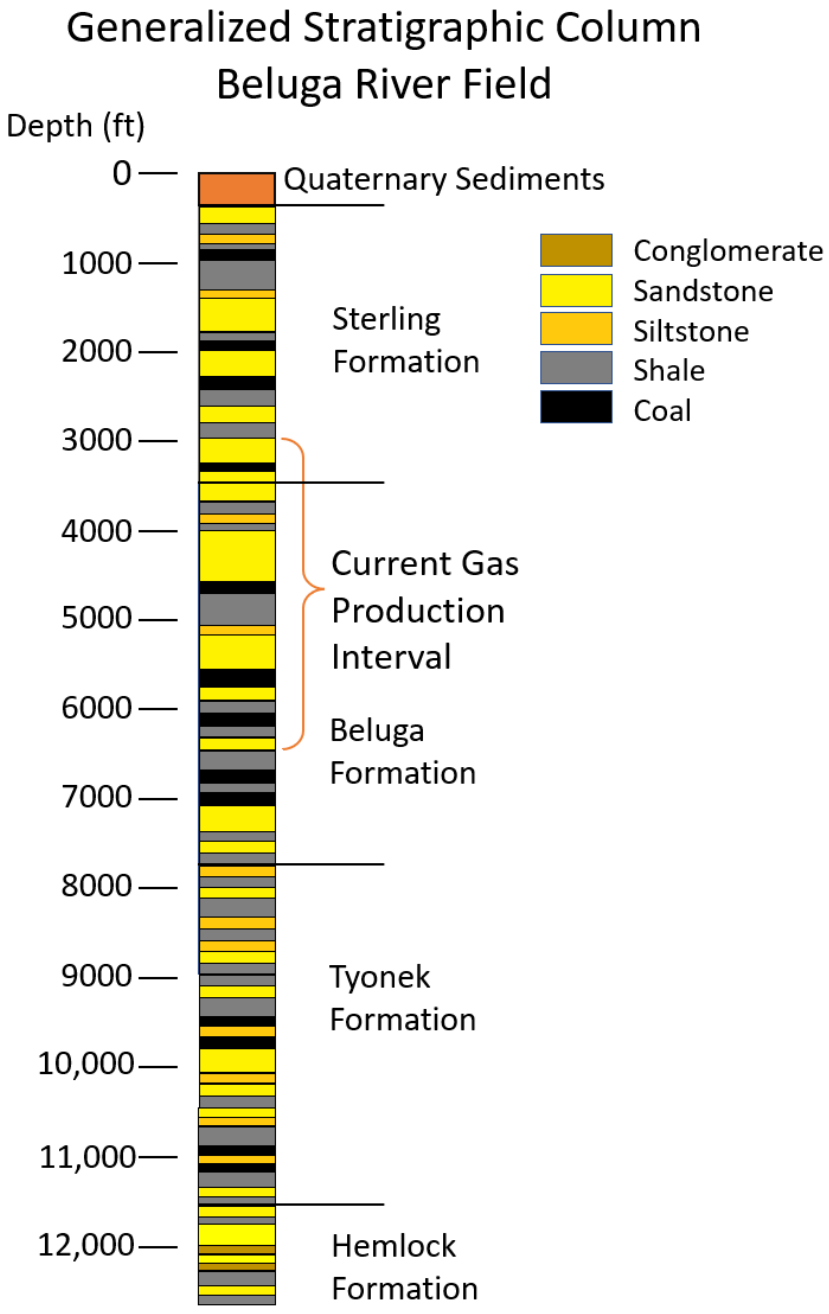

Figure 2. Generalized stratigraphic column of Beluga River Field.

[10] Levinson, R.A., 2013, Beluga River gas field, Cook Inlet, Alaska, *in* Stone, D.M., and Hite, D.M., ed., Oil and gas fields of the Cook Inlet Basin, Alaska: AAPG Memoir 104, p. 245–261.

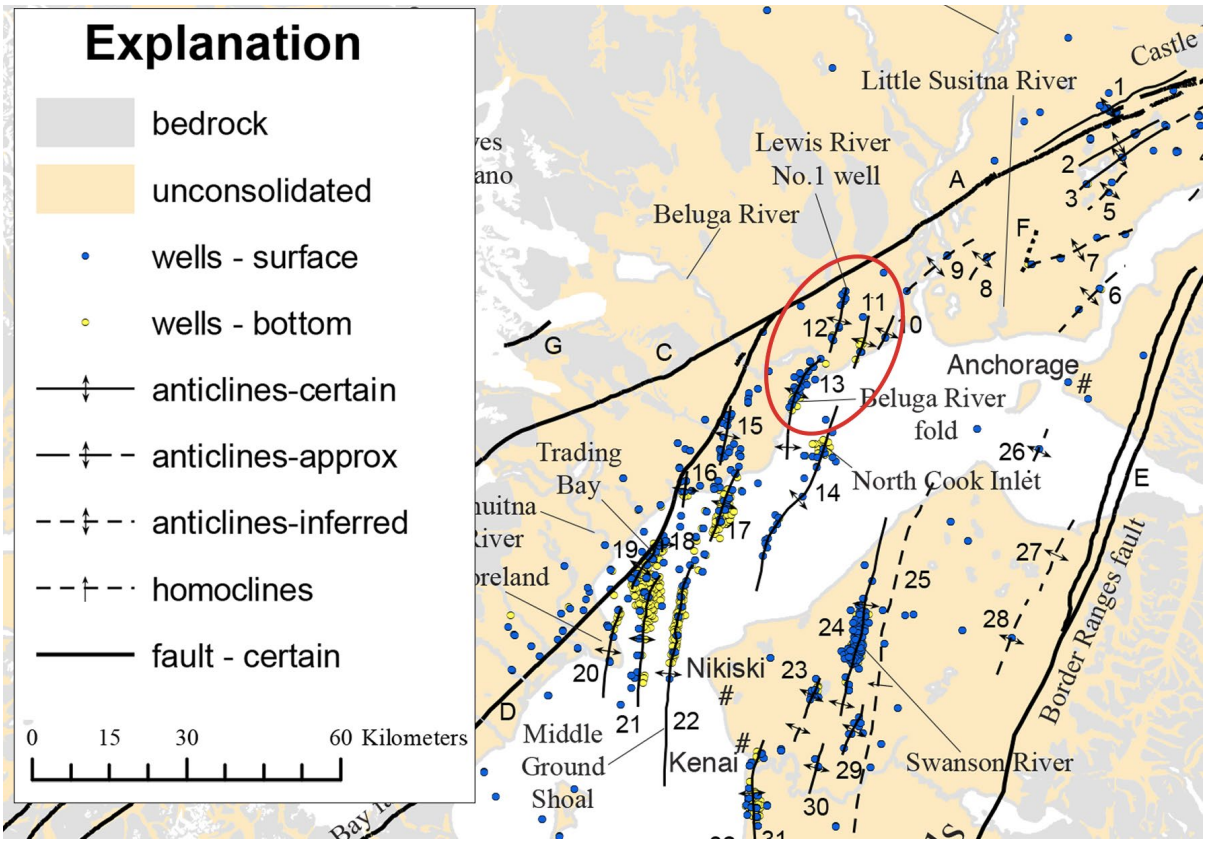

Figure 3. Anticlines and faults of the northern Cook Inlet. Anticlines 11, 12, and 13 correspond to the Ivan River, Lewis River/Pretty Creek, and Beluga fields, respectively. (Modified from Haeussler and Saltus, 2011.)[11]

2.2 Confining System

The stratigraphic confining intervals of the stacked channel belt deposits comprise laterally continuous flood basin siltstones, mudstones, and coals[12] within the Sterling and Beluga Formations. The overall structural trap in each of the prospective gas fields is a broad north-northeast-trending double plunging anticlinal structure with a steeply dipping reverse fault along the west side. In the Beluga River Unit, there is nearly 600 feet of closure on this structure (Figure 4).

2.3 Prospective Storage Resources

The proposed primary CO_2 storage horizon is the production zone of the Beluga River Field, a nearly depleted unitized gas field. The reservoir is located approximately 4000 feet deep and has a discovery pressure of approximately 2500 psi. Assuming a surface temperature of approximately 60°F with a geothermal gradient of 0.015°F per foot results in a reservoir temperature of approximately 120°F. Under these reservoir conditions, natural gas has a density of approximately 7.8 lb/ft^3 compared to a density of

[11] Haeussler, P.J., and Saltus, R.W., 2011, Location and extent of Tertiary structures in Cook Inlet Basin, Alaska, and mantle dynamics that focus deformation and subsidence, *in* Dumoulin, J.A., and Galloway, J.P., eds., Studies by the U.S. Geological Survey in Alaska 2008–2009: U.S. Geological Survey Professional Paper 1776–D, 26 p.
[12] Levinson, R.A., 2013, Beluga River gas field, Cook Inlet, Alaska, *in* Stone, D.M., and Hite, D.M., ed., Oil and gas fields of the Cook Inlet Basin, Alaska: AAPG Memoir 104, p. 245–261.

approximately 0.044 lb/ft^3 under standard conditions[13] and when integrated with production to date, results in a total reservoir volume available of approximately 7.3 Bcf.

Under the same reservoir conditions, CO_2 has a density of 46.8 lb/ft3 (749 kg/m^3)[14]. The same 7.3 Bcf of reservoir volume **could be occupied by approximately 157 Mt** of injected CO_2, three times what is needed to meet the CarbonSAFE requirements. At CO_2 capture rates associated with a 400-MW gross power plant (300-MW-net delivered power after CCS) of 2.6 million metric tons per year, this **provides approximately 60 years' worth of storage** resource. The inclusion of other depleted regional fields could push the total to nearly 200 Mt of storage.

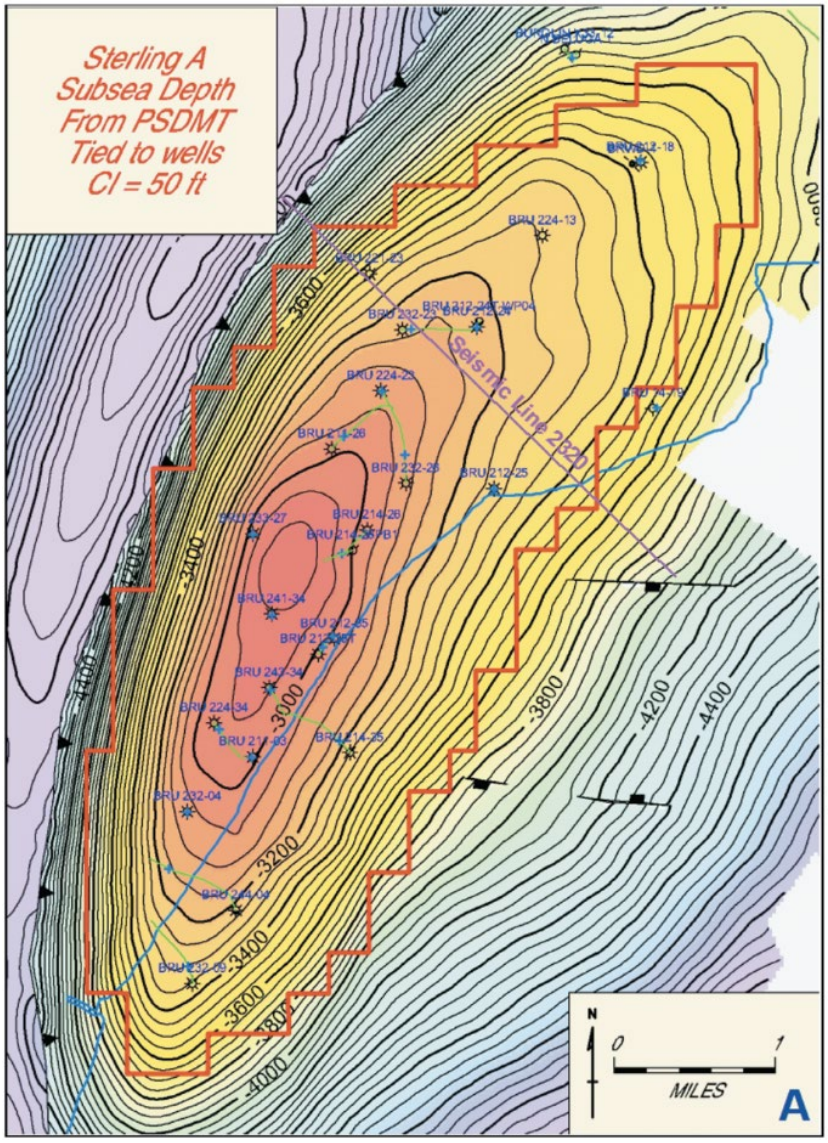

Figure 4. Geological structure map on the top of the Sterling A interval, which is the top of the productive interval of the Beluga River gas field.[12]

[13] Unitrove, 2022, Natural gas density calculator: www.unitrove.com/engineering/tools/gas/natural-gas-density (accessed September 2022).
[14] MegaWatSoft Inc., 2022, September 26. CO_2 tables calculator: Retrieved from www.carbon-dioxide-properties.com/co2tablesweb.aspx (accessed January 2023).

2.4 Summary

The petrophysical properties of the Sterling and Beluga Formations and the presence of effective confining intervals result in favorable conditions for the injection and secure permanent storage of CO_2. These primary characteristics demonstrate viability as a storage reservoir for CO_2 and are summarized in Table 3.

Table 3. Beluga Formation Properties[15]

Property	Value
Thickness	~4500 feet gross thickness
Net-to-Gross (NTG) Ratio	15%–40% NTG
Porosity	12%–28%
Permeability	0.1–100 milliDarcy

3.0 REGIONAL CONSIDERATIONS ANALYSIS/SITE-SELECTION PROCESS

3.1 Protected and Environmentally Sensitive Areas

3.1.1 Water Resources

Any CCUS project must take appropriate steps to ensure the protection of underground sources of drinking water (USDWs). A USDW is defined by the Safe Drinking Water Act (U.S. Code [USC] 42 §300f) as an aquifer that contains water with total dissolved solids (TDS) less than 10,000 mg/L. Also, CCUS projects should be designed and operated in a manner that prevents injected CO_2 from leaking into overlying USDWs. The Cook Inlet Aquifer System encompasses floodplains along the Susitna River, the Matanuska River, and other smaller drainages as well as coastal lowlands along northern Cook Inlet. The aquifer is generally composed of alluvium and glacial outwash. These are relatively thick deposits made up of clay, silt, sand, gravel, and boulders. Where these deposits are locally coarse-grained (sand and gravel), they yield shallow groundwater. Depth to water is likely to be less than 100 feet throughout the system.[16] Nearly 40 shallow groundwater wells are in the project area near the Beluga Field. These wells range in depth from 20 feet to 518 feet deep.

3.1.2 Cultural

A portion of the proposed pipeline route from the mineral lease area to the Beluga River Field follows the Iditarod National Historic Trail. The Beluga Field is bordered on the northeast by the Susitna Flats State Game Refuge and on the southeast by the Cook Inlet (Figure 1).

3.1.3 Habitat

The upper Cook Inlet is designated as a critical habitat for the Cook Inlet Beluga Whale. The Beluga River Field and the adjacent secondary storage fields (Lewis River, Ivan River, and Pretty Creek) are located inside or intersect the Susitna Flats State Game Refuge. The 300,800-acre refuge is managed by the Alaska Department of Fish and Game (ADF&G) to ensure the protection of fish and wildlife populations and habitat and provide public opportunities for wildlife viewing, recreation, and the use of fish and wildlife and their habitats. Extra care will be taken with respect to any activities that could potentially affect these environmentally sensitive areas.

[15] Hilcorp testimony to Alaska Oil and Gas Conservation Commission for Conservation Order 802, April 12, 2022.
[16] Alaska LNG, 2015, www.arlis.org/docs/vol1/AlaskaGas/Report4/Report_AKLNG_2015_DRR/AKLNG-DraftResourceReport2.pdf (accessed June 2023).

3.2 Pore Space Ownership and Surface Owners Potentially Impacted

The Cook Inlet is dominated by rural landscape and agricultural development. Based on a review of landowner maps of the Beluga Field area, it is expected that a contract for pore space leasing with several landowners would need to be arranged. These owners include the State of Alaska and Cook Inlet Region, Inc. (CIRI), an Alaskan Native region corporation. CIRI has submitted a letter in support of this ARCCS project. In the repurposing of a depleted gas field, there may be the need to work with existing mineral owners for the storage of CO_2.

3.3 Population Center Analysis – Potential Conflicts and Mitigation Strategies

The targeted geologic storage complex in this region of Alaska includes the south-central portion of Matanuska-Susitna Borough (Figure 1). The nearest community to the Beluga River Field is Beluga, a census-designated place (CDP) with a population of 34. The nearest community to a proposed secondary storage area is Skwentna with a population of 62. Other population centers in this area of Alaska include Anchorage (pop. 249,252) and Point MacKenzie (pop. 1852). Based on the community analysis, no black swan scenarios (low-probability, high-impact factors) are foreseen due to macro-level social factors for the proposed project. While the potential exists for some landowner/mineral opposition to pore space leasing, if there is at least 62.5% commitment, the Alaska unitization statute allows for the integration of the minority percentage of mineral owners (pore space is considered a mineral in Alaska). Because Phase II is a feasibility study, potential community impacts are minimal. The proposed 2D seismic line acquisition will be entirely in the remote portions of Alaska, and the temporary and de minimis nature of the planned activity along with the lack of any long-term or regional consequences suggest that this part of the project will not present adverse impacts to any communities. At this time, no potential conflicts are expected. However, if conflicts are discovered through the outreach activities of this project, mitigation strategies will be developed in cooperation with local stakeholders.

3.4 Existing Resource Development

The proposed prime CO_2 storage scenario takes advantage of existing resource development infrastructure, ROWs, and knowledge associated with unitized gas fields in the northern Cook Inlet area (Figure 4). The primary CO_2 storage target is the nearly depleted Beluga River Field. This gas field was developed starting in 1962 and now has 25 wellbores.

3.5 Pipeline ROWs

As shown in Figure 1, there is an existing approved pipeline ROW that extends from near the proposed Susitna power plant to the heart of the primary CO_2 storage area. If CO_2 capture were to be installed on the two select existing gas-fired power plants in Anchorage, transportation to the storage facility would follow the existing ENSTAR natural gas pipeline ROW (Figure 4).

4.0 CO_2 TECHNICAL ANALYSIS

4.1 Commitment of CO_2 Sources

A list of potential CO_2 sources is in Table 1. Each of these organizations has provided a letter of support for the ARCCS feasibility study and has expressed consideration of directing captured CO_2 to the storage facility should the feasibility study show a positive result. The identified CO_2 sources would satisfy the minimum contribution of 50 million metric tons of CO_2 within a 30-year period. Letters of support are provided in the proposal package.

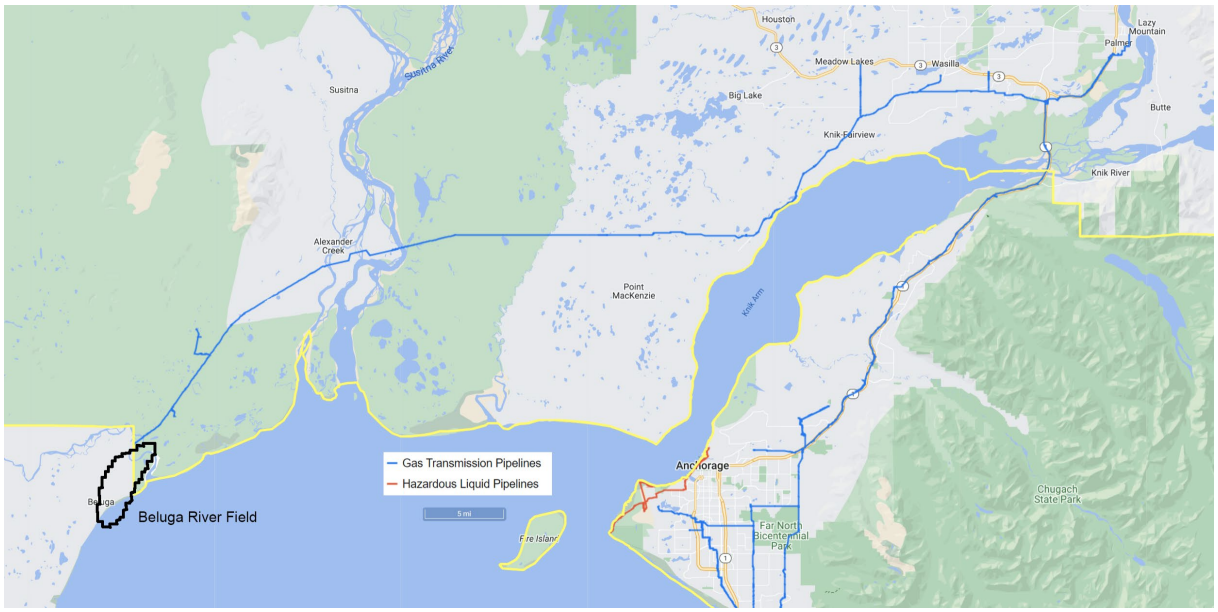

Figure 4. Map showing existing ENSTAR pipeline route from the Beluga River Field to Anchorage. Source: National Pipeline Mapping System (NPMS).

4.2 CO_2 Source Analysis

The planned new Susitna power plant would be designed to deliver its nominally 2.6 Mtpa of captured emissions at a purity of greater than 90% CO_2. The final CO_2 purity level will be determined during a future FEED study. However, any chemical impurity constraints dictated by either the pipeline specifications or the geochemistry of the storage formation will be addressed at the capture facility. Nearly 800,000 mtpa of CO_2 is emitted from the identified existing CO_2 sources (Table 1). Any future CO_2 capture facilities associated with these sources would be engineered to deliver a stream with >90% CO_2 and with levels of impurity low enough so as not to impact pipeline or reservoir integrity/ performance.

4.3 Pipeline Requirements

For any potentially new pipelines, pipeline and construction are permitted through ADNR. Local planning and zoning permits for pipelines will be obtained from the boroughs intersected by the finalized pipeline route. In addition, the State Pipeline Coordinator section of ADNR would regulate the pipeline from the capture facility to the injection well. As such, the pipeline will be designed to incorporate the requirements set out by these jurisdictions as well as to accommodate the CO_2 streams contained within them. The pipeline system will adhere to the monitoring and evaluation requirements set forth by federal, state, local, or other jurisdictions that the pipeline system will intersect or is required to adhere to. In addition, the CO_2 stream will be dehydrated or otherwise treated to maintain the integrity of the pipelines, providing the transportation of the stream from the source to the storage complex throughout the life of the project, with routine monitoring being conducted during the construction, operation, and close-out phases to ensure that the pipeline and associated equipment maintain integrity throughout the life of the system(s).

4.4 CO_2 Pipeline ROWs Analysis

CO_2 captured at the proposed new dual-fuel capable power generation plant would be shipped via a pipeline approximately 60 miles to the Beluga River Field. The CO_2 pipeline would follow a portion of the permitted existing gas pipeline route for the proposed Donlin Gold Mine (Figure 1). If necessary, the distribution of CO_2 to the other abandoned gas fields would follow preexisting pipeline routes (Figure 4).

A portion of the pipeline route would pass through the Susitna Flats Game Refuge managed by ADF&G. The ROW would be within the Pretty Creek public road easement through most of its route through the refuge. Overall, the pipeline would be consistent with the goals of the refuge management plan, and no direct or indirect effects would occur to the state's land use management within the refuge. The portion of the pipeline within the refuge would require a special use permit from ADF&G. Cook Inlet beluga whales are the only Endangered Species Act-listed species potentially impacted by the pipeline project. These whales are common in upper Cook Inlet, including in the vicinity of the Beluga River and Beluga barge landing. Potential effects on beluga whales would be primarily due to the transportation of pipe and supplies via barges for the construction of the pipeline.

5.0 STAKEHOLDER ANALYSIS

The greater project area that may be impacted by the proposed project encompasses three CDPs, Beluga, Skwentna, and Point MacKenzie; and the city of Anchorage (Table 4). Of the four communities mentioned, the prime location of the geologic storage project and resulting CO_2 plume will only have potential impacts on the Beluga CDP which sits directly over the Beluga River gas field (Figure 1).

Table 4. Communities in the Area of the Proposed ARCCS Project

Community	Area, sq mi	Population, 2020	Population Density, persons/sq mi
Beluga CDP	100	34	0.34
Skwentna CDP	450	62	0.14
Point MacKenzie CDP	150	1852	12
Anchorage (urban)	92	249,252	2718

CDPs are a statistical geography representing closely settled, unincorporated communities that are locally recognized and identified by name.

5.1 Community and Stakeholder Engagement Plan

Identifying societal considerations and impacts of the project and creating audience-specific engagement strategies are key elements of effective public engagement where stakeholders can become project partners. As described in the community and stakeholder engagement plan (CSEP) development proposal, the project partners have the extensive regional knowledge, community relationships, and collective experience to produce and implement a plan that will further identify and respectfully engage communities and stakeholders, invite their questions, listen to their concerns, inform their understanding of CCUS, and document the public view of all aspects of geologic CO_2 management within the study region during the feasibility phase and subsequent phases of the project should they be approved.

Engagement activities will be managed by UAF and the EERC. UAF will have final approval of all materials prior to release. In keeping with the best practices outlined in the 2017 update of the Regional Carbon Sequestration Partnerships (RCSPs) Best Practices Manual and based on the experience of the PCOR Partnership, outreach task activities will be coordinated with project development plans and the leadership team. The project team will liaise with other outreach efforts through a project outreach advisory group featuring outreach specialists from project partners and key stakeholders.

Phase II efforts will build on project partner EERC's PCOR Partnership outreach effort, which has been active since 2003; the successful North Dakota CarbonSAFE Phase II project; the ongoing North Dakota CarbonSAFE Phase III project; and the now-commercial Red Trail Energy CCS project with a program of project-focused and broadly based general outreach on CCUS. The PCOR Partnership's project-related outreach activities range from content on the PCOR Partnership public website to participation on outreach advisory panels, custom project-focused outreach materials, and engagement with local

stakeholders. Regional outreach has been accomplished through original documentaries broadcast on public television as well as participation in educator workshops, library conferences, and decision-maker forums. The EERC's core CCUS outreach team is complemented by technical CCUS experts as well as specialists in media relations, graphics, editing, and web programing.

Hilcorp Energy Company

Joint House & Senate Resources Committee

February 7, 2024

[1] RS 24-031
IM 24-061

Hilcorp Alaska Overview

Highlights

~1,500
Employees

4 Drill Rigs
In Cook Inlet Basin

3 Drill Rigs
On North Slope

22 Cook Inlet Basin Wells
Drilled in 2022

18 Cook Inlet Basin Wells
Drilled in 2023

Asset Overview

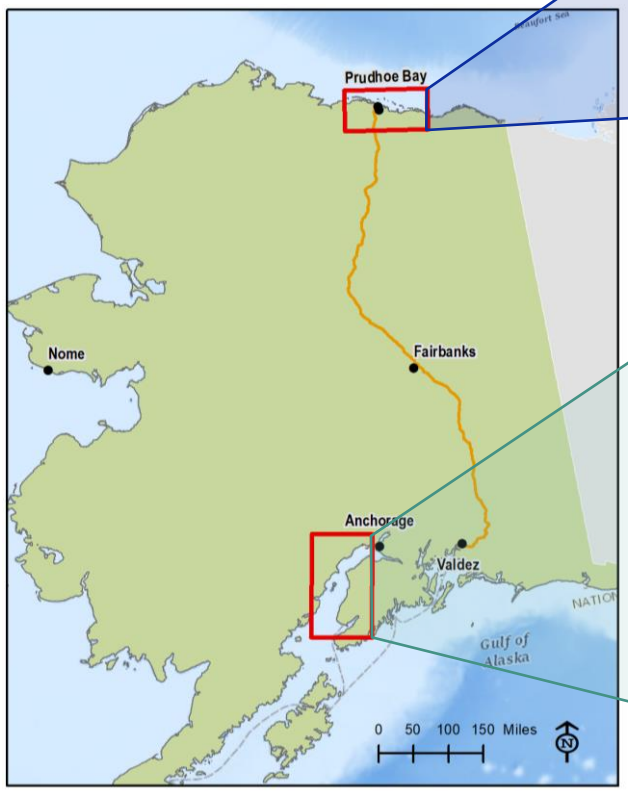

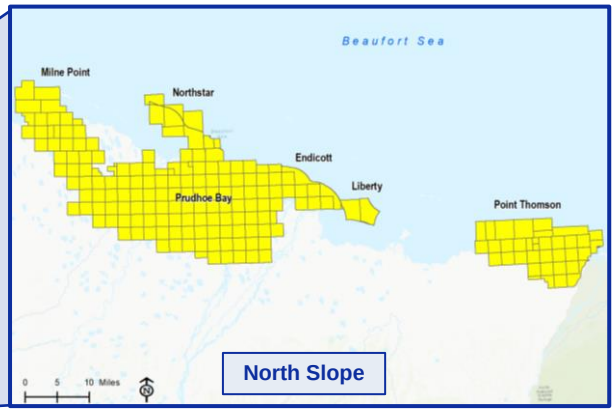

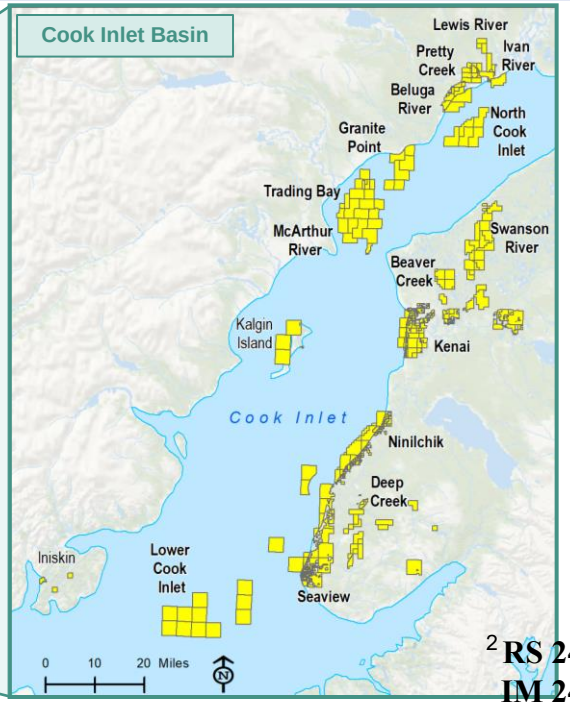

RS 24-031
IM 24-061

Cook Inlet Basin Gas

- **Hilcorp is committed to the Cook Inlet Basin**
- **Hilcorp is fully developing its leasehold**
  - Hilcorp has produced over 700 Bcf of gas since entering Alaska
  - Hilcorp has spent well over $1.0 billion in the Cook Inlet Basin
  - Hilcorp is increasing activity in Cook Inlet Basin
  - Drilled 153 wells since 2011 and plans to drill 15-20 wells per year going forward
- **Producing wells' production initially declines ~30% per year**
- **Cook Inlet Basin gas market is unlike any other in the United States**
- **Gas under Hilcorp's leasehold cannot meet all of the region's gas demand**

Utilities and other gas producers must identify new sources of gas supply for South Central Alaska

RS 24-031
IM 24-061

Wells Drilled in Cook Inlet Basin

Onshore and offshore 2005 to present

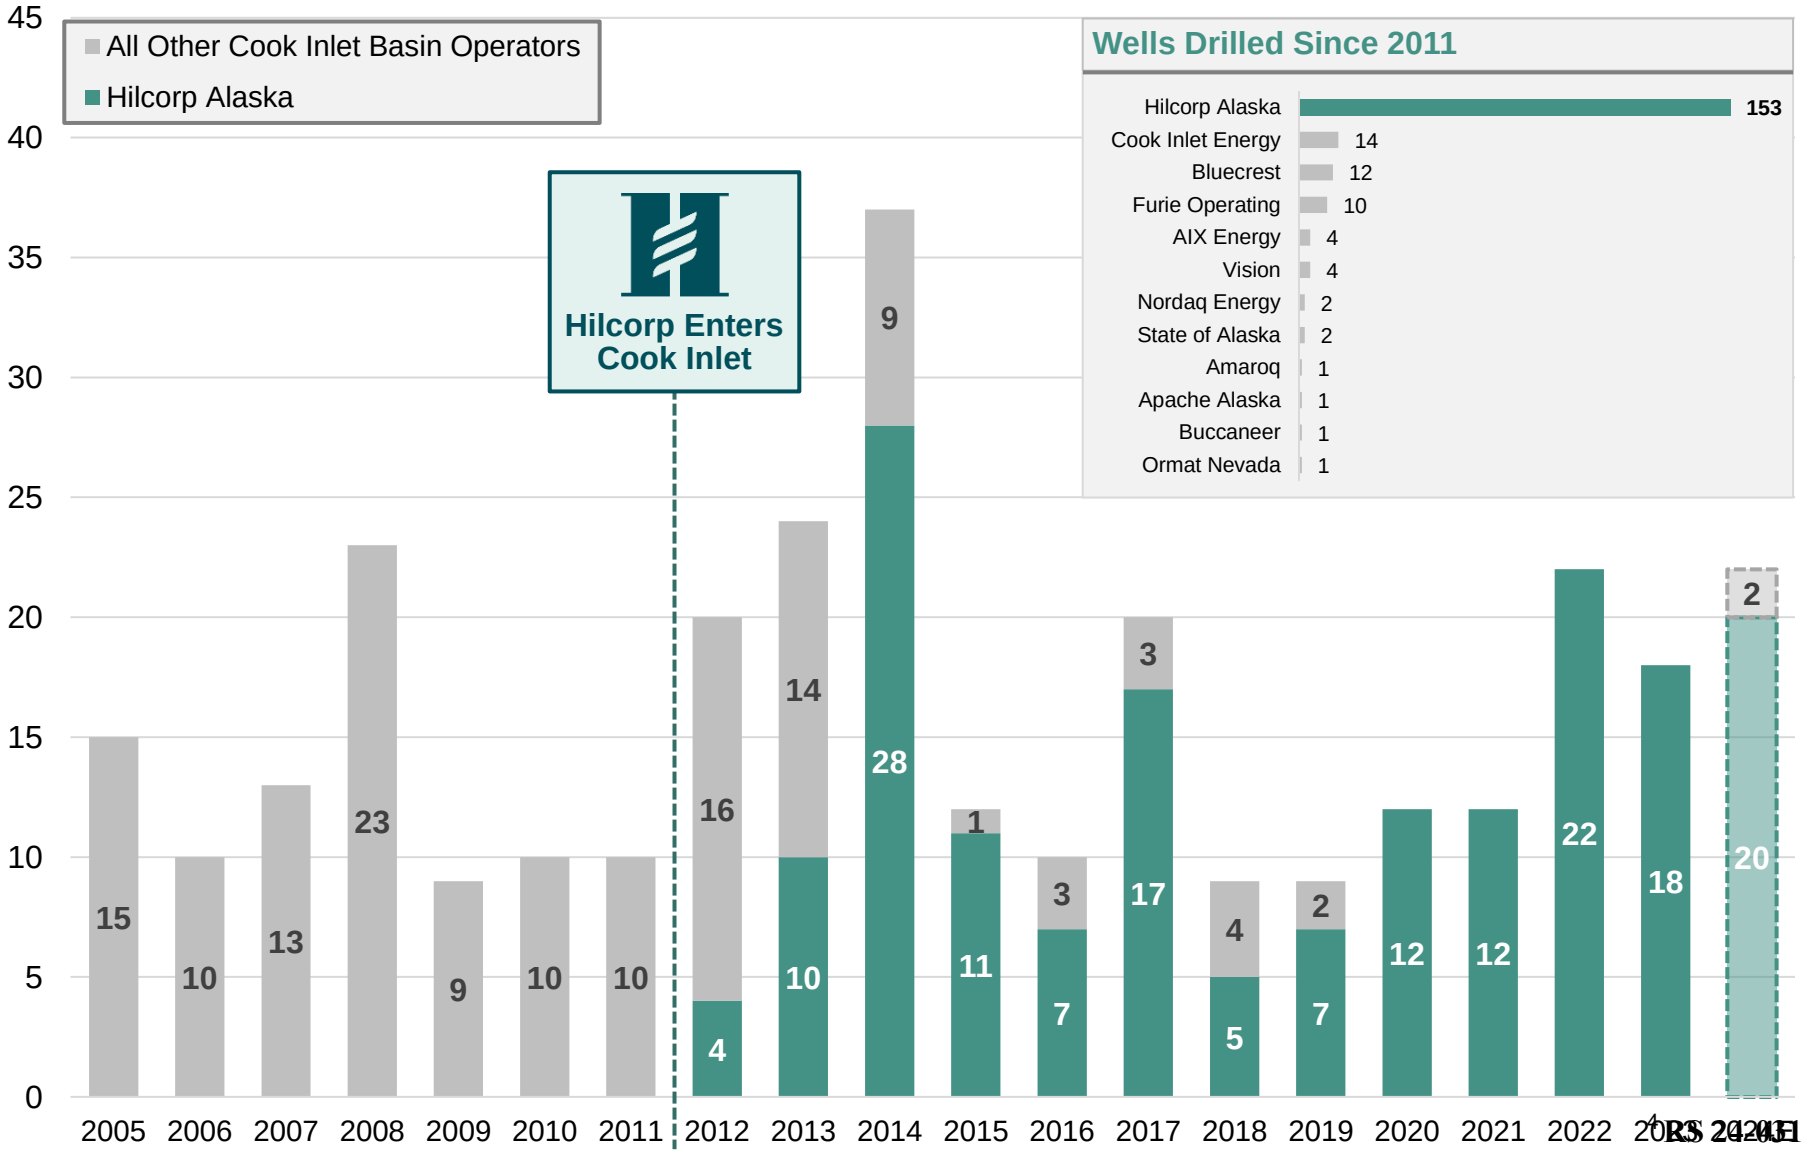

Source: Alaska Oil and Gas Conservation Commission (AOGCC)

Hilcorp Gas Contracts and Reserves

Hilcorp plans to fully develop its leasehold with 15-20 wells per year necessary to offset base decline

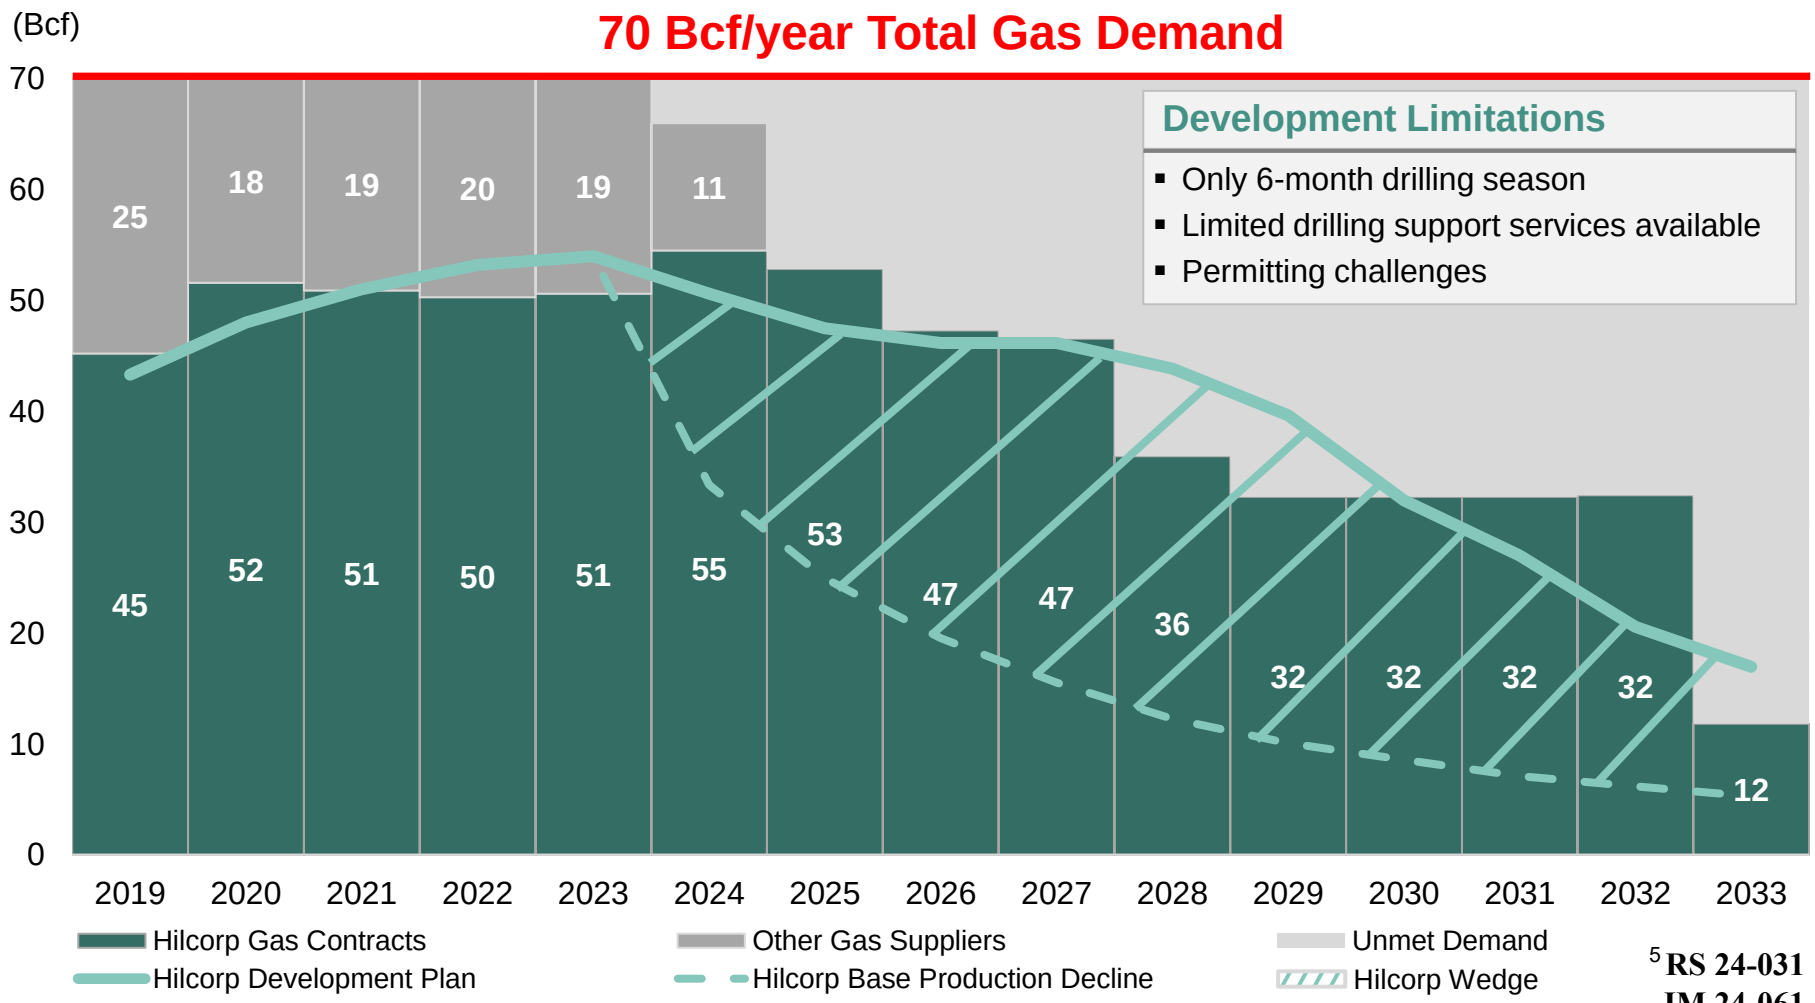

[5] RS 24-031
IM 24-061

Source: Hilcorp

Cook Inlet Gas Storage Facilities

Name	Deliverability	Storage	Wells
Pretty Creek (Hilcorp Alaska)	8 MMcfd	1.9 Bcf	1
KGSF (Hilcorp Alaska)	65+ MMcfd	3.5 Bcf	5
CINGSA	150 MMcfd	11 Bcf	5
Pool 6 (Hilcorp Alaska)	100 MMcfd	20+ Bcf	12

- **Gas storage is crucial for region**
- **Hilcorp invests heavily in gas storage reliability and redundancy**
- **Hilcorp wants to be part of the solution**

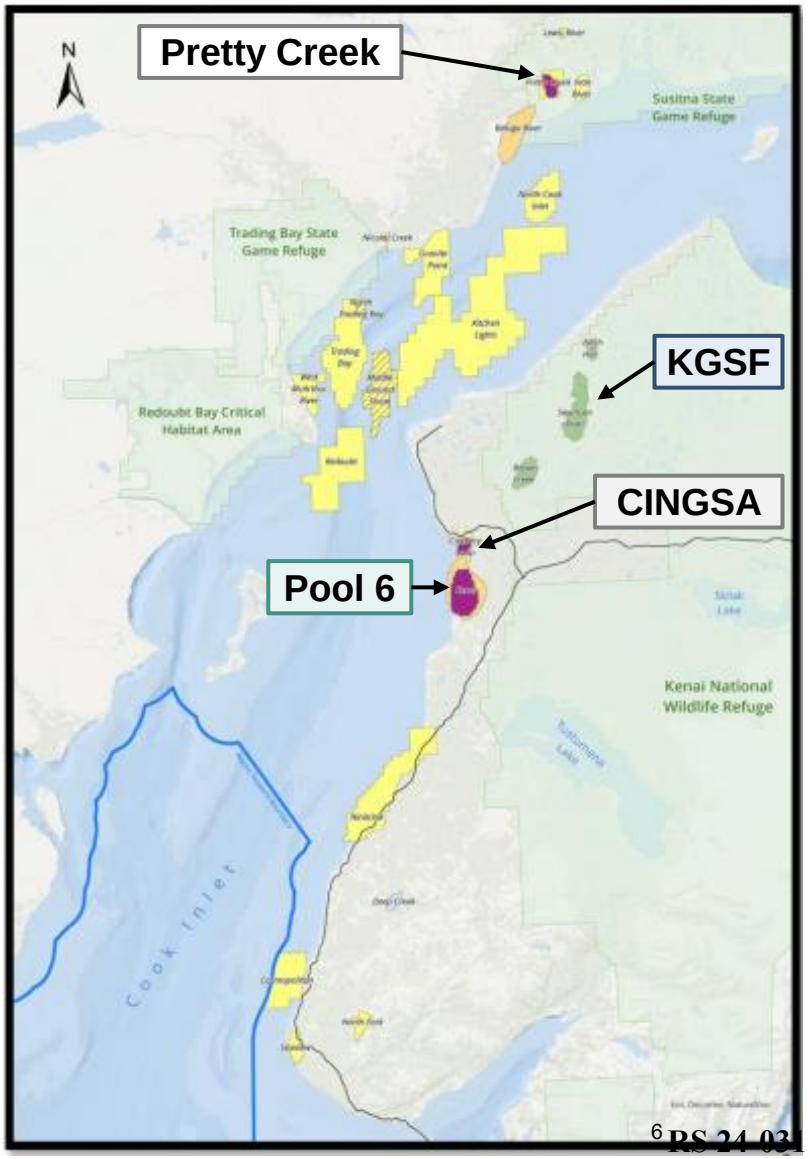

RS 24-031
IM 24-061

Thank You

Cook Inlet Update

February 7, 2024

ENSTAR
Natural Gas Company

RS 24-031
IM 24-061

About ENSTAR

- Established in 1959
- 230 employees
- 152,000 customers
- 25 communities served
- 3,560 miles of pipeline

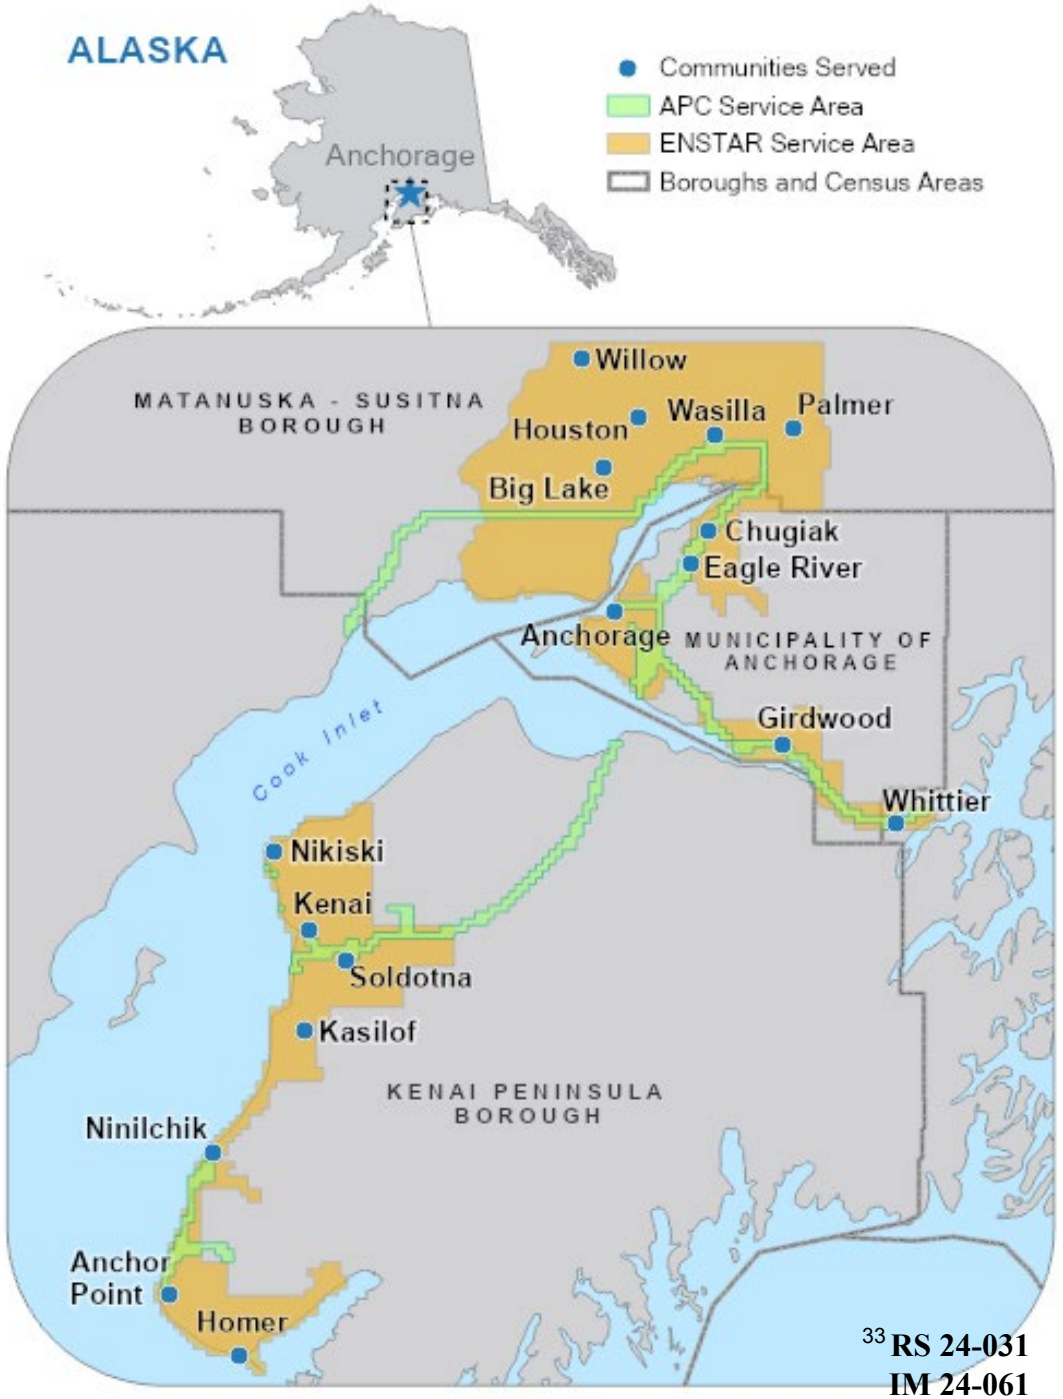

ENSTAR

RS 24-031
IM 24-061

About CINGSA

- Constructed in 2012 in response to significant concerns about Cook Inlet gas supply
- 11 Bcf storage capacity
- 150 Mmcf max injection/withdrawal
- 3 Firm Customers
- 3 Interruptible Customers
- Provides deliverability for more than 40% of ENSTAR demand on a cold day.

ENSTAR

Utility Working Group

- Hilcorp/Utilities Annual Update meeting
  - April 12, 2022
  - Stated they would not extend existing contracts
- Creation of the Utility Working Group
  - April 15, 2022
    - ENSTAR, Chugach, MEA, GVEA, HEA, IGU
      - Later included AEA, DNR
  - Hired Berkeley Research Group (BRG) – November 10, 2022

Utilities' Market View Fall '22

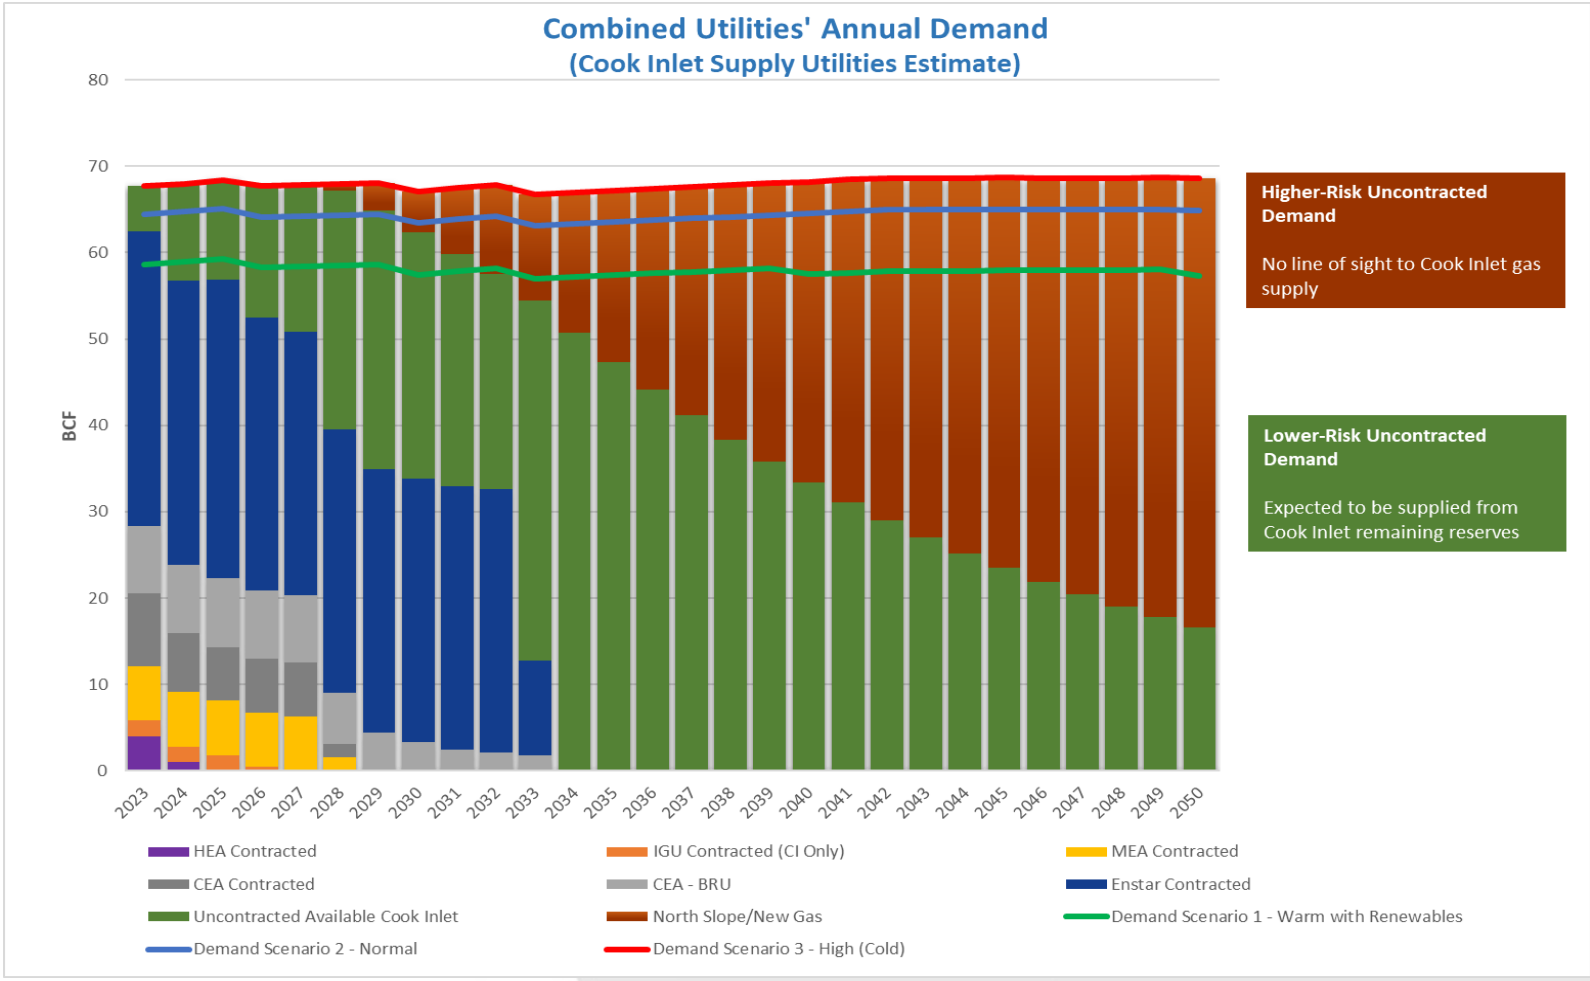

RS 24-031
IM 24-061

Gas Supply Opportunities – Phase I Assessment

	Option	Timeline	CAPEX	Throughput	Gas	Midstream	Cost of Supply
		Years	$ mm	Bcf/year	$/Mcf	$/Mcf	$/Mcf
1	Cook Inlet Gas	3 - 4	Up to $1500 - $2000	Up to ~ 23	$9.3 - $25.5	Included	$9.3 - $25.5
2 (a)	In-State Pipeline (Private)	6 - 7	~ $8,790	Up to 105	$1.3 - $2.6	$26.9 - $34.4	$28.2 - $37.0
2 (b)	In-State Pipeline (Subsidized 80%)	6 - 7	~ $8,790	Up to 105	$1.3 - $2.6	$7.8 - $10.0	$9.2 - $12.6
2 (c)	In-State Pipeline (State Owned)	6 - 7	~ $8,790	Up to 105	$1.3 - $2.6	$6.0 - 7.4	$7.3 - $10.0
3	Kenai LNG	4 - 5	$768	Up to 55	$8.6 - $8.9	$3.4 - $4.7	$12.0 - $13.6
4	Greenfield Port and Regas	6 - 7	$876	Up to 55	$8.6 - $8.9	$4.0 - $5.3	$12.6 - $14.2
4 (b)	Greenfield Port and Regas (Subsidized 80%)	6 - 7	$876	Up to 55	$8.6 - $8.9	$2.3 - $3.3	$10.9 - $12.2
4 (c)	Greenfield Port and Regas (State Owned)	6 - 7	$876	Up to 55	$8.6 - $8.9	$2.2 - $3.1	$10.8 - $12.0
5	FSRU - Own/Lease	4 - 6	$607 / $201	Up to 55	$8.6 - $8.9	$3.6 - $5.0	$12.2 - $13.9
6	Barge / Small LNG Carrier	4 - 5	$563	Up to 25	$8.6 - $8.9	$13 - $14	$21.6 - $23.0
7	Alaska LNG	7 - 8	~ $43,000	Up to 183	$1.3 - $2.6	$3.1	$4.4 - $5.8
8	LNG Truck and/or Rail	3 - 4	$321	~ 9	$2.50	$22.5 - $29.5	$25 - $32
9	RNG	Unknown	N/A	~ 1	~ $25	Included	~ $25
10	Hydrogen (green)	2035 +	Unknown	N/A	N/A	N/A	$ > 40

RS 24-031
IM 24-061

Phase II Project Team

Cornerstone Energy Services | BRG ENERGY & CLIMATE

Integrated Project Team Roles

ENSTAR and Utility Group
Strategic direction
Commercial, legal, regulatory leadership
Pipeline system, storage, existing supply integration
Public communications strategy and oversight

BRG
Project strategy advisor, local coordination
Planning of deliverables and Phase 2 project management
Gas supply project development and execution planning
LNG supply expertise and market interface
Financial and economic analysis
Project interface with Enstar, utilities, and public forums as directed by client

Cornerstone
Engineering and project cost estimates
Permitting plan
Project option technical viability and risk assessment

Additional Resources Engaged

Exp. (Alaska)

Coffman Engineers (Alaska)

Axiom Environmental (Alaska)

Cashman Preload
LNG tank experts, Alaska experience

Lloyd Engineering
Marine engineering, Alaska experience

Precision LNG
Worldwide LNG shipping expertise

Hunton Andrews Kurth LLP
Regulatory / Permitting legal experts

ENSTAR

Summary Findings for Schedules – Phase II

- None of the Options meet the LNG demands for the 4-year milestone (first gas 4Q2027)
- Greatest time unknowns are related to FERC and US Corp of Engineers permitting durations, time to modify or construct in-water piers
- Risks are high for FSRU Options due to tides and winter effects at Cook Inlet
- Long-lead procurement items must be started and commercial agreements concluded before permits are issued

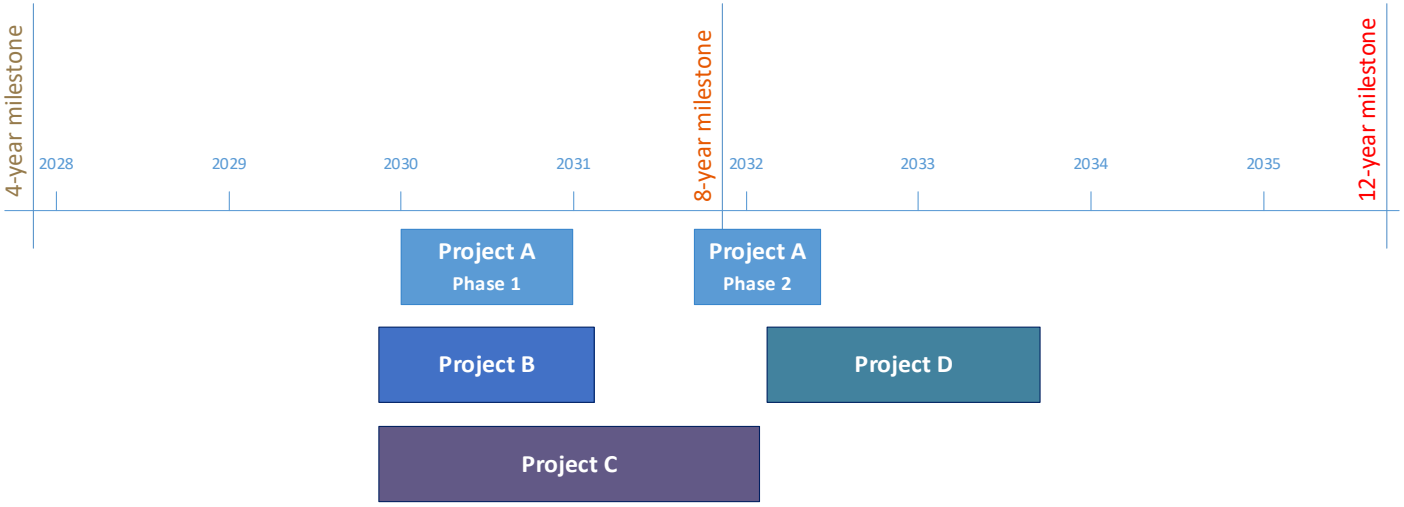

2010 vs. 2024

- In 2010, Cook Inlet utilities faced similar concerns under different circumstances.
- CINGSA is proof that legislative support for energy security matters.
- Today, quick, bold action is required to serve this region in the short and long-term.
- Additional storage is required under any scenario and should be regulated for price transparency.

Cook Inlet Demand (Source: DNR 2024)

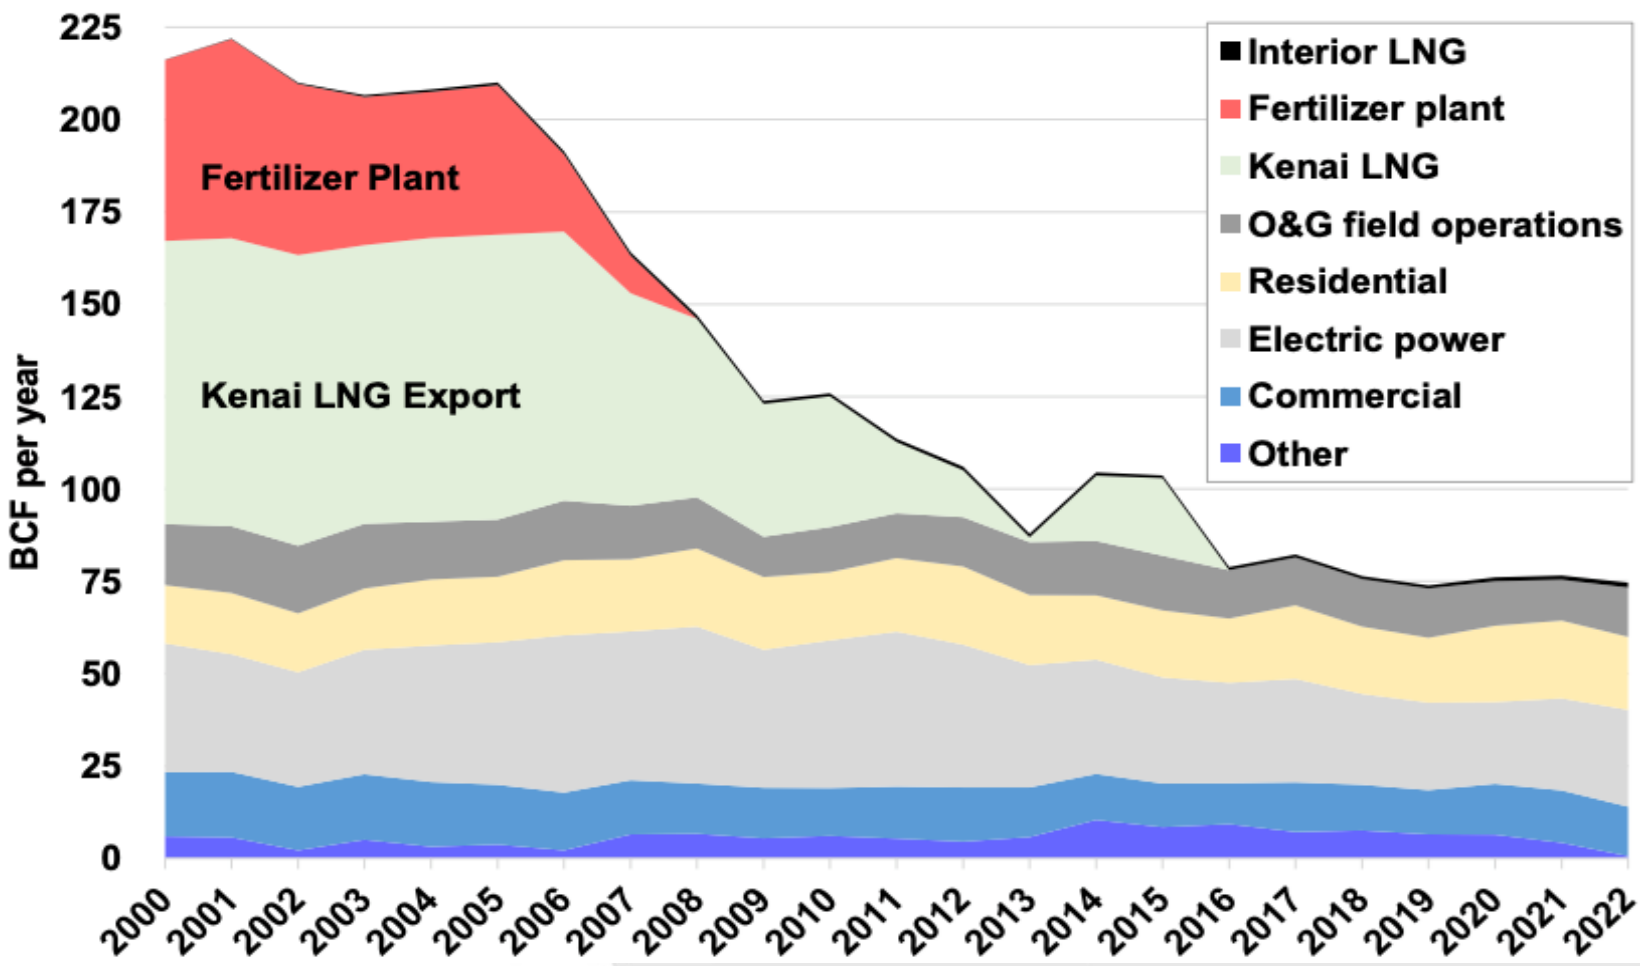

RS 24-031
IM 24-061

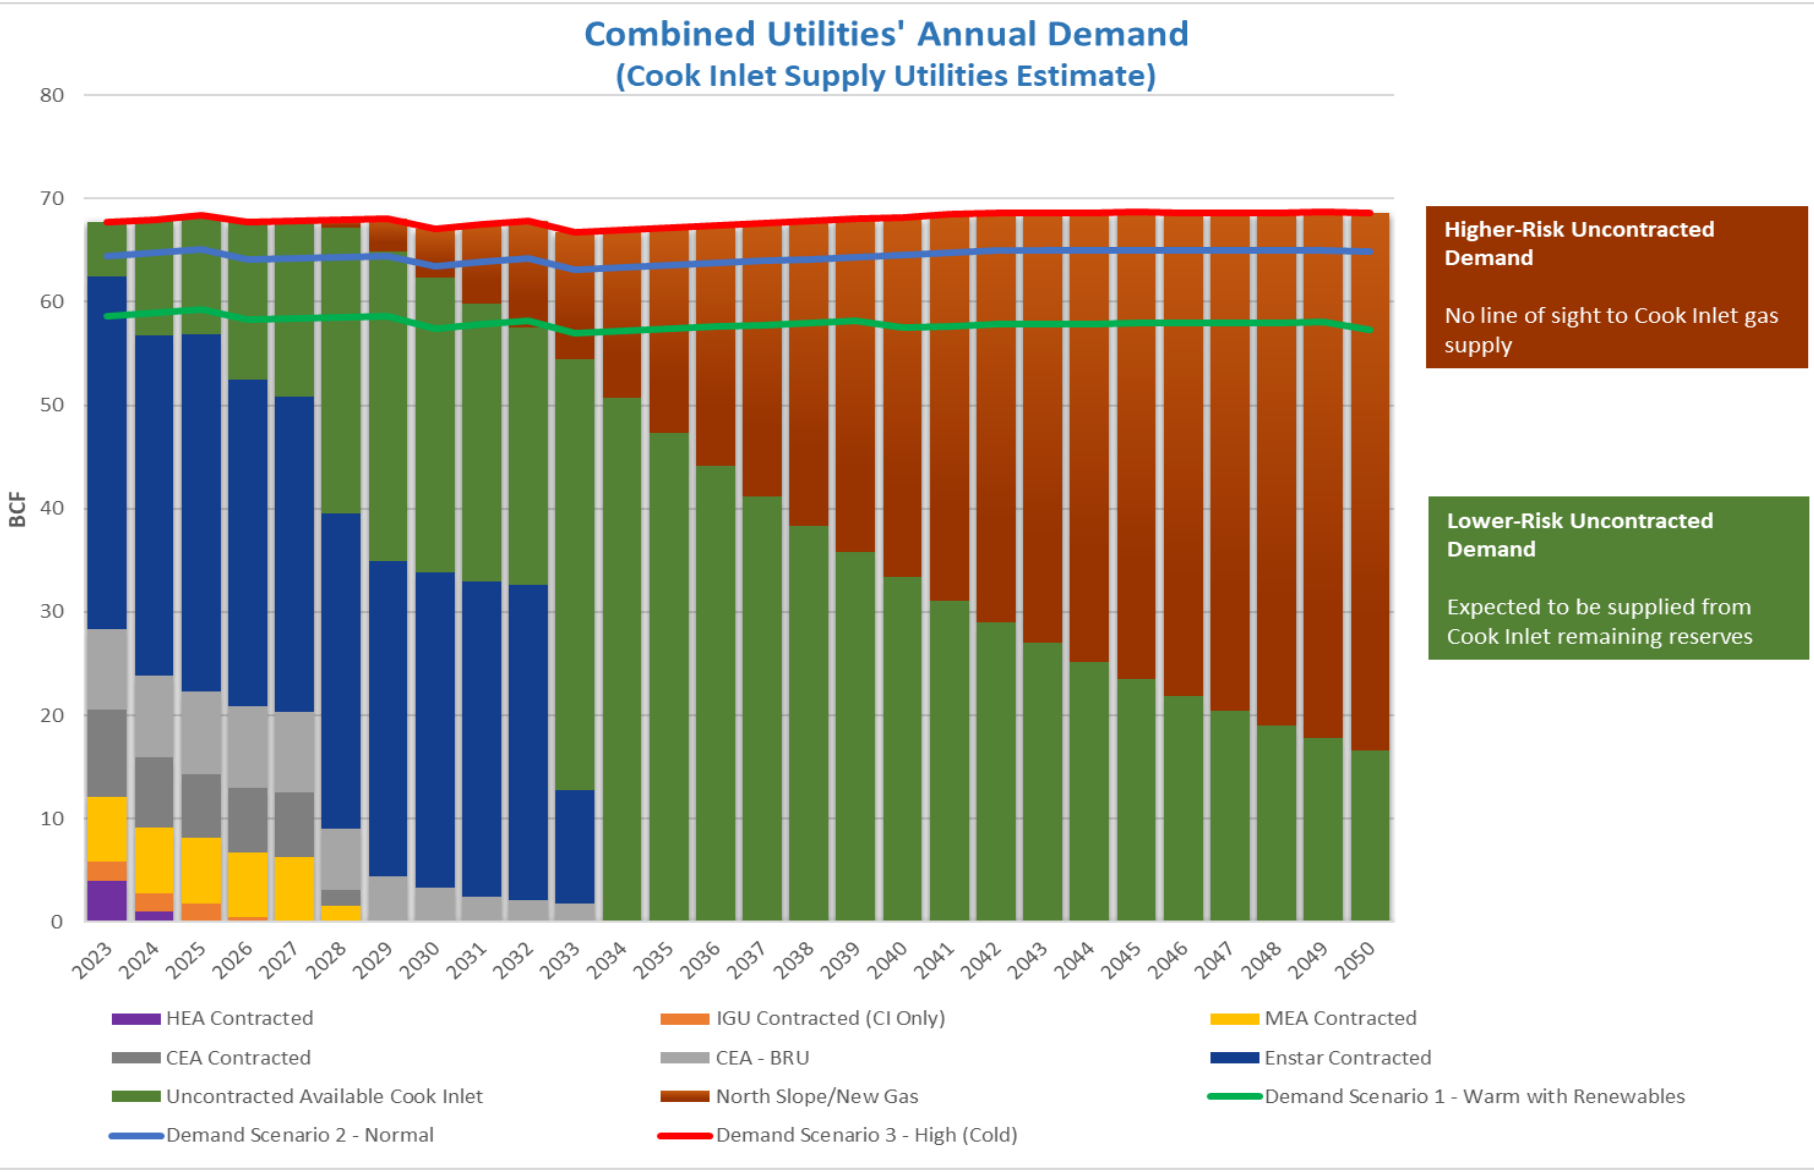
Combined Utilities' Annual Demand
(Cook Inlet Supply Utilities Estimate)
BCF
80
70
60
50
40
30
20
10
0
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
Higher-Risk Uncontracted Demand
No line of sight to Cook Inlet gas supply
Lower-Risk Uncontracted Demand
Expected to be supplied from Cook Inlet remaining reserves
HEA Contracted
IGU Contracted (CI Only)
MEA Contracted
CEA Contracted
CEA - BRU
Enstar Contracted
Uncontracted Available Cook Inlet
North Slope/New Gas
Demand Scenario 1 - Warm with Renewables
Demand Scenario 2 - Normal
Demand Scenario 3 - High (Cold)

Cook Inlet Demand (Source: DNR 2024)

Contract Terms	All Requirements	Firm	Interruptible	Spot
Meets 100% deliverability?	✓	✗	✗	✗
Provided under contract?	✓	✓	✓	✗
Penalty for non-delivery? (Cover)	✓	✓	✗	✗
Allows for multi-year gas supply planning?	✓	✓	✗	✗
Set price?	✓	✓	✗	✗
Set quantity?	✓	✓	✗	✗
Set terms?	✓	✓	✗	✗
Not subject to changing market or operating conditions?	✓	✓	✗	✗

ENSTAR

Utility Duty to Serve

- This duty is not shared by producers, IPPs, or anyone else in this state. It is our obligation alone.

Sec. 42.05.291. Standards of service and facilities. (a) Each public utility shall furnish and maintain adequate, efficient, and safe service and facilities. This service shall be reasonably continuous and without unreasonable interruption or delay.

What now?

- Timely actions is required to avoid a gap in supply.
  - Short-term: Need strong support for Cook Inlet exploration and production activities.
  - Long-term: Decisive action on a large natural gas supply project.
- Ultimately, customers - Alaska residents and businesses - are on the hook for cost impacts.
- Working to minimize impact, but longer we wait, the fewer options available and at higher rates.

“What can the State do?”

ENSTAR
Natural Gas Company

Additional storage is key

- Under every scenario, additional natural gas storage is required:
  - Added Cook Inlet deliverability
  - Support new projects coming online
- In November, CINGSA filed with the RCA to expand its facility to provide additional service

Home Energy Rebate Program

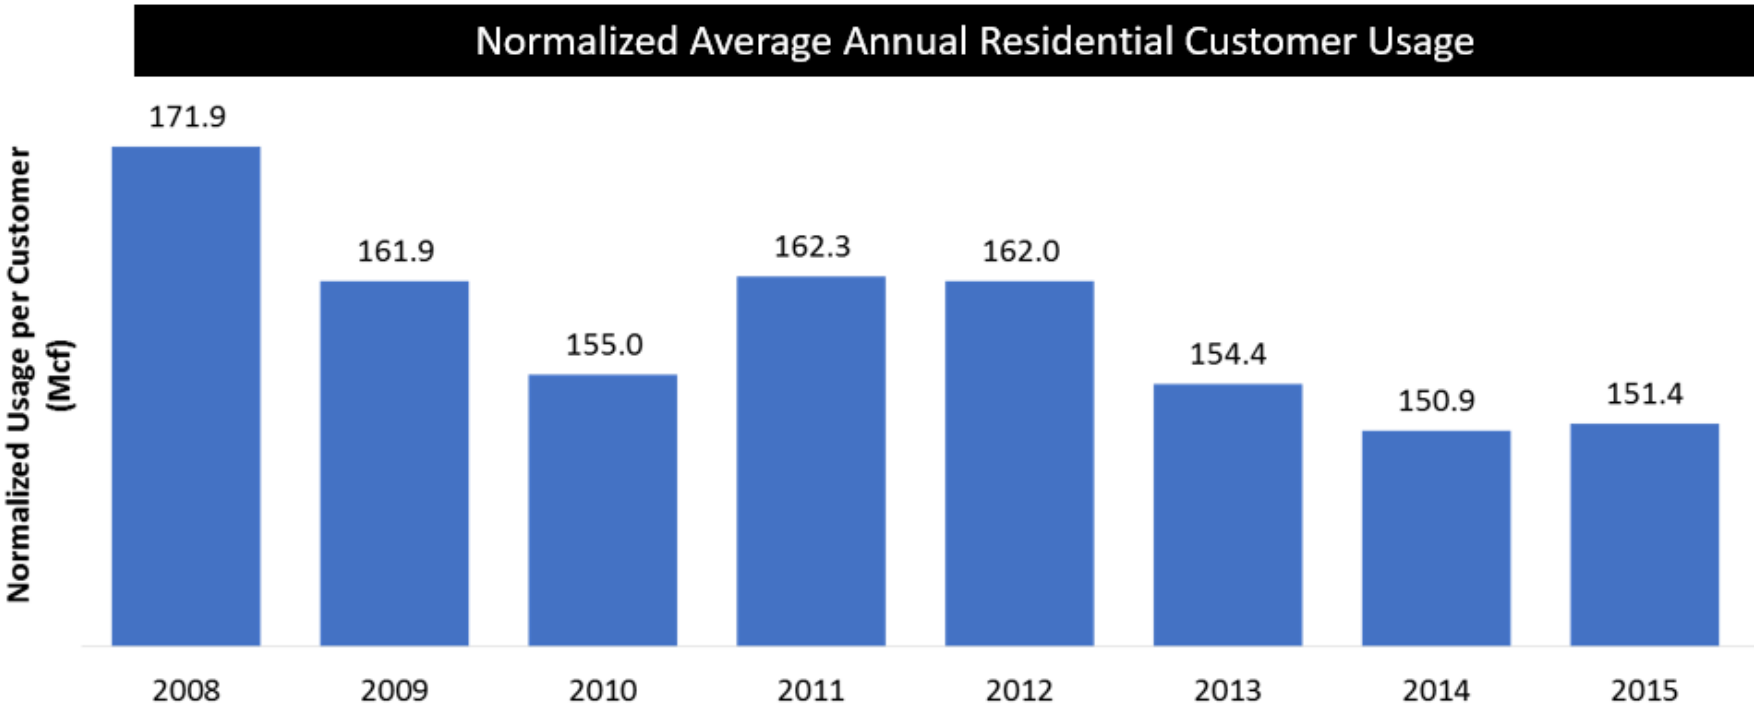

Cook Inlet Energy: An Alaska issue

- Energy costs in Rural Alaska.
- Local businesses support communities beyond Anchorage with cargo, goods, and services.

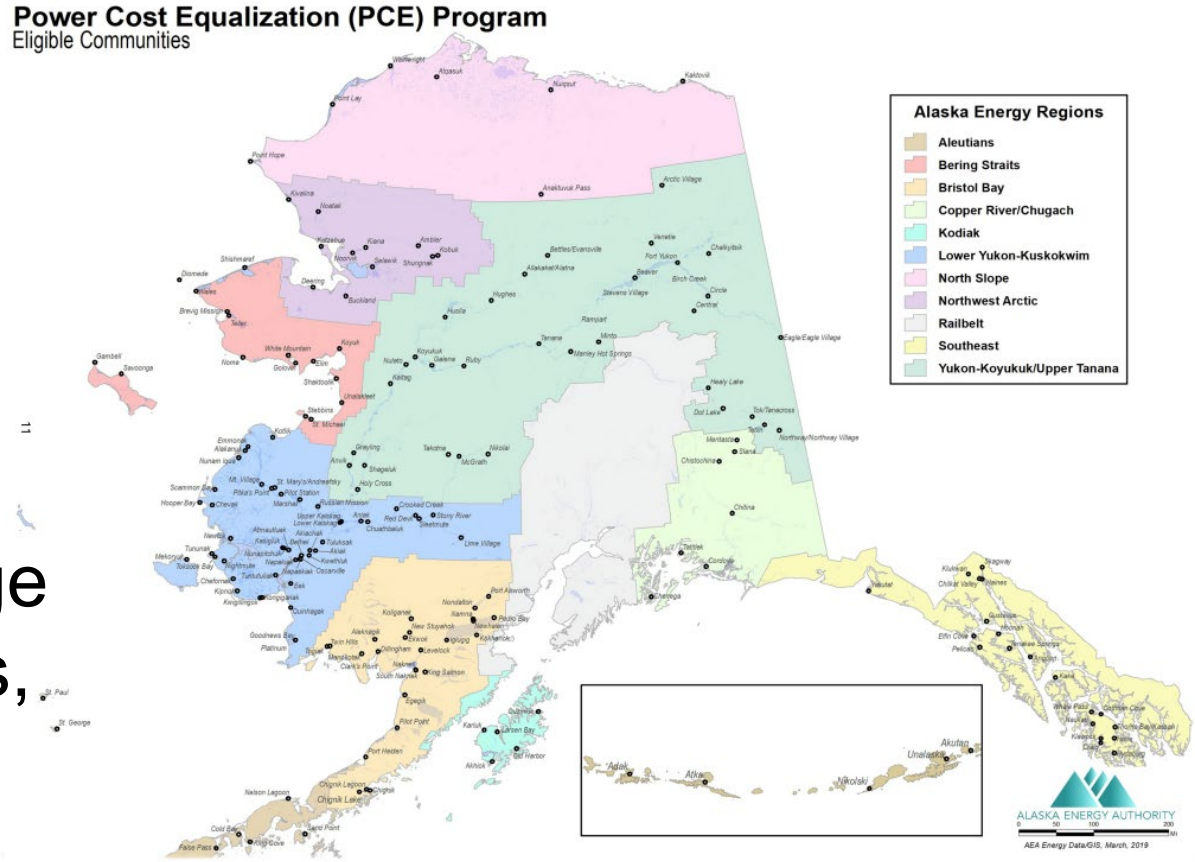

Key Considerations

- There is no unsubsidized energy solution that will reduce the cost of power or space heating in the next 10 years.
- Any incentive or tax relief must be linked to firm contracts for Cook Inlet utilities.
- The second worst thing for Alaska is to import LNG. The worst thing is to do nothing.

Questions

ENSTAR Natural Gas Company

The CCUS workgroup mission is to accelerate commercial carbon capture in Alaska

Alaska CCUS Workgroup

SPE Paper 213051: "*Alaska CCUS Workgroup and a Roadmap to Commercial Deployment*"
Frank Paskvan, Brent Sheets, UAF-INE (University of Alaska Fairbanks - Institute of Northern Engineering), et. al.

Download paper from http://INE.UAF.EDU/Carbon by selecting item #6 or https://doi.org/10.2118/213051-MS

For more information see http://INE.UAF.EDU/Carbon or email CCUSAlaska@gmail.com

UAF-INE Work on CCUS

Institute of Northern Engineering
University of Alaska Fairbanks

- In 2019, began work on Carbon Capture Use and Storage (CCUS) per Congressional Delegation
  - UAF-INE joined PCOR, Plains CO_2 Reduction Partnership, led by EERC at U. of North Dakota
- In 2022, initiated Alaska CCUS Workgroup to engage industry, government, academia, and stakeholders
  - Supported Carbon Storage Legislation bill drafting
  - Offered to perform industry studies;
    Power generation CCUS feasibility study suggested;
    Finalizing report now, sharing preliminary results today.
- In 2024, initiating ARCCS Project to determine CO_2 storage volumes
- In 2024, applied for Regional Initiative for Technical Assistance Partnerships (RITAP) DE-FOA-3014 to continue Workgroup and to expand CCUS technical support including UAF's B.S. Energy Resources Engineering department

PCOR Partnership
Plains CO_2 Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

COOK INLET REGION
LOW CARBON POWER GENERATION WITH
CARBON CAPTURE, TRANSPORT, AND STORAGE
FEASIBILITY STUDY

Topical Report

Low Carbon Emissions and Economic Analysis: Coal versus Natural Gas Generation – Alaska Railbelt Electricity Grid and New Industrial Demand

Cooperative Agreement No. DE-FE0031838

Prepared by:
Thomas P. McGuire, EERC
Joshua R. Strege, EERC
Randy Hobbs, Hobbs Industries, Inc.
Kalb Stevenson, Axiom Environmental, Inc.
Frank Paskvan, UAF-INE

Reviewed by:
Brent Sheets, UAF-INE
Kevin C. Connors, EERC
Wesley D. Peck, EERC

Energy & Environmental Research Center (EERC)
University of North Dakota
15 North 23rd Street, Stop 9018
Grand Forks, ND 58202-9018

Institute of Northern Engineering (INE)
University of Alaska Fairbanks (UAF)
PO Box 755910
Fairbanks, AK 99775-5910

Institute of Northern Engineering
University of Alaska Fairbanks

February ??, 2024

RS 24-031
IM 24-061

What is CCS?

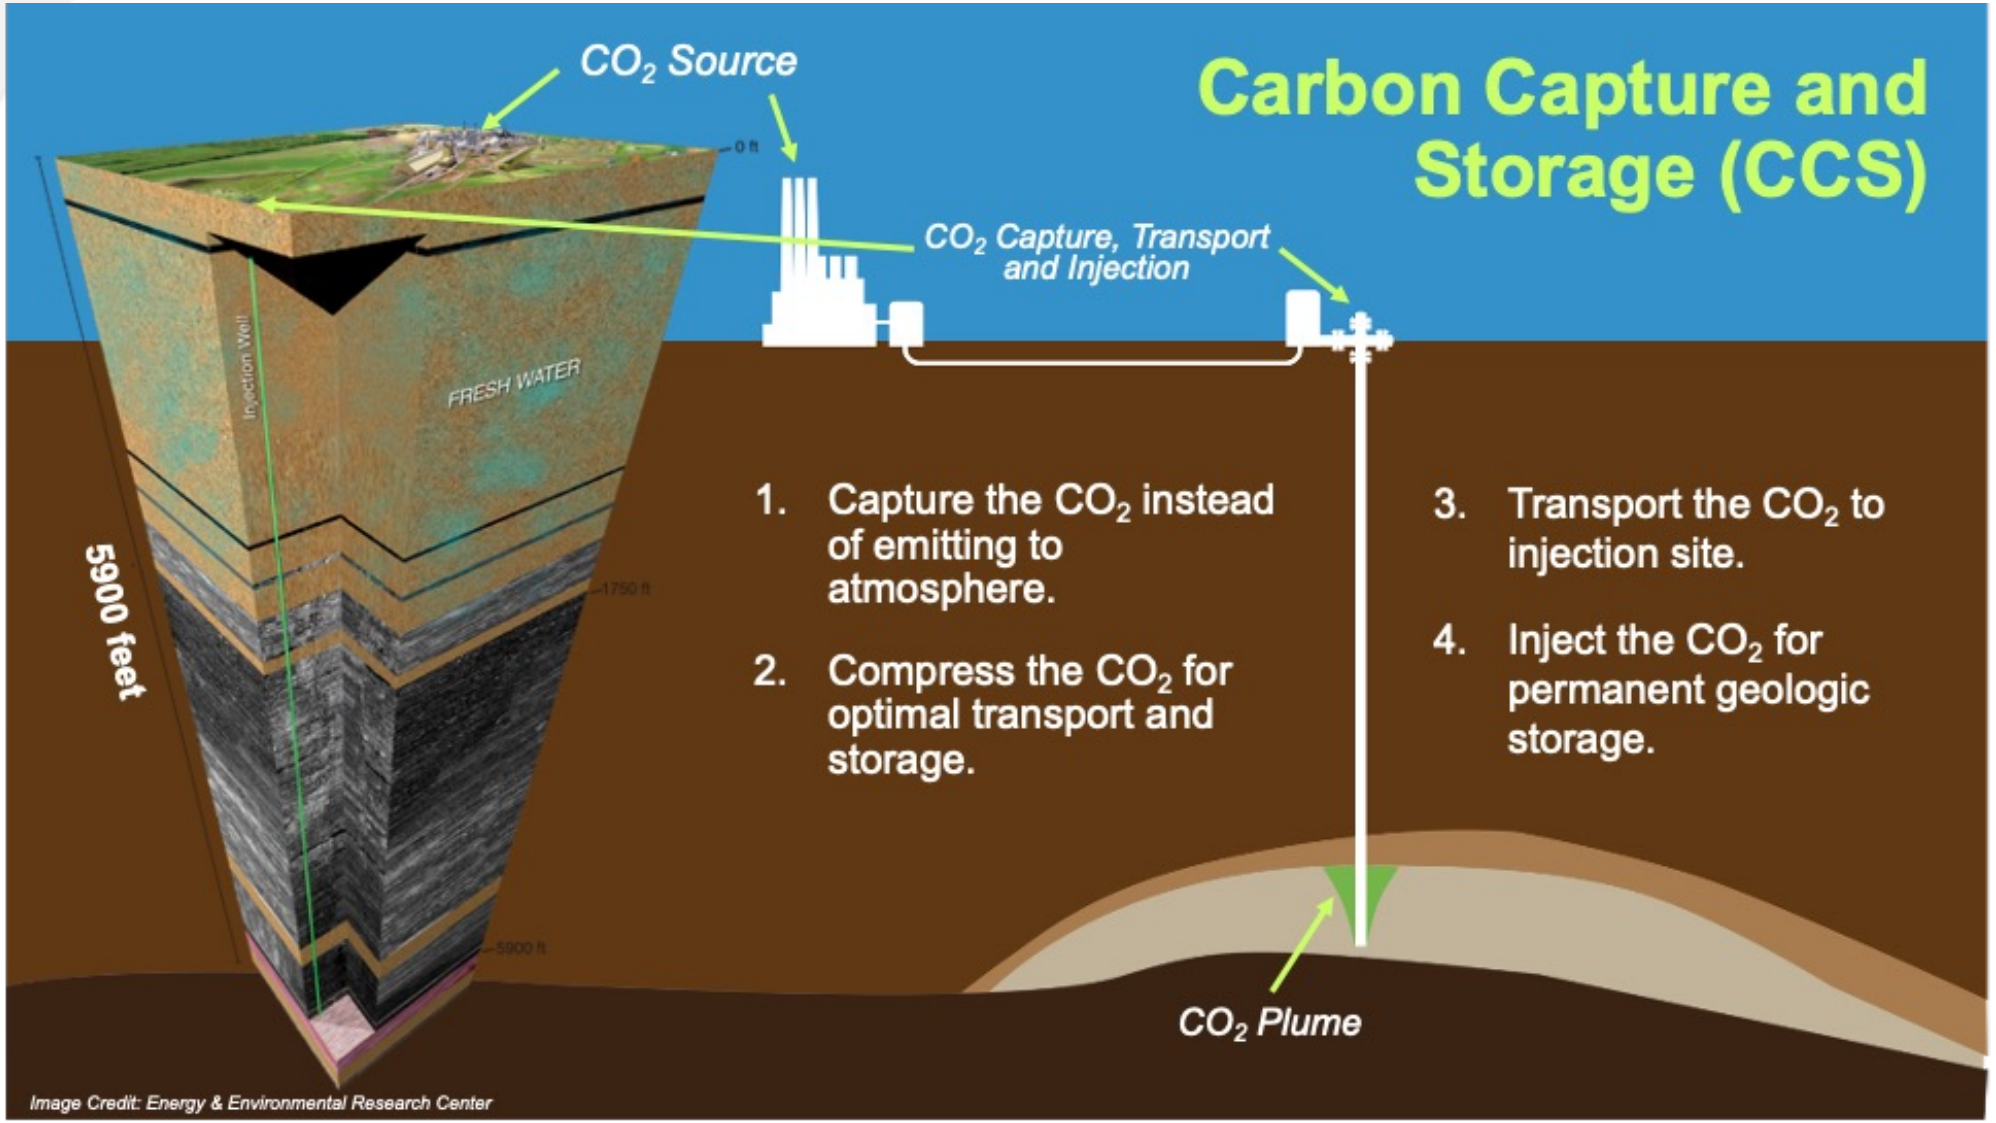
Carbon Capture and Storage (CCS)
CO_2 Source
CO_2 Capture, Transport and Injection
FRESH WATER
Injection Well
5900 feet
0 ft
1750 ft
5900 ft
1. Capture the CO_2 instead of emitting to atmosphere.
2. Compress the CO_2 for optimal transport and storage.
3. Transport the CO_2 to injection site.
4. Inject the CO_2 for permanent geologic storage.
CO_2 Plume
Image Credit: Energy & Environmental Research Center

Why CCUS?

- World faces dual challenge of increasing energy demand and risks of climate change
- Carbon (CO_2) Capture and Storage (CCS) also removes other pollutants
- CO_2 Use (CCUS) like agriculture can make electricity net zero emissions, support food and energy security
- Cost for clean energy security more than doubles without CCUS[1]
- CO_2 Emissions Reductions may be Voluntary or Required, e.g. by Clean Air Standards like WA-GREET

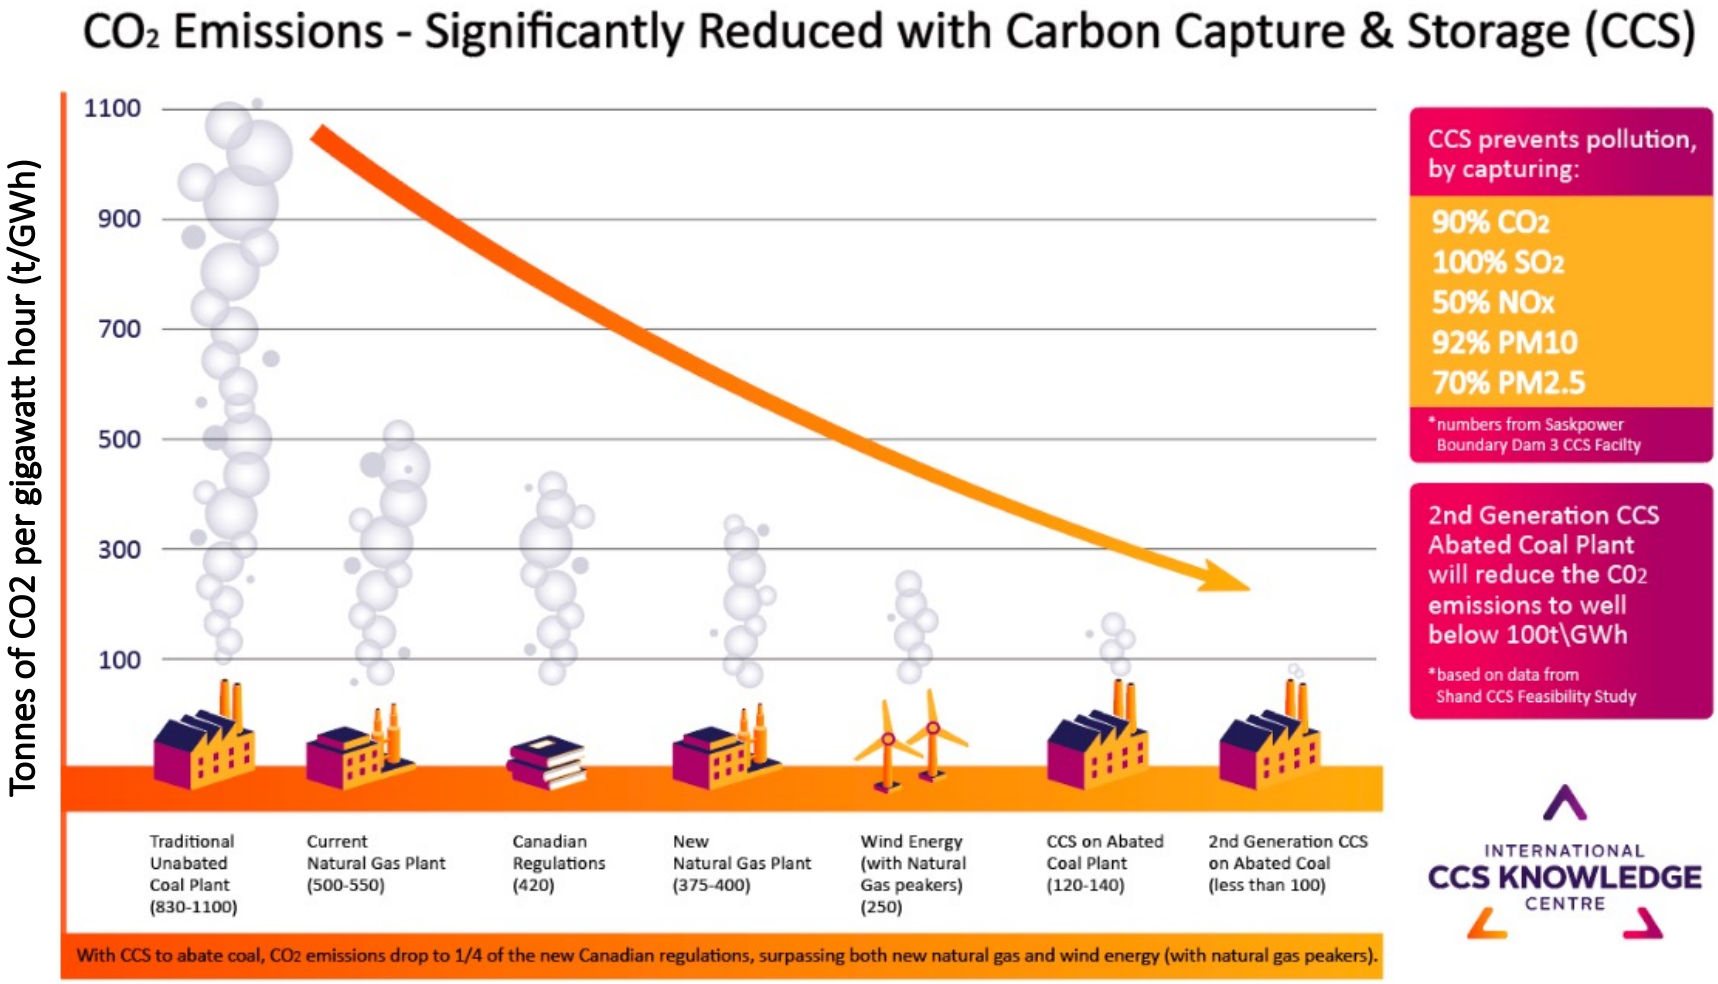

[1]Intergovernmental Panel on Climate Change, IPCC

Electricity Powers Progress: Community Benefits

- Affordable, reliable power essential to human well being
- Alaska Electricity costs are high, energy demand per capita is second-highest in the nation, and Alaska is home to some of the lowest income socioeconomic groups in USA
- With Alaska's Power Cost Equalization (PCE) Program, Investments lowering Railbelt energy cost also lowers power costs Statewide
  - PCE serves 82,000 Alaskans in 193 communities largely reliant on diesel fuel for power generation by lowering electricity cost to level comparable to Railbelt cost.
  - See article by the State Governor on the railbelt grid: https://gov.alaska.gov/state-labor-and-utilities-are-aligned-on-modernizing-the-railbelt-grid/
  - Alaska facts: https://www.eia.gov/state/print.php?sid=AK

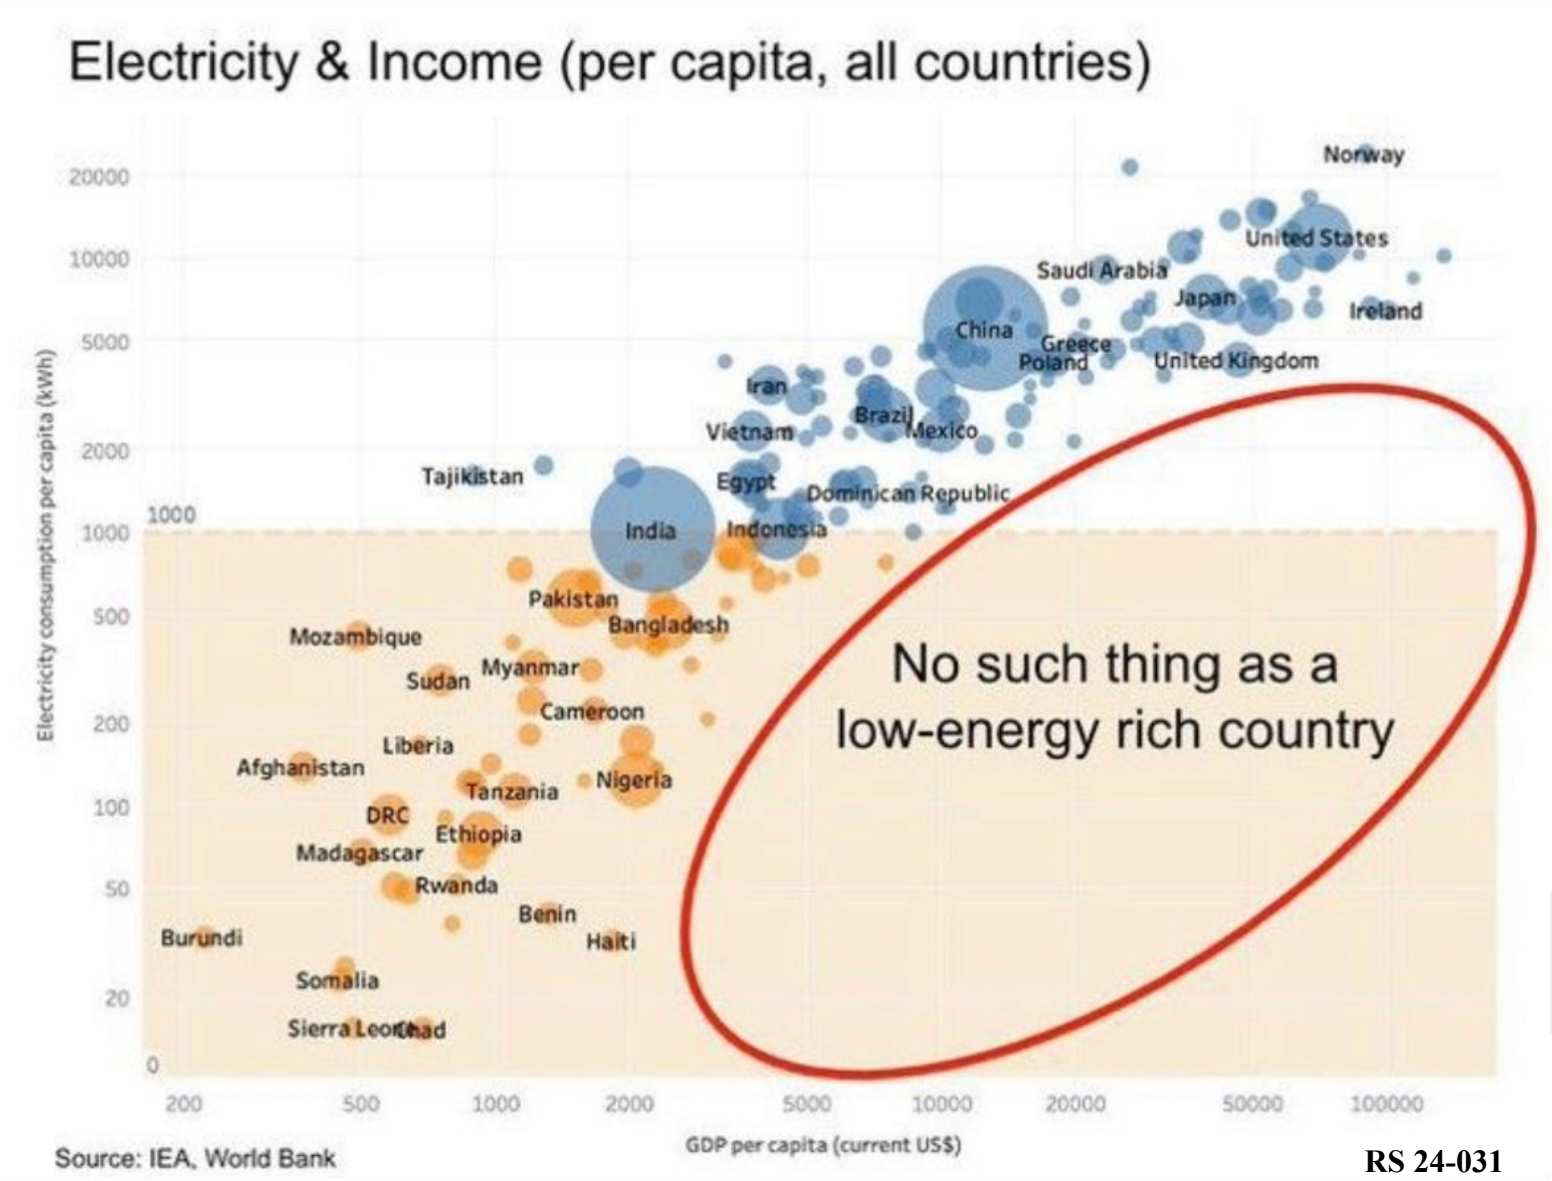

RS 24-031
IM 24-061

Carbon Storage Legislation

- Introduced January 2023 by the Governor
- Carbon Storage Bills moving through Legislative Committees
- In 2023, Legislature approved AOGCC to seek Class VI (CO_2 injection) well management primacy from the EPA

Status of Legislation

As-of Dec-2023

HB50

HRES
9 Hearings
Passed out of committee

HFIN
5 Hearings
Awaiting committee vote

SB49

SRES
5 Hearings
Awaiting committee vote

SFIN
Not yet scheduled

Continued Efforts

- AOGCC Class VI primacy
- Department of Revenue coordination
- Carbon storage lease agreements on other state-owned lands
- Advancing CCUS database focused on Cook Inlet

RS 24-031
IM 24-061

- Coal is lowest cost fuel
  - $4/MMBtu vs.
    $10 to $20+/MMBtu gas vs.
    $20 to $35/MMBtu diesel
  - Abundant coal supply
  - With CCS, coal emits:
    - ½ to ¼ of natural gas
    - ½ of wind supported with natural gas peaking plant
- Natural gas forecast from AEA, 2022, does not reflect price increase risk for imported LNG

Fuel Prices

Fuel prices trajectories were derived from projections by the Alaska Energy Authority (Figure 5).

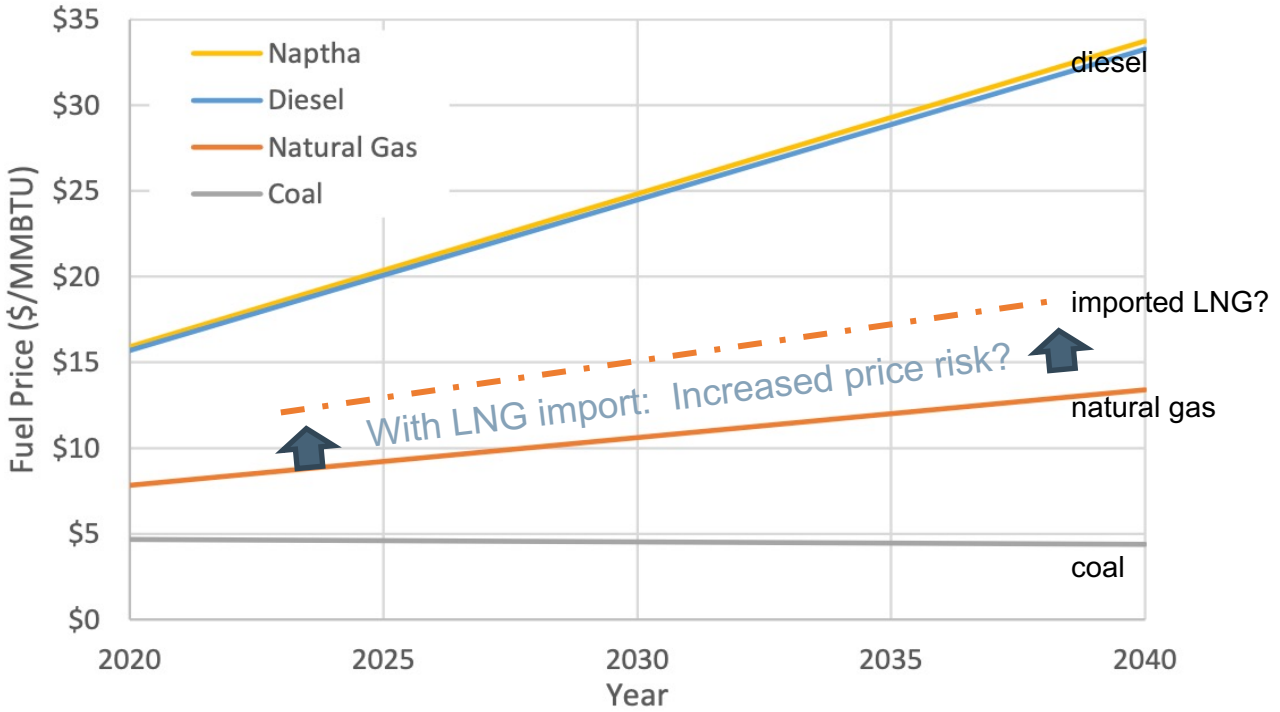

Figure 5. Assumed fuel price trajectories (2020$)

NREL Renewable Portfolio standard assessment for Alaska's Railbelt, 2022, NREL/TP-5700-81698. https://www.nrel.gov/docs/fy22osti/81698.pdf

Cost of Supply Comparison

Table 10. Natural Gas Supply Options (BRG) versus Biomass-Coal Power Generation

Options		Timeline from decision YE2024	Capital Investment	Cost of Supply: Fuel Price	Cost of Supply: Midstream Costs	Cost of Supply: Regasification Costs	Total Fuel (Electricity) Cost
		Years	$ mm	$/MMBtu	$/MMBtu	$/MMBtu	$/MMBtu ($/kWh)
FEC	**Biomass-Coal**	6 - 7	~$2,100 - $2,800	$3.5 - $4.0	$5.5 - $6.0	Included	**$9.0 - $10.0 ($.095 - $.106)**
1	Develop New Cook Inlet Gas Supply	3 - 4	up to $1500 - $2000	$9.3 - $25.5	Included	Included	**$9.3 - $25.5 ($.134 - $.283)**
2	In-State Bullet Pipeline from the North Slope	6 - 7	~ $8,790	$1.3 – $2.6	$26.8 – $34.2	Included	**$28.1 - $37.0 ($.307 - $.389)**
3	Kenai LNG	4 - 5	$768	$10.0 - $15.0	$3.4 - $4.7	$3.0 - $5.0	**$16.4 - $24.7 ($.199 - $.276)**
4	Greenfield LNG Port and Regasification	6 - 7	$876	$10.0 - $15.0	$4.0 - $5.3	$3.0 - $5.0	**$17.0 - $25.3 ($.205 - $.281)**
5	Floating Storage Regasify Unit (FSRU) - Own/Lease	4 - 6	$698	$10.0 - $15.0	$3.6 - $5.0	$3.0 - $5.0	**$16.6 - $25.0 ($.201 - $.278)**
6	Barge / Small LNG Carrier	4 - 5	$563	$10.0 - $15.0	$13 - $14	$3.0 - $5.0	**$26.0 - $34.0 ($.288 - $.361)**
1—6	**Natural Gas Supply Options Range Average,** Low–**Mid**–Max						$19 - **$24** - $29 **($.22 - $.27- $.32)**

Assumptions:

- Capital investment for natural gas supply options does not include power generation capex, includes transportation and processing only.
- Midstream for -biomass-coal includes power generation costs and for natural gas-fired power includes gas processing and transportation costs.
- Biomass-coal plant electricity costs are consistent with 200 to 400 MW plant capacity, aligned to anticipated Railbelt needs, and include plant capital investment, fixed and variable O&M, and fuel.
- Natural gas-fired power cost of supply based on BRG report.
- Natural gas-fired electricity cost is consistent with the methodology described in Table 2, except it includes only the Energy Charge and FPP, i.e., includes variable O&M and fuel. Capacity Charge was excluded in Table 10 for natural gas-fired power to emulate an avoided energy cost-type comparison using existing power generation capacity. If avoided capacity charges were included, it would significantly raise the natural gas-fired electricity cost.
- LNG landed import prices 2022-23 excluding regassification fees: $8.00-$41.00/MMBtu (US DOE FECM reports).
- per Berkeley Research Group (BRG), Alaska Utilities Working Group Phase 1 Assessment: Cook Inlet Gas Supply Project, https://www.enstarnaturalgas.com/wp-content/uploads/2023/06/CIGSP-Phase-I-Report-BRG-28June2023.pdf

ARCCS Project Study Basis

Assess CO_2 storage volumes using CarbonSAFE

- Beluga River Field alone has ~ 60+ years storage for 300 MW net with CCS (400 MW gross) biomass-coal power plant
- Consider aggregating CO2 from two power generation stations in Anchorage
- Plan with Operator simultaneous natural gas production and CO2 injection in depleted fields and Hemlock formation
- Acquire 2D Seismic over alternate saline aquifer
- Community Benefits Planning and Engagement
- Opportunity for agricultural use of CO2 and waste heat provides food and energy security and enables project to approach net-zero emissions
- UAF-led with EERC and ARI, with community support

Alaska Railbelt Carbon Capture and Storage (ARCCS) Project

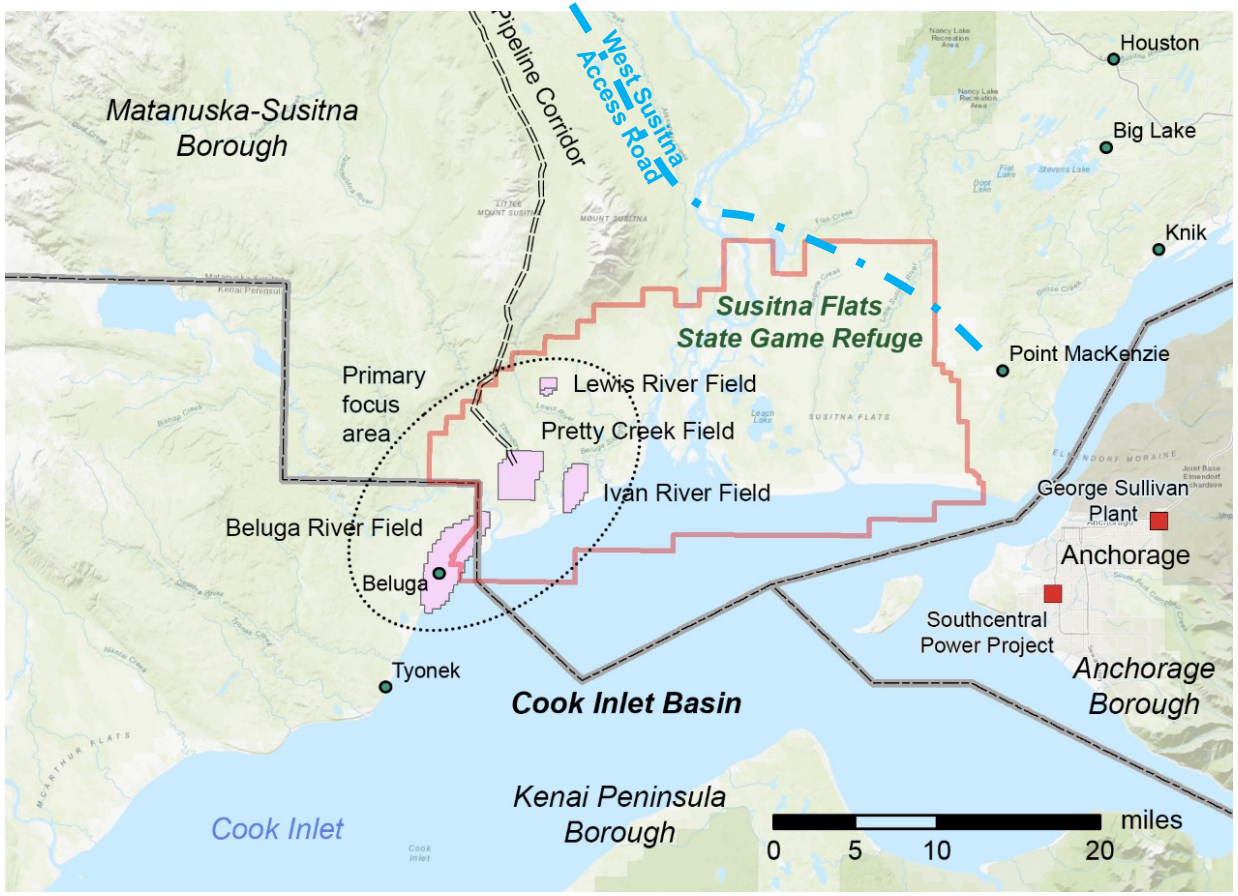

The ARCSS Project supports affordable, reliable, low carbon power generation with carbon capture and storage. The ARCSS Project is expected to lower power costs for Alaska's Railbelt and, through the Power Cost Equalization Program, also lower power costs to rural areas across the State.

Natural Gas vs. Biomass-Coal Fired Power

- Natural gas price risk a key driver for power cost, especially for future supply options
  - Future gas price range average per BRG, $24/MMBtu average for 6 options' prices
- Gas-fired power uses two price estimates:
  - Chugach Electric Assn's Generation & Transmission Rate (CEA G&T)
  - New high efficiency gas plant, 600 MW
- Biomass-Coal power cost is lower cost than Natural Gas
- Biomass-coal power cost is further reduced with CCS, as 45Q tax credit revenue, $85/t CO_2, exceeds CCS costs
  - Conversely, CCS on natural gas increases power cost slightly since CCS for natural gas is more expensive per tonne than 45Q credit

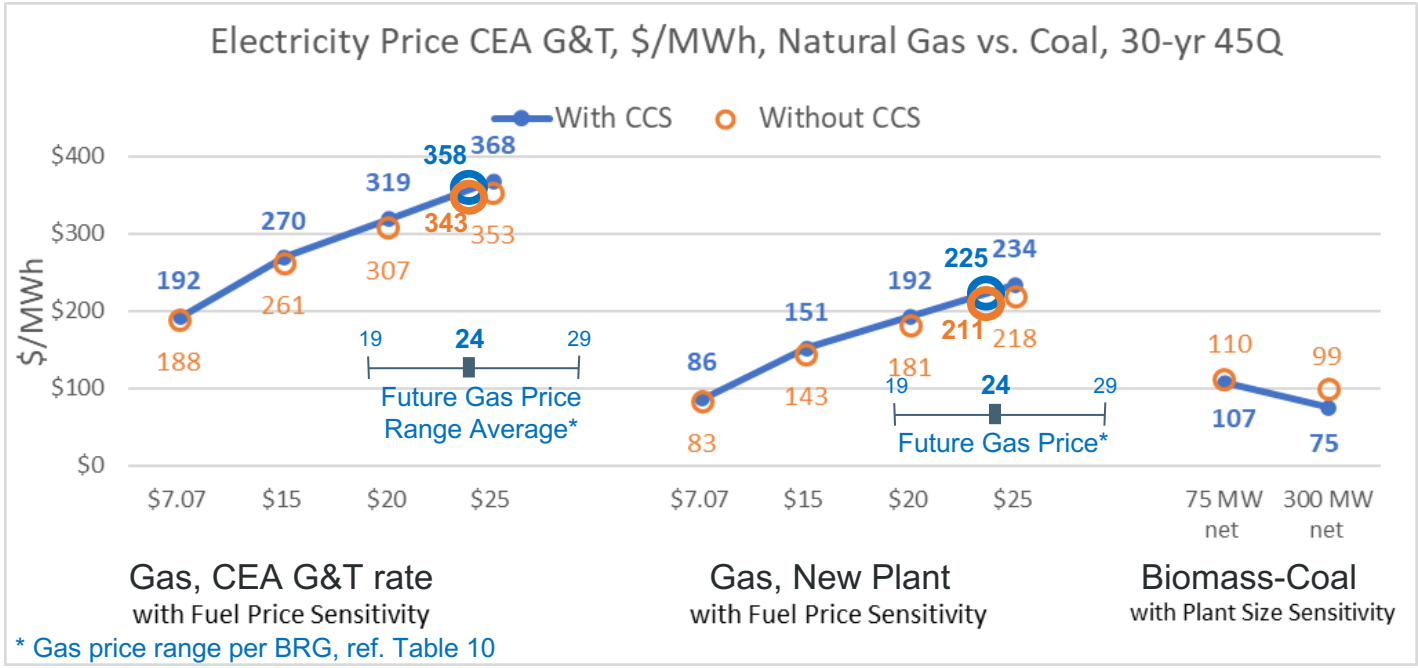

* Gas price range per BRG, ref. Table 10

- **Questions?**

- **Website: http://INE.UAF.EDU/Carbon**
- **Follow-up: CCUSAlaska@gmail.com**

Alaska CCUS Workgroup

- Alaska CCUS Workgroup meets monthly to quarterly, ~ 150 invitees, 40 to 50 typically attend in person or online
- UAF-INE, University of Alaska Fairbanks—Institute of Northern Engineering, has the lead role
- Leadership team includes Academia, Industry, and Government
- Funded by U.S. Dept. of Energy via PCOR, the Plains CO_2 Reduction Partnership, of University of North Dakota

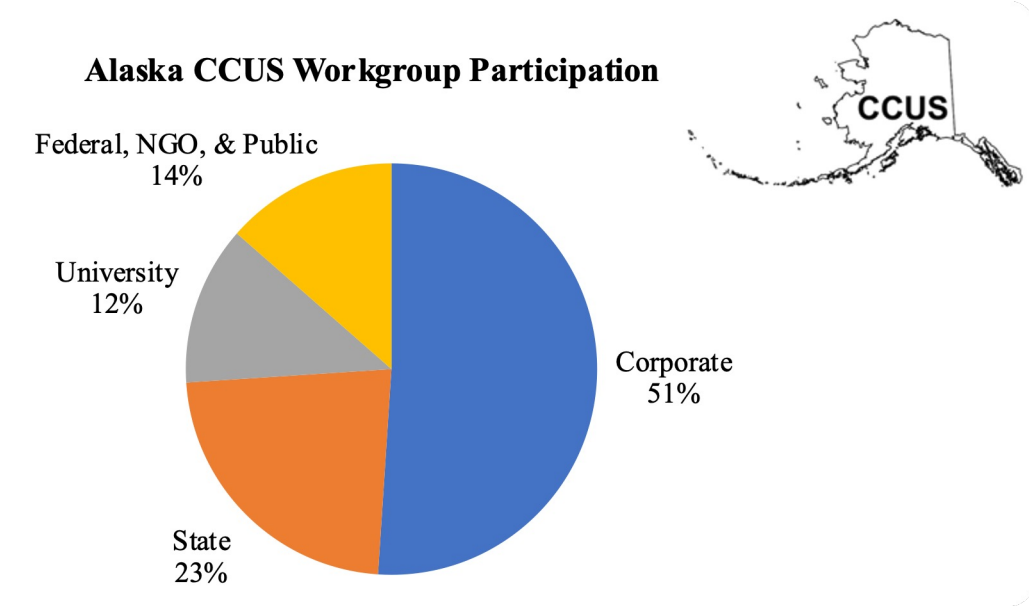

Subcommittee focus areas:

- Develop a State legal and regulatory framework
- Track and respond to funding opportunities
- Perform public education and outreach
- Develop a Roadmap to accelerate commercial CCUS

Why CCS?
Voluntary or Required CO_2 Emissions

- **Producers are electing to reduce Carbon Dioxide emissions, may be forced by regulations**
  - California, Oregon, and Washington have adopted their own clean fuel standards.
  - Washington, passed by the Legislature in 2021, requires fuel suppliers to reduce the carbon intensity of their products 20% below 2017 levels by 2038. (WA-GREET)
  - Carbon Capture and Storage, CCS, is one of the most cost-effective ways to reduce crude oil carbon intensity. CCS may enable Alaskan Crude to remain acceptable to the market.

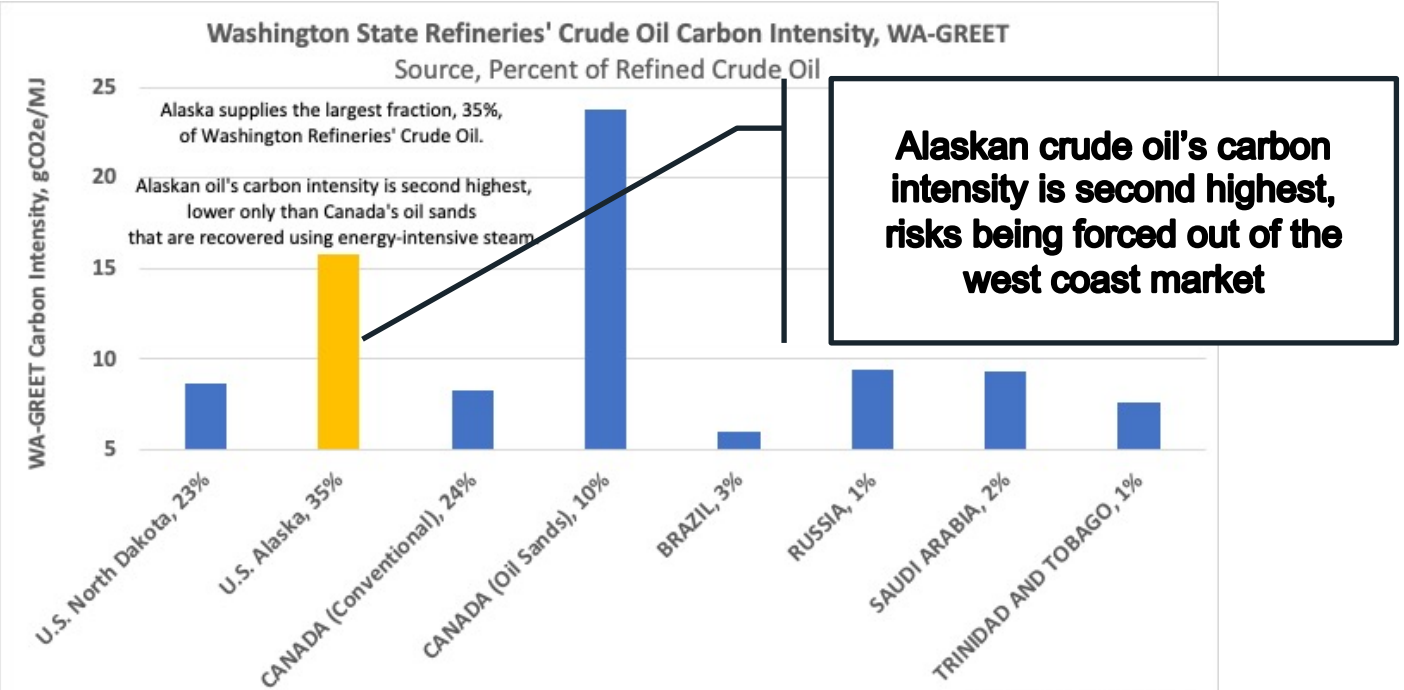

Source: WA-GREET 0.7a July 15, 2022 and Paskvan's Calculations.

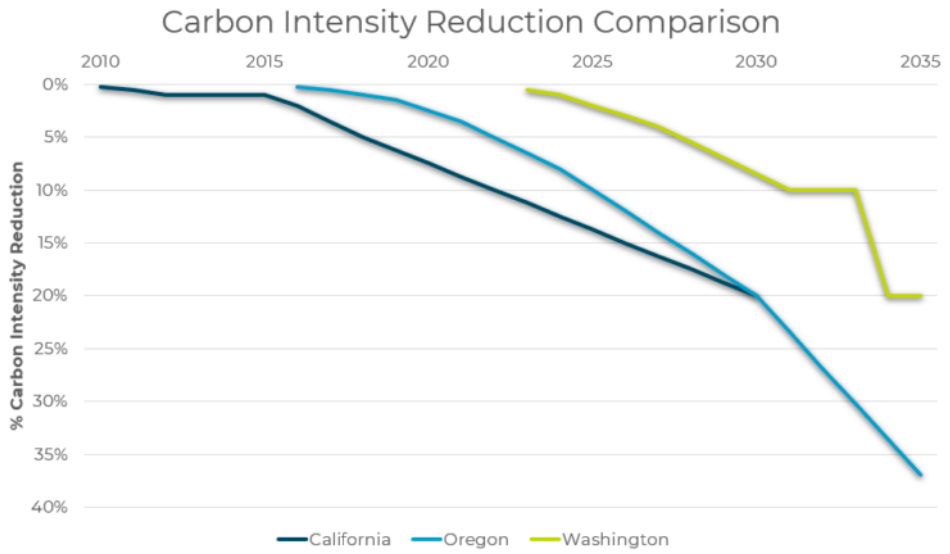

Source: https://www.usgain.com/resources/education-center/what-should-you-know-about-washingtons-clean-fuel-standard-cfs/

Alaska CO_2 Sources and Storage Potential

North Slope
* Natural gas fired
* Low cost natural gas
* O&G Subsurface data

Interior
* Coal fired
* Subsurface poorly understood, risk of faults breaching caprock

Southcentral
* Natural gas fired
* High cost, scarce natural gas
* O&G Subsurface data
* ARCSS Project proposed

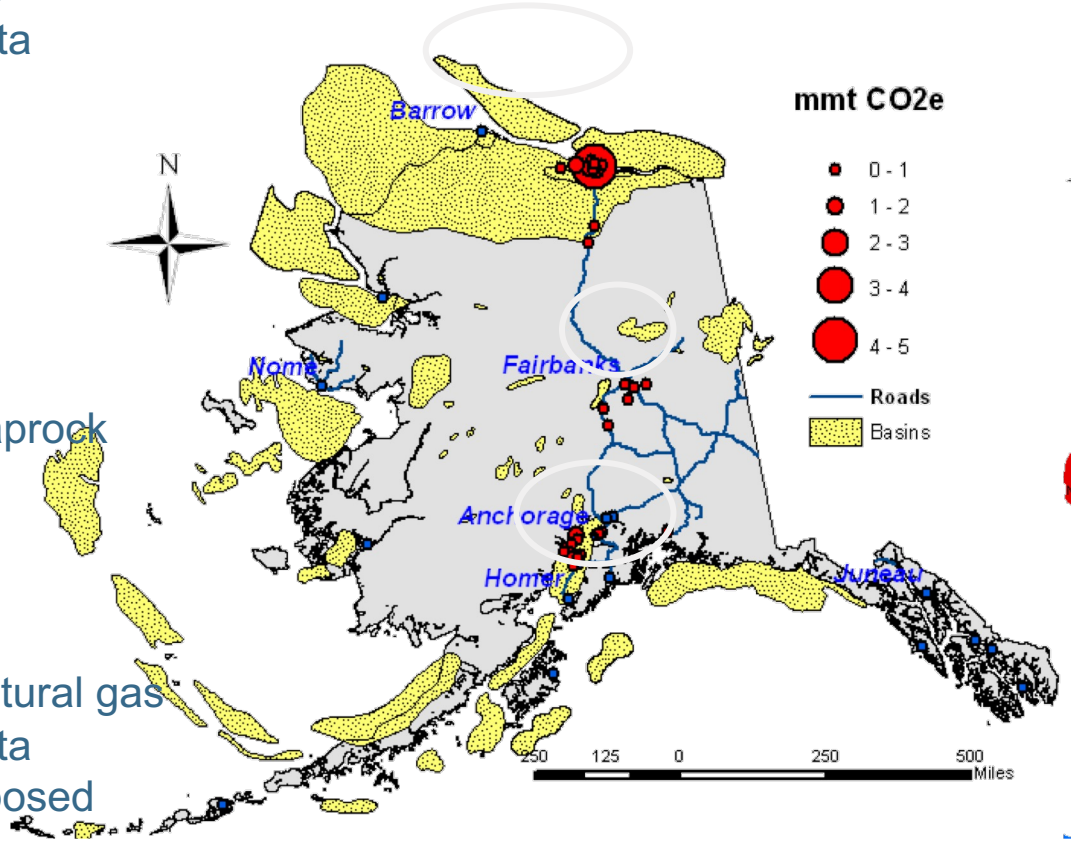

CO_2 Stationary Sources (red) & Deep Sedimentary Basins (yellow).

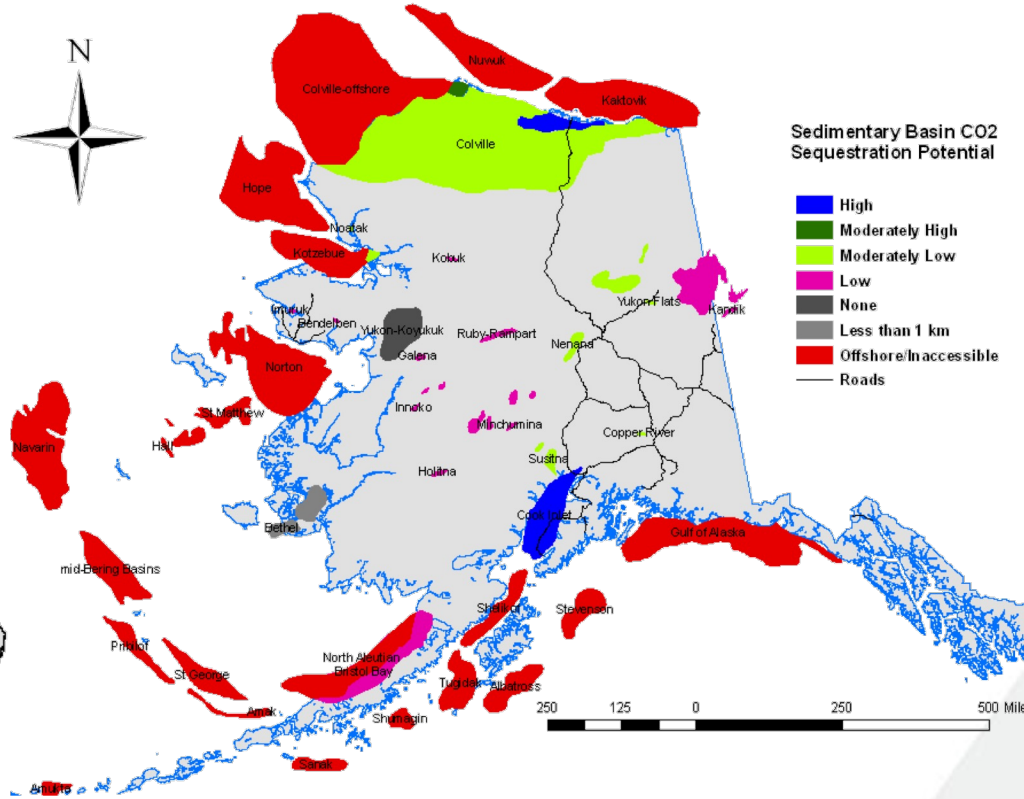

Sedimentary Basin Sequestration Potential (Shellenbaum and Clough, DNR, 2010)

CCUS Roadmap: Opportunities and Needs



Institute of Northern Engineering
University of Alaska Fairbanks

North Slope

Advantaged by low-cost natural gas

- Natural gas-fired capture
- Direct Air Capture (DAC)
- **Subsurface data integration & site-specific data gathering needed**
- 40 year track record of successful CO_2 storage and use, ~15 TCF
- Major Gas Sales 2015 LNG plan sequestered CO_2 back in reservoir

Interior

Existing coal plant infrastructure

- Coal-fired capture
- **Basic regional subsurface data gathering needed.**
- **Address geotechnical concerns**[1]

Southcentral

Proximity to Port, potential for import

- Capture not attractive at natural gas plants or refineries due to gas supply shortage & high price
- Coal or Hydrogen power with CCS can address natural gas shortage, food security, lower emissions
- Imported CO_2 storage (US West Coast or Asia-Pacific)
- **Subsurface data integration & site-specific data gathering needed**

[1] ***Open Link***: Seismic Hazard Considerations for Carbon Sequestration in Alaska

Alaska CCUS Opportunities: Capture Costs

- **Alaska Capture Screening**
  - Using typical Lower 48 costs
  - Fuel price a key cost driver[1]
  - $20 per tonne (maximum) for transport & storage
- **With Lower 48 costs and 45Q**
  - Natural gas capture attractive on North Slope
  - Natural gas capture less attractive for Southcentral
  - Coal capture looks attractive Statewide
- **Further work should be done for prospective projects**

Based on Table 1 in SPE paper 213051, Paskvan et. al.

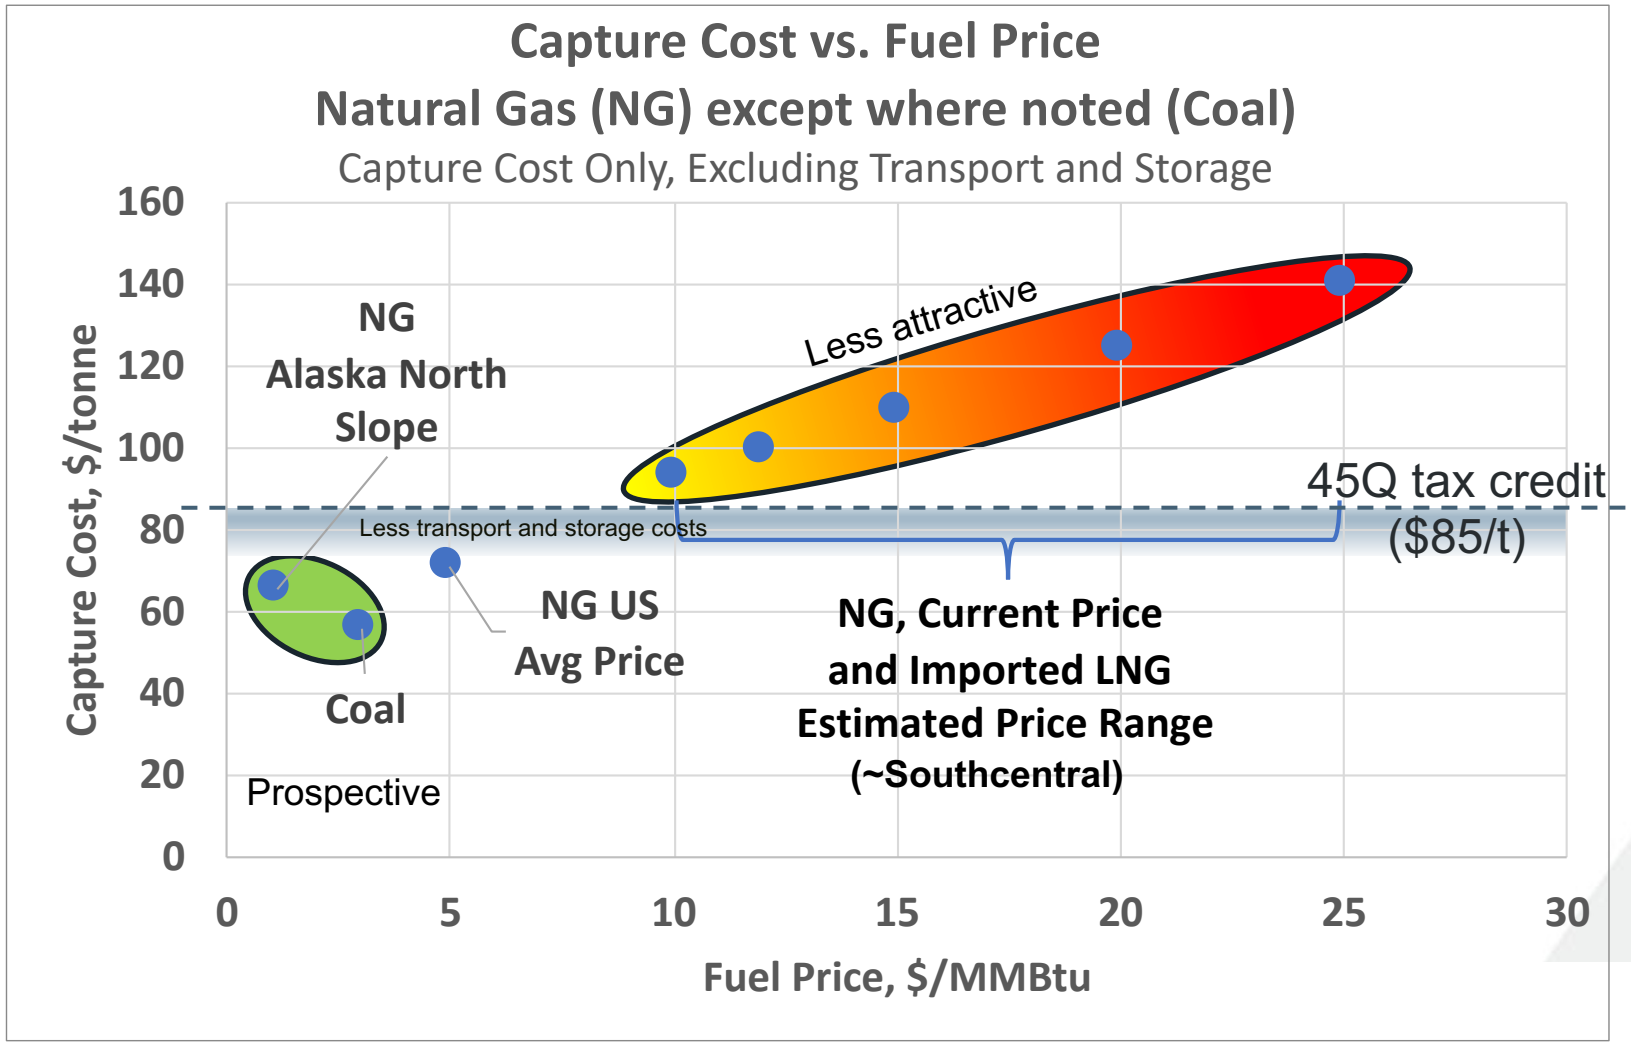

[1]Cost methodology benchmarked against NETL, U.S. Department of Energy National Energy Technology Laboratory, 2015,
"Cost and performance baseline for fossil energy plants volume 1a: Bituminous coal (PC) and natural gas to electricity" revision 3. July 6, 2015, DOE/NETL-2015/1723.

CCUS Technology Readiness

- Feasibility Study selected "Ready for Deployment"-level Technologies
  - Technology Readiness Level (TRL) 8 or 9:
    - Amine Absorption
    - Compression & Pipeline
    - Depleted gas fields (with Saline aquifer backup)
- Technology will continue to evolve toward lower cost and higher efficiency systems

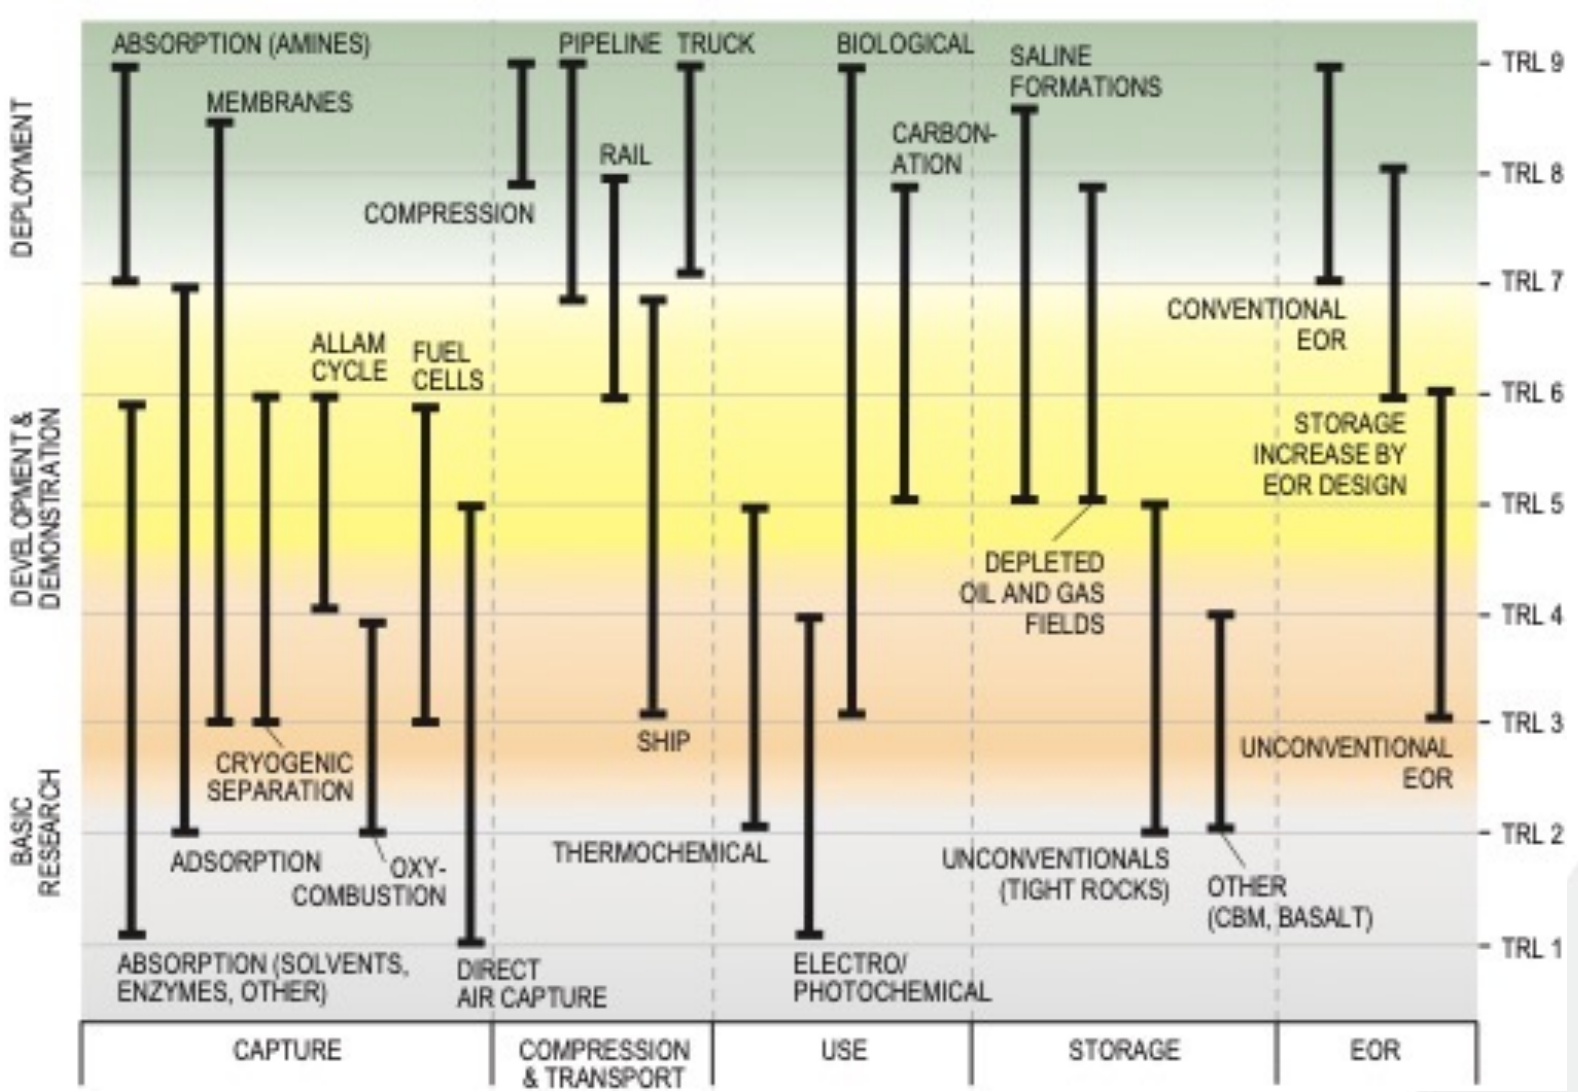

Source: NPC Roadmap, p. 32, 2019

Cost Estimates

Table 8. Combined Project Cost, Low Cardon Biomass-Coal Power Generation with CCS Assuming 30 Years of Operations

	Units	Power Plant with CCS	
Power Plant Generation Net with CCS	MW	75	300
Total Capital: Power Plant, CCS Plant, Pipeline, Well, Storage	Net present US$MM	**1149**	**3627**
Total Operating Capital Cost (30 years, 2.5% plant cost/yr)	Net present US$MM	464	1555
Total Expense Cost (30 years)	Net present US$MM	1657	6129
Power Plant Capital Cost (excluding power transmission)	Net Present US$MM	650	2229
Power Plant Ongoing CAPEX (30 years, 2.5% plant cost/yr)	Net present US$MM	319	1092
Power Plant OPEX (30 years)	Net present US$MM	1190	4567
Carbon Capture Plant Capital Cost	Net present US$MM	296	944
Carbon Capture Plant Ongoing CAPEX (30 years, 2.5% plant cost/yr)	Net present US$MM	145	463
Carbon Capture Plant OPEX (30 years)	Net present US$MM	389	1410
Pipeline Capital Cost	Net present US$MM	97	133
Pipeline OPEX (30 years)	Net present US$MM	17	17
Well Cost	Net present US$MM	45	186
Storage (monitoring, facility fees, inspection, and testing)	Net present US$MM	61	135

Feasibility Timeline

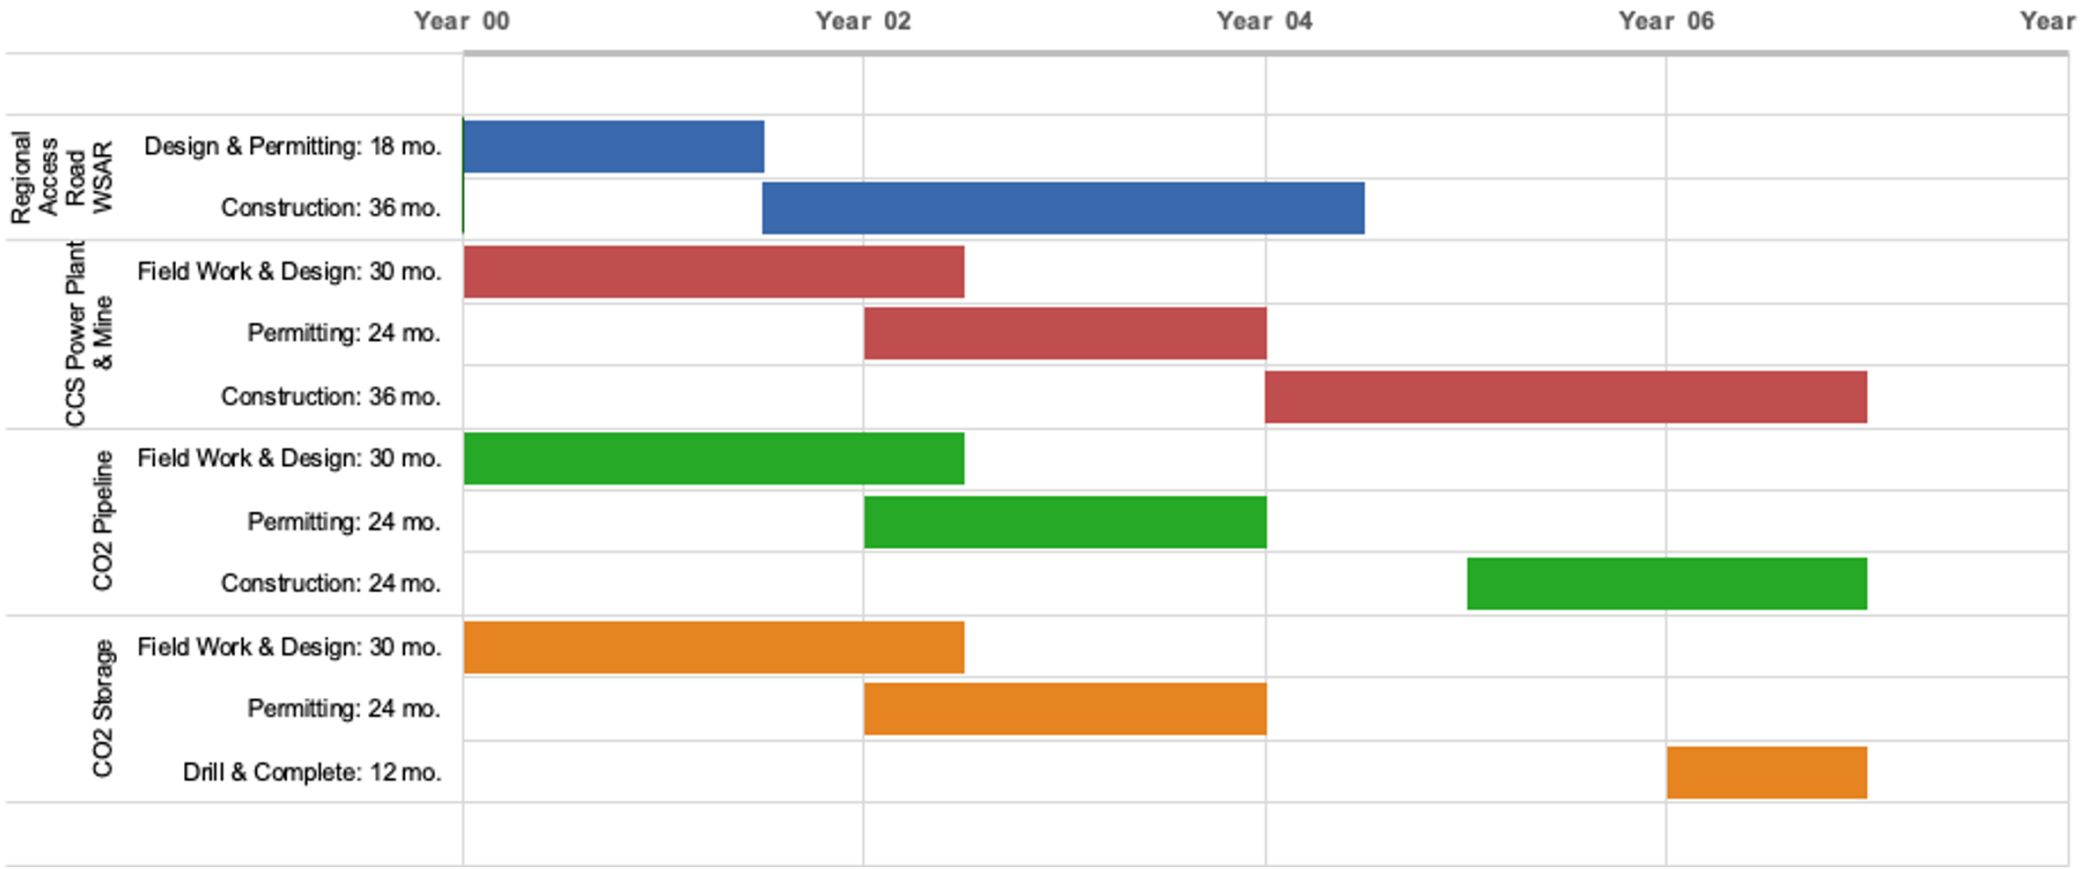

Figure 14. Project timeline (created with Vertex42 © 2017).

ARCCS Project Tasks (Alaska Railbelt Carbon Capture Storage)

- ARCCS Project
  - UAF leads with support from EERC and ARI and other project partners

- Project Tasks, AOI-4, CarbonSAFE Phase II:
  - Task 1.0 – Project Management and Planning
  - Task 2.0—Site Specific Characterization & Assessment of the CO_2 Storage Complex
  - Task 3.0—Preliminary Project Risk Assessment with Mitigation & Management Plans
  - Task 4.0—Plan for Subsequent Detailed Site Characterization & UIC Class VI Permitting
  - Task 5.0—Project Technical & Economic Feasibility Assessment, Including Conceptual-Level Design Study for CO_2 Transport
  - Task 6.0 – Community Benefits Plans (CBP)

ARCCS Project Support

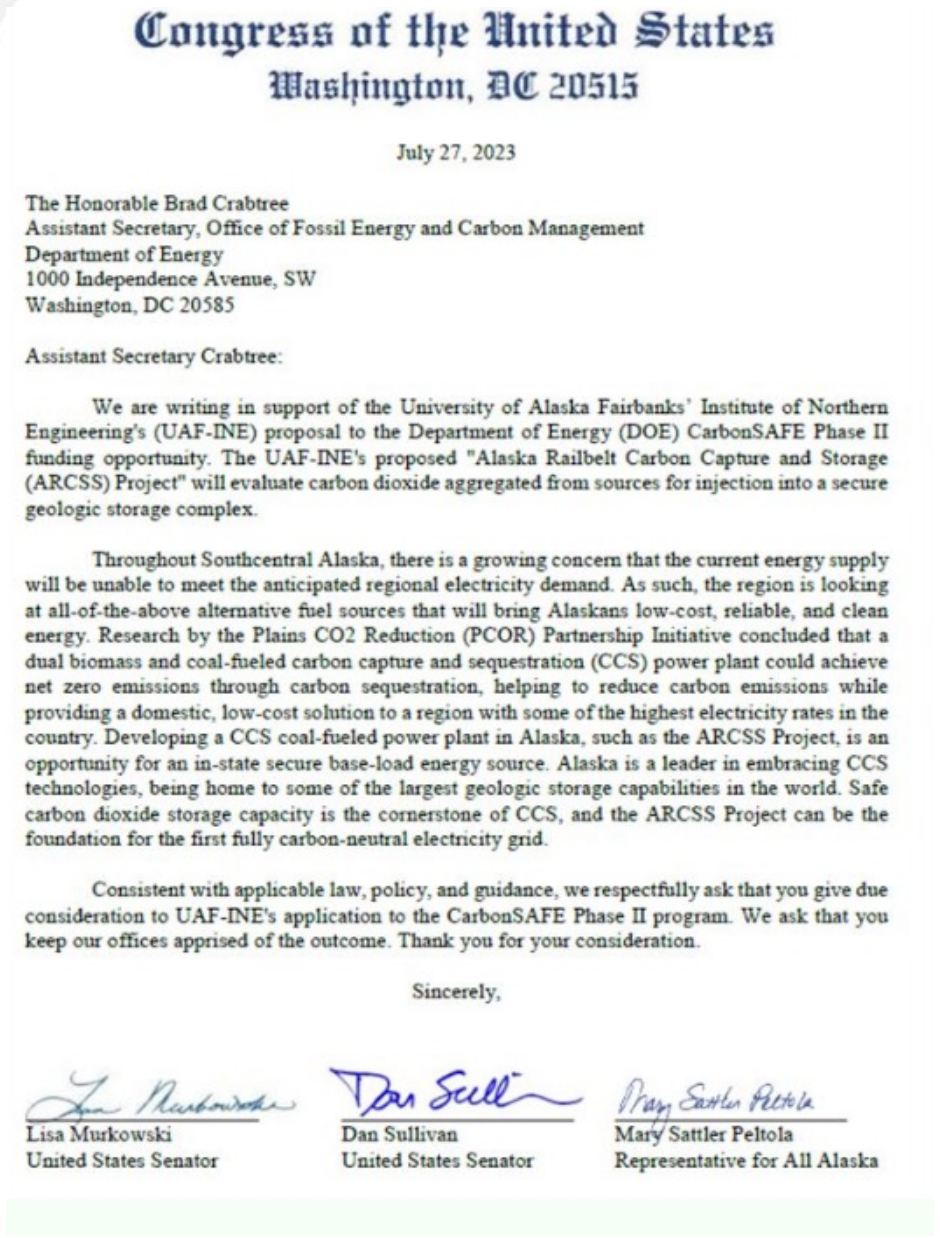

Congress of the United States
Washington, DC 20515

July 27, 2023

The Honorable Brad Crabtree
Assistant Secretary, Office of Fossil Energy and Carbon Management
Department of Energy
1000 Independence Avenue, SW
Washington, DC 20585

Assistant Secretary Crabtree:

We are writing in support of the University of Alaska Fairbanks' Institute of Northern Engineering's (UAF-INE) proposal to the Department of Energy (DOE) CarbonSAFE Phase II funding opportunity. The UAF-INE's proposed "Alaska Railbelt Carbon Capture and Storage (ARCSS) Project" will evaluate carbon dioxide aggregated from sources for injection into a secure geologic storage complex.

Throughout Southcentral Alaska, there is a growing concern that the current energy supply will be unable to meet the anticipated regional electricity demand. As such, the region is looking at all-of-the-above alternative fuel sources that will bring Alaskans low-cost, reliable, and clean energy. Research by the Plains CO2 Reduction (PCOR) Partnership Initiative concluded that a dual biomass and coal-fueled carbon capture and sequestration (CCS) power plant could achieve net zero emissions through carbon sequestration, helping to reduce carbon emissions while providing a domestic, low-cost solution to a region with some of the highest electricity rates in the country. Developing a CCS coal-fueled power plant in Alaska, such as the ARCSS Project, is an opportunity for an in-state secure base-load energy source. Alaska is a leader in embracing CCS technologies, being home to some of the largest geologic storage capabilities in the world. Safe carbon dioxide storage capacity is the cornerstone of CCS, and the ARCSS Project can be the foundation for the first fully carbon-neutral electricity grid.

Consistent with applicable law, policy, and guidance, we respectfully ask that you give due consideration to UAF-INE's application to the CarbonSAFE Phase II program. We ask that you keep our offices apprised of the outcome. Thank you for your consideration.

Sincerely,

Lisa Murkowski
United States Senator

Dan Sullivan
United States Senator

Mary Sattler Peltola
Representative for All Alaska

ARCCS Cost Share Commitments from:

- State of Alaska Office of the Governor
- Advanced Resources International
- Flatlands Energy Corporation
- State of Alaska Department of Natural Resources
  - Division of Oil and Gas
  - Division of Geological and Geophysical Surveys
- Friends of West Susitna
- blueprint Alaska

ARCCS Project Support Letters from:

- The Alaska Congressional Delegation
- Hilcorp Energy Corporation
- Chugach Electric Assn.
- Cook Inlet Region Inc.
- Matanuska Susitna Borough
- Alaska Native Science and Engineering Program
- Alaska Energy Authority
- Nova Minerals Ltd
- U.S. Gold Mining Inc.

Institute of Northern Engineering
University of Alaska Fairbanks

COOK INLET REGION LOW CARBON POWER GENERATION WITH CARBON CAPTURE, TRANSPORT, AND STORAGE FEASIBILITY STUDY

February 28, 2024

University of Alaska Fairbanks Institute of Northern Engineering

Energy & Environmental Research Center, University of North Dakota

PCO2R Partnership

Plains CO_2 Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

RS 24-031
IM 24-061

Institute of Northern Engineering
University of Alaska Fairbanks

COOK INLET REGION LOW CARBON POWER GENERATION WITH CARBON CAPTURE, TRANSPORT, AND STORAGE FEASIBILITY STUDY

Topical Report

Low Carbon Emissions and Economic Analysis: Biomass-Coal versus Natural Gas Generation – Alaska Railbelt Electricity Grid and New Industrial Demand

Cooperative Agreement No. DE-FE0031838

Prepared by:

Frank Paskvan, UAF-INE
Thomas P. McGuire, EERC
Joshua R. Strege, EERC
Randy Hobbs, Hobbs Industries, Inc.
Kalb Stevenson, Axiom Environmental, Inc.

Reviewed by:

Brent Sheets, UAF-INE
Kevin C. Connors, EERC
Wesley D. Peck, EERC

Institute of Northern Engineering (INE)
University of Alaska Fairbanks (UAF)0
PO Box 755910
Fairbanks, AK 99775-5910

Energy & Environmental Research Center (EERC)
University of North Dakota
15 North 23rd Street, Stop 9018
Grand Forks, ND 58202-9018

February 28, 2024

PCO2R Partnership
Plains CO_2 Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

RS 24-031
IM 24-061

SUGGESTED CITATION

Paskvan, F., McGuire, T., Strege, J., Hobbs, R., Stevenson, K, *Cook Inlet Region Low Carbon Power Generation with Carbon Capture, Transport, and Storage Feasibility Study*, UAF-INE, EERC PCOR, February 28, 2024.

EERC DISCLAIMER

LEGAL NOTICE This research report was prepared by the EERC, an agency of the University of North Dakota, as an account of work sponsored by the U.S. Department of Energy (DOE) and the North Dakota Industrial Commission (NDIC). Because of the research nature of the work performed, neither the EERC nor any of their employees make any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement or recommendation by the EERC.

Economic results were developed by UAF with guidance from EERC. Where reasonable, EERC models were used to validate key findings, but the EERC does not guarantee the accuracy of any economic findings reported herein.

ACKNOWLEDGMENT

This material is based upon work supported by DOE's National Energy Technology Laboratory under Award No. DE-FE0031838 and NDIC under Contract Nos. FY20-XCI-226 and G-050-96.

DOE DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government, nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

NDIC DISCLAIMER

This report was prepared by the EERC pursuant to an agreement partially funded by the Industrial Commission of North Dakota, and neither the EERC nor any of its subcontractors nor the North Dakota Industrial Commission nor any person acting on behalf of either:

(A) Makes any warranty or representation, express or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

(B) Assumes any liabilities with respect to the use of, or for damages resulting from the use of, any information, apparatus, method, or process disclosed in this report.

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement, recommendation, or favoring by the North Dakota Industrial Commission. The views and opinions of authors expressed herein do not necessarily state or reflect those of the North Dakota Industrial Commission.

UAF DISCLAIMER

LEGAL NOTICE This research report was prepared by the University of Alaska Fairbanks, as an account of work sponsored by the U.S. Department of Energy (DOE) and the North Dakota Industrial Commission (NDIC). Because of the research nature of the work performed, neither the UAF nor any of their employees or contractors make any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not necessarily constitute or imply its endorsement or recommendation by the UAF.

Economic results were developed by UAF with guidance from EERC. Where reasonable, EERC models were used to validate key findings, but neither UAF nor the EERC does not guarantee the accuracy of any economic findings reported herein.

TABLE OF CONTENTS

LIST OF FIGURES

LIST OF TABLES

ACRONYMS AND ABBREVIATIONS

AAC	Alaska Administrative Code
AC	alternating current
ADNR	Alaska Department of Natural Resources
AEA	Alaska Energy Authority
AGDC	Alaska Gasoline Development Corporation
AIDEA	Alaska Industrial Development and Export Authority
ANSI	American National Standards Institute
AOGCC	Alaska Oil and Gas Conservation Commission
AOR	area of review
Bcf	billion cubic feet
BIF	Best Interest Finding
CAPEX	capital expenditure
CarbonSAFE	Carbon Storage Assurance Facility Enterprise
CCS	carbon capture and storage
CCUS	carbon capture, utilization, and storage
CEA	Chugach Electric Association, Inc.
CFB	circulating fluidized bed
CFR	Code of Federal Regulations
CIRI	Cook Inlet Region, Inc.
CO_2	carbon dioxide
cP	centipoise
DAC	direct air capture
DOE	U.S. Department of Energy
DOG	Division of Oil and Gas
EERC	Energy & Environmental Research Center
EIA	U.S. Energy Information Administration
EOR	enhanced oil recovery
EPA	U.S. Environmental Protection Agency
FAST-41	Fixing America's Surface Transportation Act, Title 41
FEC	Flatlands Energy Corporation
FEED	front-end engineering design
FGC	flue gas cooler
FGD	flue gas desulfurization
FPP	fuel and purchased power
G&T	generation and transmission
GHGRP	Greenhouse Gas Reporting Program
GLO	Governor's Legislative Office
GVEA	Golden Valley Electric Association, Inc.
GWP	global warming potential
HEA	Homer Electric Association, Inc.
IEA	International Energy Agency
IRA	Inflation Reduction Act

Continued . . .

ACRONYMS AND ABBREVIATIONS (continued)

kg/m^3	kilogram per cubic meter
kWh	kilowatt-hour
lb	pound
lb/ft^3	pound per cubic foot
LNG	liquefied natural gas
mD	millidarcy
MEA	Matanuska Electric Association, Inc.
MHI	Mitsubishi Heavy Industries
MIT	mechanical integrity testing
MMBtu	million British thermal unit
MMscfd	million standard cubic feet per day
MRV	monitoring, reporting, and verification
MP	milepost
MMt	million metric tons
MW	Megawatt
MWe	Megawatts electric
MWh	megawatt-hour
NEPA	National Environmental Policy Act
NETL	National Energy Technology Laboratory
NGI	Natural Gas Intelligence
NIST	National Institute of Standards and Technology
O&M	operating and maintenance
OPEX	operating expenses
pc	pulverized coal
PCOR	Plains CO_2 Reduction (Partnership)
PISC	postinjection site care
POD	plan of development
PRA	Petrotechnical Resources of Alaska
psi	pound per square inch
R&D	research and development
ROD	record of decision
ROW	right of way
RRC	Railbelt Reliability Council
RTE	Red Trail Energy
Tcf	trillion cubic feet
T&S	transportation and storage
UAF	University of Alaska Fairbanks
UAF-INE	University of Alaska Fairbanks Institute of Northern Engineering
USDW	underground source of drinking water

COOK INLET REGION LOW CARBON POWER GENERATION WITH CARBON CAPTURE, TRANSPORT, AND STORAGE FEASIBILITY STUDY

EXECUTIVE SUMMARY

For approximately 70 years, Southcentral Alaska (Southcentral) has been dependent on natural gas produced and distributed from the Cook Inlet Basin for both direct heat use and electricity generation. Hilcorp Energy Company (Hilcorp) supplies approximately 85% of the natural gas to Southcentral utilities and in 2022 gave notice to utilities to consider alternative sources of energy because the depletion of Cook Inlet gas reserves prevents Hilcorp from renewing utility agreements beginning in 2025 (DeMarban, 2022). A dominant electricity producer in Southcentral, the Chugach Electric Association, Inc. (CEA), relies on gas for 80% of its electricity needs (Chugach Electric Association, 2022b). CEA states in its review of gas resources, "Absent sufficient production from the Cook Inlet, and with North Slope [gas] pipeline projects years away, the study concluded it may be necessary for Southcentral utilities to import either liquid or compressed natural gas to fill the gap" (Chugach Electric Association, 2022a). Imported liquefied natural gas (LNG) and other gas supply options including new Cook Inlet Gas or North Slope gas create significant fuel price risk and can substantially increase Southcentral electricity prices, already amongst the highest in the nation.

Biomass-Coal power generation with carbon capture and storage (CCS) presents a compelling alternative that can commence operation 6 and 8 years from start of a front-end engineering design (FEED) study. Beneficial use of both CO_2 and coal ash by-products from the power plant for agriculture, such as greenhouse growing or fertilizer production, and for other imported products such as cement, gypsum, and possibly critical minerals, can support the State's policy objectives of lessening "Alaska's dependence on external foods and supply chains" (DCCED, 2023). The State imports 95% of its food, 100% of its CO_2 supply, and the majority of its fertilizer.

Biomass-Coal power generation with CCS can also support the stated objectives of the Governor and of Alaska's Office of Energy Innovation in accessing a secure and diverse energy mix for safe, reliable, and affordable energy for Alaskans, and Alaska's desire for leadership in "both carbon capture, utilization, and storage and building the critical minerals of this state and nation" (Alaska Department of Natural Resources, 2022). The Governor's recent Administrative Order No. 340 places "policies that enable Alaska to capitalize on its vast energy potential in order to lower the cost of energy and enhance the stability of energy delivered to Alaskans" as the first listed purpose of the Office of Energy Innovation, and "development of a strong and responsible critical minerals mining program and investment in emerging energy technologies" as its fifth (State of Alaska and Office of the Governor, 2022). Low-cost electricity is a key enabler for establishing an Alaska-based critical minerals mining and refining industry.

In January 2024, the University of Alaska Fairbanks-Alaska Center for Energy and Power (ACEP) released a techno-economic report, *Alaska's Railbelt Electric System: Decarbonization Scenarios for 2050* (Cicilio 2024). That report found that "...the (Railbelt grid) system could not be decarbonized using only variable renewable resources, such as wind and solar power. Some

amount of firm source of generation is still required so that sufficient generation is always available. ...fossil-fuel and hydro power generation were the most cost effective firm sources to pair with variable renewables." (p.22) That report also concluded that nuclear and tidal generation were both more expensive, and that "there is also significant uncertainty in the projected costs and future commercial availability of these technologies." That report's base case economic analysis showed that wind, solar, nuclear, tidal, or hydro power, i.e., re-activating the Susitna-Watana Dam project, would be more expensive than business-as-usual power costs. By extension, those options would be considerably more expensive than a biomass-coal or biomass-coal with CCS energy supply, which generates lower cost power than the current power system.

Study Approach

This study evaluates the economic and technical feasibility of a low CO_2 emissions biomass-coal-fueled power plant and compares it to current and future natural gas generation scenarios. The cost of electricity generated from a new biomass-coal power plant, with and without CCS, is compared with the cost of electricity generated from natural gas power plants, existing or newly constructed, with and without CCS, at current and expected future natural gas fuel prices.

A circulating fluidized-bed (CFB) biomass-coal fired power plant and Mitsubishi Heavy Industries (MHI)-based carbon capture plant were selected for evaluation in this study. These systems have recently been installed in analogous commercial industrial plants and are well understood. Both plants will be co-located at the Flatlands Energy Corporation (FEC) coal lease in the West Susitna region of the Northern Cook Inlet of Alaska for this study.

The selected CO_2 storage site for this study is the nearly depleted Beluga River on-shore gas field. This reservoir is forecast to be depleted within 10 years and has well-understood geology and pore space estimated to store more than 60 years of CO_2 captured from a 400-megawatt electric (MWe) biomass-coal power plant. For this multi-zone gas field, the Operator Hilcorp indicates a depletion plan can be developed where CO_2 injection begins during field gas depletion. Further geological and engineering study is planned for this area to calculate CO_2 storage capacity, to be led by University of Alaska. This storage capacity study, the Alaska Railbelt Carbon Capture and Storage (ARCCS) Project, was selected by the U.S. Department of Energy for a Carbon SAFE Phase II storage volume analysis including technical, economic, and community assessments for potential CO_2 storage (U.S. DOE FECM Nov.14, 2023).

CCS techno-economic models assume that the carbon capture, transport, and storage facilities are operated for all 30 years of the electricity generation project lifespan in all cases. Base-case 45Q tax credit assumptions are that the tax credits remain at $85/metric tonne through the entire 30-year project life, referred to as the "30-year tax credit" scenario, which is consistent with the history of U. S. Federal legislative extensions for both wind and CCS tax credits to date. As an alternate case, CCS economics are tested with 45Q credits that end after 12 years, consistent with current legislation and referred to as the "12-year tax credit" scenario. No economic benefits from value-added products, such as critical minerals or CO_2 sales, are considered in the economics in this report.

In order to assess the cost competitiveness of electricity from biomass-coal, three approaches are used to estimate the cost of natural gas power at current and higher future natural gas prices. First, the industrial rate offered by CEA is referenced. (Note: industrial rates are cited throughout this report. Retail electricity is ~12% higher than industrial rates.) A second approach estimates the avoided cost of electricity from the existing CEA fleet, representing the average operational cost to generate a megawatt-hour of power. A final approach evaluates new high-efficiency gas power generation using the same method used to evaluate biomass-coal, which enables assessing the lowest hypothetical cost of gas-based power versus a new biomass-coal power investment.

Conclusions and Recommendations

Biomass-coal energy supply with CCS provides lower cost energy than natural gas energy supply with or without CCS, and biomass-coal energy supply with CCS provides lower CO_2 emissions than the current natural gas energy supply without CCS. Further, CCS lowers the cost of electricity for biomass-coal generation because 45Q tax credit revenues exceed CCS cost, while CCS for natural gas increases electricity cost due to Southcentral's high gas prices. As the imminent gas supply shortfall further increases natural gas prices, gas-based electricity, *with or without CCS*, is more expensive than biomass-coal-based electricity *with CCS*.

This economic and technical evaluation of biomass-coal power generation with CCS located in Southcentral Alaska provides an attractive business, technical, public policy, and environmental case for meeting long-term regional electricity supply needs. Anticipated biomass-coal-fueled electrical generation costs are competitive with the current rates and much lower than future power costs for generation relying on uncertain new Cook Inlet gas, imported LNG, or North Slope gas. Biomass-coal generation with CCS can economically deliver low carbon power. It may even be possible to attain climate positivity in an already highly efficient CFB power plant, for example, using waste heat and CO_2 for beneficial use in greenhouse operations while sequestering the remaining CO_2.

Biomass-coal power generation would lower CO_2 emissions, lower the cost of electricity to the Railbelt and Southcentral, and, through Power Cost Equalization, lower the cost of Rural electricity across the State, all while adding new power generation capacity and providing in-state-sourced fuel security.

Considering the imminent regional natural gas shortage, the resulting higher gas and electricity prices, the abundant low-cost coal reserves in the region, and the competitive power cost delivered with low to negative CO_2 emissions, it is recommended to progress a new biomass-coal fired power plant with CCS for the Railbelt and Southcentral.

Specific recommendations are included at the end of the report.

References

Alaska Department of Commerce, Community, and Economic Development, DCCED 2023, Alaska Food Security & Independence Task Force: www.commerce.alaska.gov/web/FoodSecurityTaskForce.aspx (accessed January 2023).

Chugach Electric Association, 2022a, Cook Inlet natural gas supply: www.chugachelectric.com/cook-inlet-natural-gas-supply (accessed October 2022).

Chugach Electric Association, 2022b, Strategic plan 2023–2027: www.chugachelectric.com/system/files/12-20-22%20Strategic%20Plan%20Final.pdf (accessed January 2023).

Cicilio, P. et al., Alaska's Railbelt Electric System: Decarbonization Scenarios for 2050, Alaska Center for Energy and Power, University of Alaska Fairbanks, January 2024, UAF/ACEP/TP-01-0003, DOI:10.5281/zenodo.10520544.

DeMarban, A., 2022, Hilcorp warns Alaska utilities about uncertain Cook Inlet natural gas supplies: Anchorage Daily News, May 17, 2022.

State of Alaska and Office of the Governor, 2022, Administrative Order No. 340: https://gov.alaska.gov/admin-orders/administrative-order-no-340/ (accessed January 2023).

Institute of Northern Engineering
University of Alaska Fairbanks

COOK INLET REGION LOW CARBON GENERATION WITH CARBON CAPTURE, TRANSPORT, AND STORAGE FEASIBILITY STUDY

INTRODUCTION

This study evaluates the technical and economic feasibility of constructing a greenfield power generation plant in northern Cook Inlet region, Alaska, with carbon capture, transport, and geologic storage of carbon dioxide (CO_2) in a soon to be depleted Cook Inlet natural gas reservoir. The power plant is assumed to be located at the mine mouth of the Flatlands Energy Corporation's (Flatlands Energy) coal lease near the Railbelt electricity grid and near prospective CO_2 storage sites.

The pending depletion of the natural gas supply for the largest segment of Alaska's population, the Southcentral Alaska (Southcentral) region, from the largest regional gas supplier, Hilcorp Energy Corporation (Hilcorp), requires the evaluation of known energy reserves that can come into production in a compatible time frame (DeMarban, 2022). Flatlands Energy's existing proven reserves of clean (low ash, metal, and mercury content and ultralow sulfur content) coal, when coupled with well-understood biomass-coal power generation technology with carbon capture, can contribute to meeting the electricity needs of the Alaska Railbelt within the necessary time frame. A new biomass-coal fired power plant can displace natural gas used for power generation, thereby extending the remaining life of the declining natural gas supply. In addition to diversifying power generation sources and providing firm power, modern coal plants can respond to the challenges introduced to the grid by variable power generation sources. Plant design concepts and costs used for this study are benchmarked with the 405 MW Dry Fork, Wyoming coal power plant, the recently installed 17-MW coal power plant constructed at the University of Alaska Fairbanks, and recently designed carbon capture plants elsewhere in North America.

In this feasibility study, proven project options and technologies were selected for planning and cost estimation purposes. Competing alternatives have not been eliminated and should be evaluated in future evaluations.

PCO2R Partnership
Plains CO_2 Reduction (PCOR) Partnership
Energy & Environmental Research Center (EERC)

RS 24-031
IM 24-061

Study Team: University of Alaska Fairbanks and the EERC

Under the Plains CO_2 Reduction (PCOR) Partnership program, engineers from the University of Alaska Fairbanks Institute of Northern Engineering (UAF-INE) and the Energy & Environmental Research Center (EERC) at the University of North Dakota collaborated with coal power generation and permitting specialists.

The PCOR Partnership, funded by the U.S. Department of Energy (DOE) National Energy Technology Laboratory (NETL), the North Dakota Industrial Commission's Oil and Gas Research Program and Lignite Research Program, and more than 230 public and private partners is accelerating the deployment of carbon capture, utilization, and storage (CCUS) technology.

The PCOR Partnership region comprises ten U.S. states and four Canadian provinces in the upper Great Plains and north western regions of North America, including Alaska. It is led by the EERC, with support from the University of Wyoming and the UAF-INE. The goal of this joint government–industry effort is to identify and address regional capture, transport, use, and storage challenges facing commercial deployment of CCUS throughout the PCOR Partnership region.

The PCOR Partnership region is home to abundant and diverse sources of anthropogenic CO_2 (e.g., coal and natural gas power plants, gas-processing plants, ethanol plants), fitting geology for CO_2 storage and utilization, a history of CO_2 transport and expanding pipeline infrastructure, and an established industrial/energy commercial base. For nearly two decades, working with over 250 industry and government partners, the focus of the PCOR Partnership has been the integration of CCS/CCUS into commercial industries within the region. The PCOR Partnership partners include key industrial sectors with a stake in CCS/CCUS deployment; numerous state, regional, and federal governmental research entities; and several state and federal regulatory agencies.

The EERC has provided technical support for multiple CCUS injection project applications. For example, the EERC partnered with Red Trail Energy LLC (RTE) to pursue the first carbon storage facility permit approval in North Dakota, which occurred at RTE's ethanol production facility. Regulatory, subsurface engineering, and geologic experts oversaw the drilling of a stratigraphic test well with coring, logging, formation testing and downhole fluid sampling to characterize the storage complex and confirm the geologic suitability for storing CO_2 at RTE. EERC reservoir engineers used the characterized data from well drilling and a 3D seismic survey to build a geologic model of the storage complex in order to run numeric simulations that would be used to predict the expected CO_2 plume extent for the volumes of CO_2 captured at RTE's facility. The EERC in collaboration with RTE developed a site monitoring, reporting, and verification (MRV) plan compliant with both state and federal requirements, including the U.S. Environmental Protection Agency (EPA) Greenhouse Gas Reporting Program (GHGRP) MRV Plan, required to meet eligibility for the 45Q tax credit. EERC experts subsequently testified before regulatory authorities as to the high degree of geologic security and permanence at the site, and ultimately, RTE gained approval for injection and storage shortly thereafter.

For Project Tundra, the EERC installed a slipstream carbon capture system at the Milton R. Young power plant to demonstrate a proof of concept using two different commercial solvent options for actual plant flue gas. Subsurface engineering and geologic experts supported drilling, logging, coring, formation testing, sampling, completion, and injection testing of three stratigraphic test wells over two phases of the Carbon Storage Assurance Facility Enterprise (CarbonSAFE) programs prior to pursuing site storage facility permits. They also conducted geologic modeling and fluid flow simulations to predict CO_2 plume growth during injection and stabilization during the postinjection period. Successful application for Project Tundra storage facility permits also required EERC regulatory groups to develop an adequate storage facility MRV plan to ensure safe and secure geologic CO_2 storage and provide risk analysis and remedial response plans for those risks among other long-term regulatory, legal, and operational planning. Upon completion of the storage facility permit applications, EERC staff again successfully testified that the site was safe and secure for CO_2 injection and storage, gaining storage approval shortly after RTE's storage facility permit approval.

Carbon Capture, Use, and Storage Technology Overview

Figure 1 shows a generalized schematic of CCS/CCUS. The CO_2 source in this feasibility study is combustion flue gas from a new biomass-coal fired power generation plant containing 11% to 14% CO_2 concentration by volume.

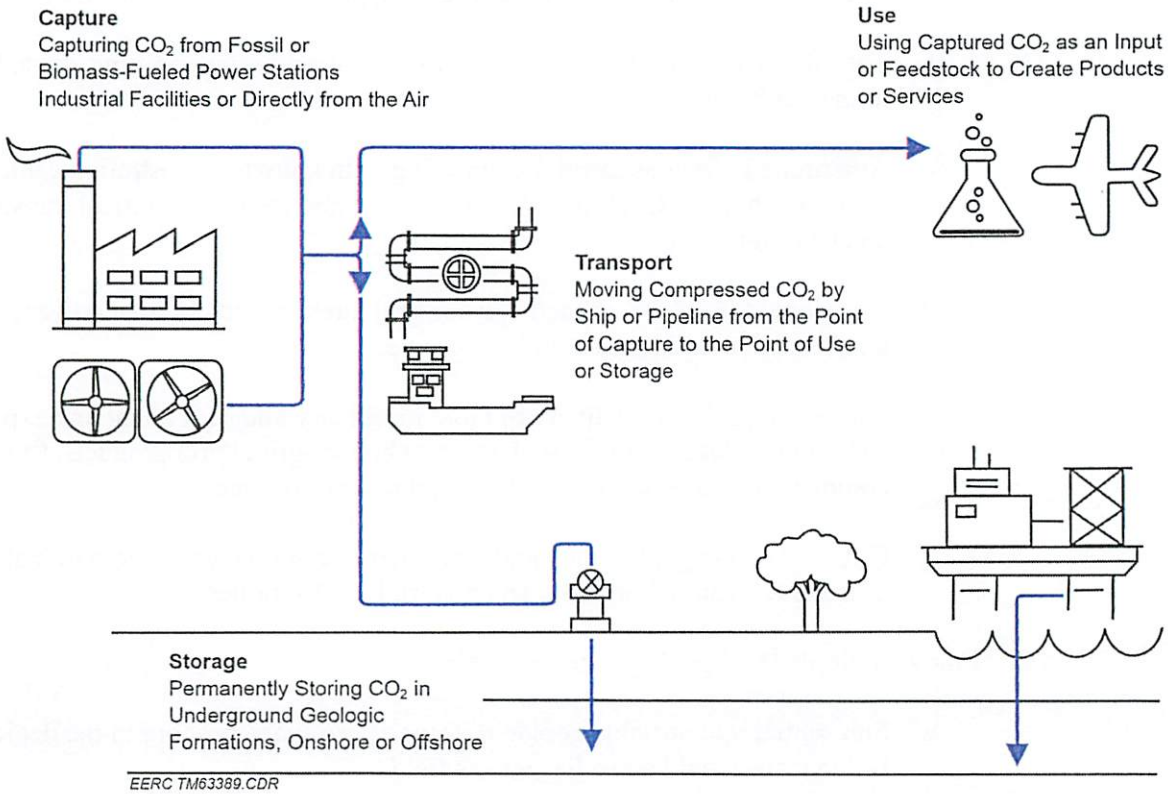

Figure 1. Generalized CCUS Schematic (International Energy Agency, 2022a).

With current carbon capture, 90% or more of coal power plant carbon emissions can be removed via amine-based solvent systems, resulting in lower CO_2 emissions than existing or new natural gas power plants without CCS. Most CCS projects compress CO_2 for increased density and lower volume and cost of transportation via pipeline to dedicated underground geologic storage in saline aquifers. Valuable by-product sales are also possible, including CO_2 for enhanced oil recovery (EOR), fly ash to the concrete market, critical minerals, or other products such as gypsum or sodium bicarbonate, allowing some coal plants with CCS and beneficial use to approach net-zero carbon emissions (International CCS Knowledge Centre, 2018).

Mine and Power Plant Location, Local Infrastructure, and Storage Potential

The Flatlands Energy coal reserve has sufficient proven reserves to supply electricity to prospective local industrial customers and the regional power utility grid for generations. This feasibility study considers electrical power generation with CCS from 25 to 500 MW (net) for local and regional power. Located in the northern Cook Inlet region, the Flatlands Energy coal lease is in an advantageous development location. A regional location map is shown in Figure 2. The lease:

1. Can access significant local and regional infrastructure:
    a. The existing West Susitna winter road, supporting development and construction.
    b. The all-season West Susitna Access Road, currently in permitting stage, for long-term operations.
    c. A permitted pipeline corridor connecting with known sequestration geology on the north shore of Cook Inlet which may be amended for electrical transmission and CO_2 transport.
    d. A regional 500+ MW-capacity power grid intertie at the Beluga power plant, or at an alternative tie-in near Port MacKenzie.
    e. Port MacKenzie, for delivery of large machinery and equipment and export of CO_2 value-added products such as greenhouse agricultural products, CO_2 for commercial use, ammonia, hydrogen, and other products.
    f. City of Anchorage, Southcentral, and Interior regions, with international airports, a strong relevant labor force, and materials and supplies.
2. Enjoys multiple local geologic storage options:
    a. Substantial, quantifiable geologic storage pore space onshore in the depleting Beluga River field and adjacent gas fields
    b. Potential saline aquifer storage space as close as 20 miles to Flatlands Energy site.

c. With additional nearby Northern Cook Inlet storage options including i) depleting or depleted oil or gas field nearby, ii) local or regional saline aquifer, e.g., the Hemlock Formation (Pantaleone and Bhattacharya, 2020) or iii) in local or regional unmineable coal seams (Shellenbaum and Clough, 2010) if other storage proves insufficient.

3. Can serve multiple new local and regional industrial customer/power demand, including the approved Donlin Gold mine (requiring ~200 MW) and other prospective mine developments underway nearby and enable the first low carbon to carbon neutral mining district in the world.

For this feasibility study, the selected electricity generation plant site is a mine-mouth power plant co-located at the Flatlands Energy coal lease, which is well-located for projected Railbelt growing power generation needs. Other locations can be considered in the future, but sites farther from the proposed mine site face longer, costlier coal truck haul, increased emissions related to the coal transport to the power plant, and possible combustion ash by-product backhaul to the mine site for disposal. Other considerations, such as location of greenhouse agricultural operations, may be considered in detail during future engineering and project optimization.

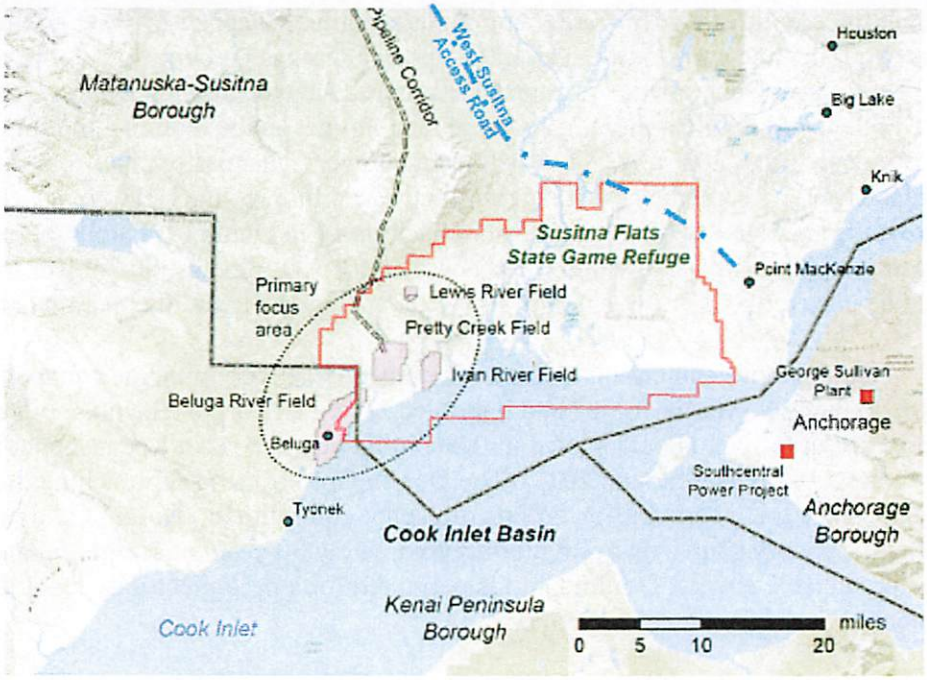

Figure 2. Northern Cook Inlet and Alaska Railbelt Carbon Capture and Storage (ARCCS) Map.

A geological and engineering study will calculate the CO_2 storage capacity in this region, the Alaska Railbelt Carbon Capture and Storage (ARCCS) Project by the University of Alaska awarded as DE-FE32453 (ref. Fig. 2). ARCCS was selected by the U.S. Department of Energy for a Carbon SAFE Phase II storage volume analysis including technical, economic, and community assessment for potential CO_2 storage (US DOE FECM press release, Nov. 14, 2023) "University of Alaska researchers plan to explore the viability of a new [biomass-]coal plant in

the Susitna River valley that would inject its carbon emissions underground." (Northern Journal, Dec 2023).

Selected Storage Site, Grid Intertie, Transportation Route

For electricity intertie and CO_2 storage, the Beluga gas-fired power plant and on-shore Beluga River gas field were selected. The Beluga power plant is nearing the end of its service life and has an associated regional power grid intertie with 500- to 600-MW capacity that would allow the new proposed biomass-coal fired power plant to tie into the regional Railbelt grid. The Beluga River gas field has operated for five decades and has less than 10 years of remaining economical life (Stokes, 2017, and personal communication, Petrotechnical Resources of Alaska [PRA] staff). The operating and geologic technical data associated with the gas field were reviewed to assess pore space availability and economics. Viable CO_2 storage exists to support more than 60 years of CO_2 capture from a 300-MW-net plant with CCS.

The power and carbon capture plant site are planned to be located at the mine site. Road access to the site will be provided during construction by a winter access road and during operation by the proposed West Susitna Access Road. A 75-mile route (including an extra 5 miles for contingency) for CO_2 and electricity transportation runs 2 miles from the proposed plant to the permitted Donlin Gold natural gas pipeline Milepost (MP) 60, to the Beluga River power and pipeline corridor, then along the power and gas pipeline corridor to the Beluga River site. The Alaska Department of Natural Resources (ADNR) granted Donlin Gold the right to lease State land to build a pipeline to supply natural gas to the Donlin Gold mine to power its operations (KTOO, 2021). A CO_2 pipeline and power transmission line from the plant site to the Beluga River site could be co-located within the Donlin pipeline right of way (ROW) through approval from ADNR with a letter of nonobjection from Donlin. If Donlin objected to this infrastructure being placed within its ROW, then the CO_2 pipeline and power transmission line could be placed outside of the Donlin ROW in an abutting ROW that parallels Donlin's ROW.

Donlin Gold's intention to build a natural gas delivery pipeline connecting Cook Inlet gas supply to the mine was proposed and approved before Hilcorp's recent announcement that Cook Inlet gas reserves would be depleted in the coming years (Alaska Department of Natural Resources, 2022b; DeMarban, 2022). The Donlin Gold Mine is approaching the final investment decision stage for several billion dollars of capital commitment. Donlin Gold must now find an alternative energy source that provides approximately 30 years of secure, reliable, affordable, price-predictable energy. Donlin Gold is permitted for a peak electricity load of 180 MW, and is a potential industrial power consumer.

Generation Plant and Carbon Capture Technology Production Scenarios

The proposed new biomass-coal fired power plant at the Flatlands Energy coal lease would use circulating fluidized-bed (CFB) technology to generate electric power, similar to the recently completed power plant at UAF (Babcock & Wilcox, 2020). CFB technology generally allows for up to 30% biomass as fuel, though in this study 10% or lower biomass fuel is evaluated. For this study, plant power generation sizes were evaluated from 25- to 500-MW electricity. Gross electrical plant output includes power consumption associated with the carbon

capture and transmission plant. Depending on the final power plant and CO_2 capture plant designs, operating conditions, and other factors, the CO_2 capture rate may be as high as 95% or more. The values in initial assessment will be refined during a future FEED (front-end engineering design) study. The power plant values include debt-financed CAPEX, no debt for OPEX, and exclude profit margins, tariffs, and other expenses. The accompanying CO_2 capture plant values include debt-financed CAPEX, debt-financed OPEX, and includes cost estimates for injection wells and pipeline construction. The CO_2 capture process selected for this feasibility study employs the proven Mitsubishi Heavy Industries (MHI) process.

Excluded Costs, Tax Structures, Grant Opportunities, and Loan Programs

The West Susitna Access Road is assumed to be funded by DOT and/or AIDEA in which case a toll may be charged for road use. This has yet to be determined. The existing winter road can be maintained and operated for a small annual cost. A short project access road which connects the West Susitna Access Road and winter road to the power plant site will need to be selected and costed.

The transmission construction cost of connecting from the power plant site to the Railbelt grid may be a grid cost or may be attributed to the power plant. Significant government funding may be available for new transmission lines that improve grid security and deliver low carbon power. This needs to be further evaluated and has not been included at this stage of study.

Transmission construction costs for industrial power supply are fully borne by the industrial project owners who pay for their transmission connection, e.g., the mine operator.

Beyond 45Q tax credits, additional Federal incentives, loans, and grants exist that, depending upon how the project is structured and operated, may apply but have not been included in this study.

COAL RESERVE LOCATION AND REGIONAL ELECTRIC GRID PROXIMITY

Location

The Flatlands Energy site contains an independently verified coal reserve. It is located on the lower east flank of Mount Dickason in the West Susitna Mining District in Southcentral Alaska. A regional location map is shown in Figure 2. The coal reserve is approximately 18 miles west-southwest of Skwentna which has a maintained airstrip to enable timely year-round site access. A winter road travels from Highway 3 west through Skwentna and onward to the Whisky Bravo airstrip, which supports the gold-critical minerals and gold–copper exploration operations of Nova Minerals and US GoldMining. The winter road passes within a few miles of the Flatlands Energy coal lease boundary. The lease is 67 miles northwest of Anchorage.

A multiuser all season resource road known as the West Susitna Access Road is in the construction approval process. The route will connect the existing road system near Port MacKenzie to the Whisky Bravo airstrip and pass within a few miles of the Flatlands Energy

reserve. The route is proposed by the State, is exclusively on State land, and is anticipated to be approved in 2025. There are no native land claims.

The topography where the reserve is located is considered moderate at an approximate elevation of 1200 to 1600 ft above sea level. The area is covered with mixed shrubs and tundra. The area experiences cool summers and moderately cold winters, which are ideal year-round conditions for generating station operations.

Development History

Mobil Mineral and Coal Company, a division of Mobil Oil Company (Mobil), controlled the coal lease and undertook exploration mapping and drilling between 1972 and 1982. Mobil closed its Mineral and Coal division in the 1980s and merged with Exxon Oil Company (now ExxonMobil). Mobil returned the coal lease to the State of Alaska.

In 2012, Alaska Department of Natural Resources (ADNR) initiated a process to auction the historic coal lease. The lease carries with it a right to the coal contained in the lease lands for an unlimited term. A 2-year regulatory process, called the Best Interest Finding (BIF), was initiated. The BIF involved broad State regulatory review and comment as well as multiple rounds of community and municipal consultation.

The Final BIF Decision, recorded July 5, 2013, is a regulatory decision of ADNR, which found that use of the lease for coal mine development is in the best interest of the State. ADNR concluded that the potential environmental effects of coal mining can be largely avoided or mitigated.

In 2015, Flatlands Energy Corporation successfully bid into the State lease auction. Flatlands Energy subsequently performed its own drill program and data collection, and has been undertaking wetland, fish survey, water, air, and biota field evaluations. Since 2018 work along these lines has continued to progress toward the next stages of the project.

Coal Properties and Extraction

Coal in the Flatlands Energy reserve has properties comparable to the coal mined at Usibelli Mine in central Alaska. Usibelli Mine has supplied coal for power plant use in central Alaska for many decades. The Flatlands Energy coal energy quality is higher than the Usibelli coal, and similar to the Usibelli coal in that it is exceptionally clean with ultralow sulfur (0.15%) and low mercury and metals. It is a particularly clean (low contaminant) coal, similar to that being utilized in the new low emissions UAF combined heat and power generation station in Fairbanks, Alaska.

Because of the near-surface location of the coal, projected shallow mine extraction costs are competitive in comparison to industry averages. The site has sufficient coal to allow for low to reasonable extraction ratios an estimated 150 years or more. Site reclamation and restoration to original conditions are expected to present no material challenges. A shallow surface mine can

fill in prior mined areas of the pit and begin the reclamation and vegetation regrowth process while operations continue elsewhere.

Delivered Cost of Coal

The proposed Flatlands Energy coal-fired power plant would utilize one of the lowest-cost and lower environmental impact forms of electricity generation, namely transportation of coal from a surface mine located adjacent to a generation station. This is known as a mine mouth generation station, where the mine operations are able to feed coal directly from the mine pit into the generation station. Assumptions for coal fuel cost for electricity generation economics are $3.50/MMBtu.

EXISTING POWER GRID CURRENT AND FUTURE DEMAND

Current Status of Alaska Railbelt Utilities

Power for the Railbelt, the geographic area depicted in Figure 3, is supplied by the following utilities:

- Chugach Electric Association, Inc. (CEA)
- Golden Valley Electric Association, Inc. (GVEA)
- Homer Electric Association, Inc. (HEA)
- Matanuska Electric Association, Inc. (MEA)
- City of Seward (Seward)

These Railbelt electric utilities are interconnected by a bulk electric system that includes generation and transmission (G&T) components owned by the electric utilities and the State of Alaska through the Alaska Energy Authority (AEA) and smaller generation components owned by other entities. The Railbelt bulk electric system is also interconnected with Doyon Utilities, LLC (DU), which provides electric utility services to Fort Richardson, Fort Wainwright, and Fort Greely. The grid also ties-in UAF's combined heat and power plant, which in addition to supplying all electricity and heat for the campus can provide excess power to GVEA (KTVF).

The southern portion of the Railbelt, serving about 50% of Alaska's population in the Mat-Su Valley, Anchorage, and the Kenai Peninsula, is highly dependent on natural gas as a source of electricity and heat. The northern portion of the Railbelt, serving about 15% of Alaska's population in Fairbanks and other interior communities, is highly dependent on coal and petroleum fuels for local generation in addition to natural gas and hydroelectric generation import from utilities in the south.

Figure 4a and 4b show the Cook Inlet natural gas demand and supply forecast presented by the Alaska DNR in July 2023. Shown are supply cases for high, mid, mean, and low production truncated to economic limits (4a), and existing proved developed plus proved undeveloped reserves forecasts (4b). These forecasts exclude known accumulations yet to be developed, such as those owned by Bluecrest, Furie/HEX and Vision. As shown, Railbelt

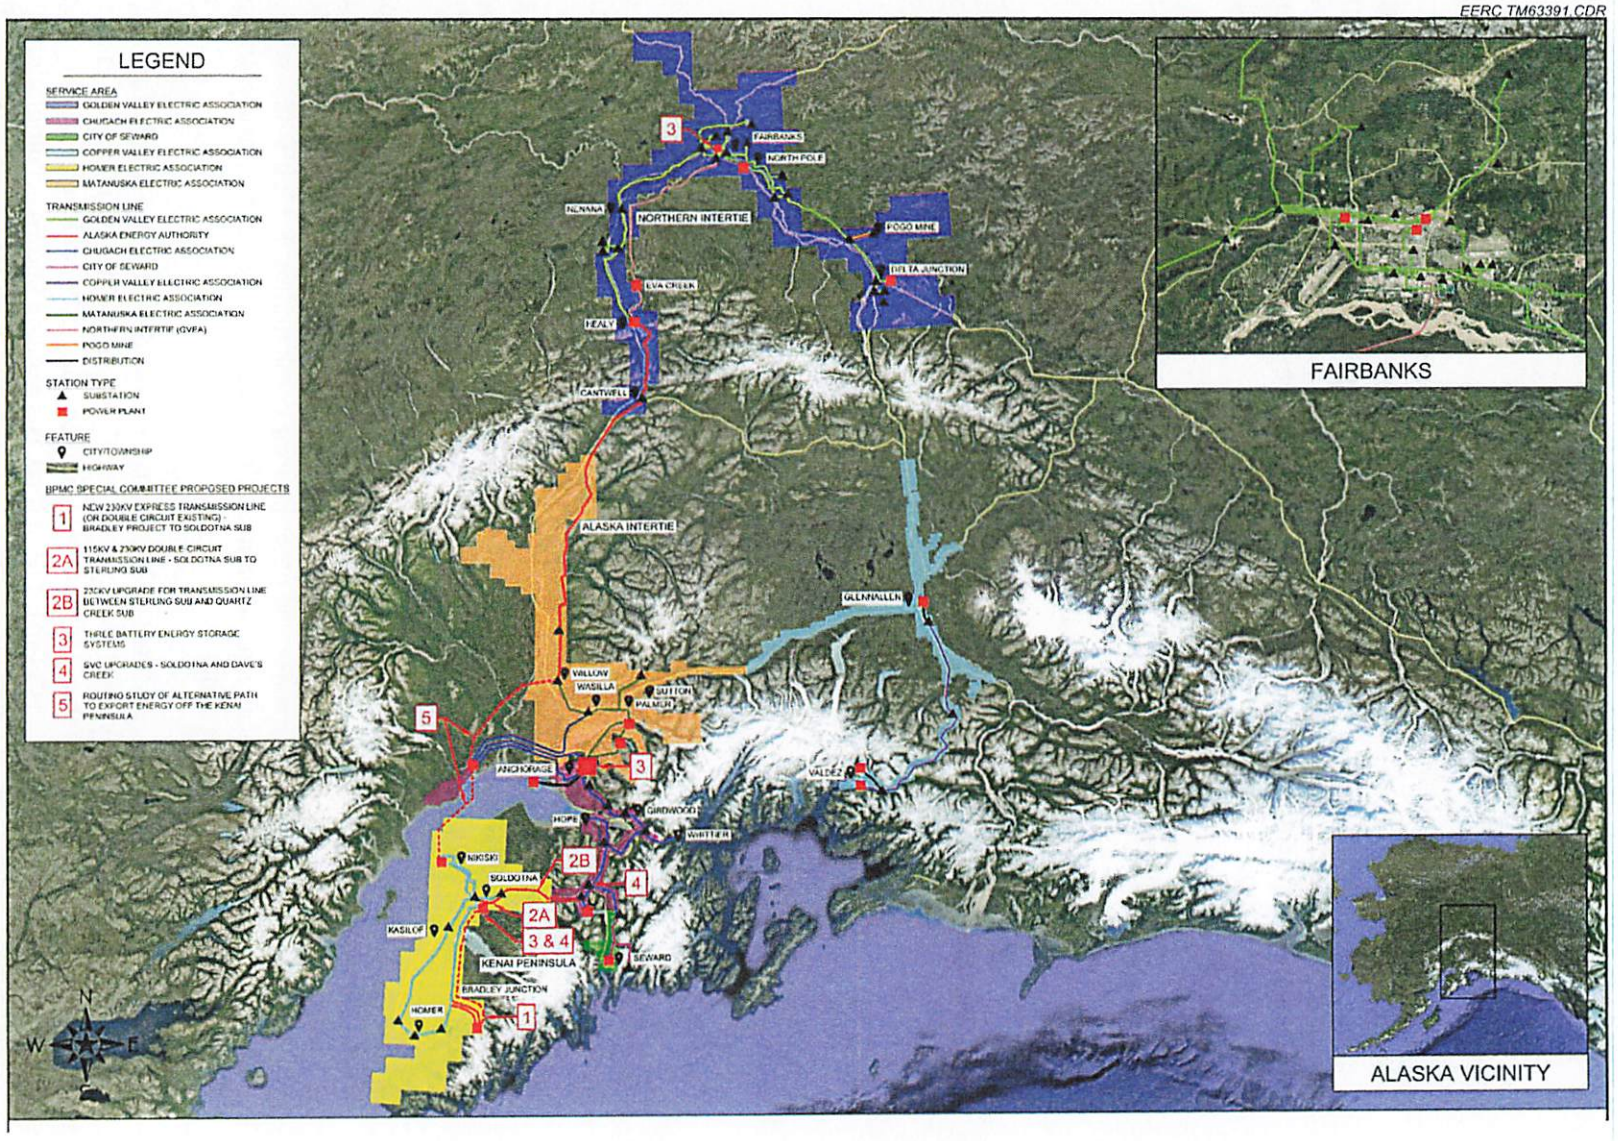

Figure 3. Alaska Railbelt Utilities.

utilities face an imminent shortfall of natural gas supply (AKDNR 2023). Until recently, all Alaska Railbelt utilities planned and met power supply needs separately, with no obligation to coordinate energy supply or generation development or consider grid impacts. The Railbelt Reliability Council (RRC) has recently been created to oversee all regional power supply and transmission planning. (Railbelt Reliability Council, 2022). In January 2024, the RRC directed all electric cooperatives to provide plans for meeting power demand to customers in the event of gas undersupply events (AETP). There is urgency to find alternative energy supply as a majority of the grid depends on natural gas.

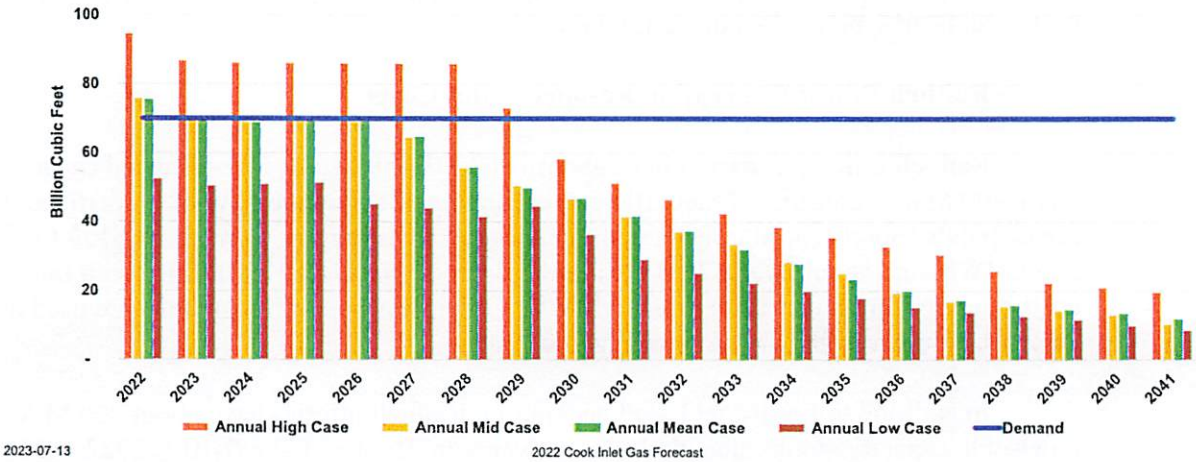

Figure 4a. Cook Inlet Annualized Gas Demand and Supply Forecast, Truncated, DNR.

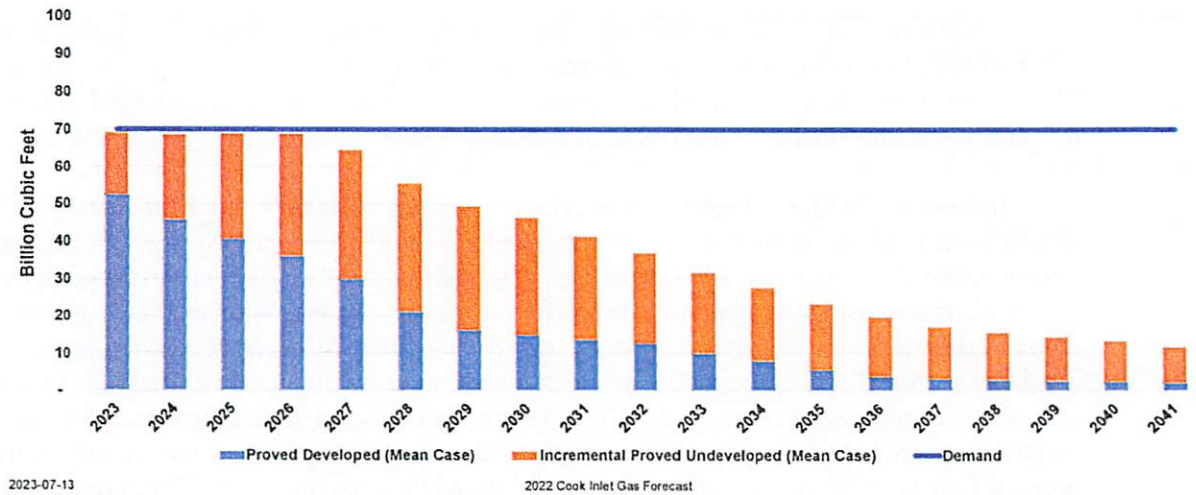

Figure 4b. Cook Inlet Proved Developed+Proved Undeveloped Mean Forecast, Truncated, DNR.

Potential Industrial Power Users

The Flatlands Energy coal reserve is approximately 25 miles from a large, advanced gold-rare earth elements Nova Minerals exploration project and the earlier stage US GoldMining

gold-copper project, and approximately 200 miles from the Donlin Gold proposed mine development. Donlin has been approved and is now in the final investment decision stage.

These new mine developments have not been considered in future grid connection and electricity supply plans, with peak demand projected at more than 200 MW. In order to meet their power needs, these proposed mine developments will have to: (a) add their own generation, and along with that secure a new fuel supply; (b) contract with the Railbelt utilities, which would then need to build additional generation capacity and secure a new fuel supply; or (c) contract with an independent power producer, such as the project described herein, for power from the proposed, nearby biomass-coal plant with CCS.

Railbelt Power Generation Resources and Costs

Railbelt utilities currently have about 1600 MW of installed fossil fueled capacity. Only about 800 MW is considered fuel efficient, consisting of about 600 MW of modern natural gas-fueled plants (Southcentral utilities with fuel-related costs ranging from about $120 to $150/MWh) and about 200 MW of coal- and oil-fired plants (interior utilities with fuel-related costs ranging from about $100 to $400/MWh). Older, less heat-efficient units are used as emergency reserves and are more costly to operate.

In addition to fossil-fuel based generation, Railbelt utilities have about 200 MW of renewable capacity, predominantly hydro-power from Bradley Lake (NREL 2022 Table 2). Costs range from about $40 to $120/MWh with plans to expand. After expansion, costs are expected to exceed $150/MWh.

A recent analysis of the Railbelt's energy system by the National Renewable Energy Lab (NREL) found even with extensive new renewable energy sources including wind and solar, 75% of the current fossil energy-fueled power generation will have to be retained to meet demand when the weather is not conducive to supply renewable energy (NREL 2022).

In January 2024, the University of Alaska Fairbanks-Alaska Center for Energy and Power (ACEP) released a techno-economic report, *Alaska's Railbelt Electric System: Decarbonization Scenarios for 2050*. (Cicilio 2024) That report found that "...the (Railbelt grid) system could not be decarbonized using only variable renewable resources, such as wind and solar power. Some amount of firm source of generation is still required so that sufficient generation is always available. ...fossil-fuel and hydro power generation were the most cost effective firm sources to pair with variable renewables. (p.22)" That report also concluded that nuclear and tidal generation were both more expensive, and that "there is also significant uncertainty in the projected costs and future commercial availability of these technologies." That report's base case economic analysis showed that wind, solar, nuclear, tidal, or hydro power, i.e. re-activating the Susitna-Watana Dam project, would be more expensive than business-as-usual power costs.

In February 2024, Alaska Governor Dunleavy proposed legislation (HB307, SB217) that would, if passed, create a system allowing for the economic dispatch of lowest-cost power at all times. This creates an additional opportunity for low-cost biomass-coal CCS power supply in addition to power purchase agreements. The legislation would eliminate grid wholesale

transmission fees and provide independent power producers the same exemption from local taxes that non-profit electric cooperatives receive (Alaska Office of Governor 2024).

OTHER POTENTIAL BIOMASS-COAL FIRED GENERATION OPPORTUNITIES

Beneficial Uses of CO_2 with Biomass-Coal Generation

A new biomass-coal fired power plant with CCUS is capable of making beneficial use of waste heat and CO_2 to manufacture other useful products, as shown in Figure 5. For instance, direct use of CO_2 and waste heat can enable year-round growing operations and increase product yield for some crops. This would reduce Alaska's dependence on importing food, as presently ~95% of all food is imported. The Alaska import cost for industrial CO_2 supply delivered to the customer is reported to be as high as $2,000/ton, but can be produced by a CCS biomass-coal plant for $50 to $60 per ton. These potential additional uses of heat, CO_2, and other by-products are potential up-sides that are not included in the techno-economic analyses in this report.

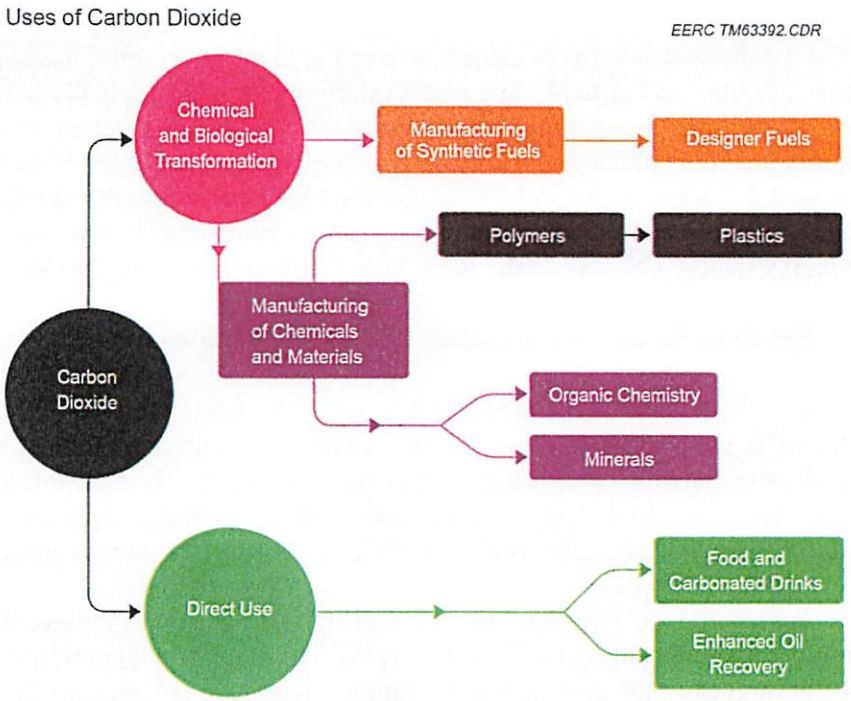

Figure 5. Beneficial Uses of CO_2.

Alaska's Food Security and Supply Chain Independence

Historically, less than 5% of Alaska's food needs have been met from in-state production. In 2022, Alaska Governor Dunleavy created the Food Security and Independence Task Force to proactively pursue measures and incentives for increasing in-state food production and external

supply chain independence (Alaska Department of Commerce, Community, and Economic Development, 2023).

A biomass-coal-fueled power plant with carbon capture is capable of supplying the energy, heat (using waste heat), and CO_2 for greenhouse agricultural operations. In-Alaska greenhouse operations would provide local, secure fresh produce and replace produce grown elsewhere that can require 10–20 days of transportation with significant product waste and added costs. Alaska is also competitively located for North Asian markets. Fresh produce exported from Port MacKenzie would have a shipping advantage relative to some other producing regions.

Fertilizer, Ammonia, and Hydrogen

Potential exists for using the biomass-coal power plant to provide low-cost energy and CO_2 for the manufacture of fertilizer, ammonia, hydrogen, and synthetic fuels. Currently, Alaska imports nearly all of its fertilizer, ammonia, and CO_2 needs.

Concrete Additives and Critical Minerals

Potential exists for coal ash sales from the plant for by-products such as concrete additive, gypsum, and critical minerals, supporting external supply chain independence for Alaska. Currently, Alaska imports ash needed for concrete production. In addition to the potential for critical mineral resourcing from coal and ash itself, the Flatlands Energy location is approximately 50 miles from a USGS-identified high-prospect critical minerals region, in proximity for potential future power supply in the event critical minerals mining is developed in that vicinity (Mining News North, 2023; U.S. Geological Survey, 2015).

Net-Zero Scenarios – Beneficial CO_2 Use or Biomass Energy with CCS (BECCS)

With beneficial CO_2 use or BECCS, power generation can achieve net-zero or net-negative (climate positive) CO_2 emissions. Table 1 and Figure 6 discussed below illustrate net-zero and net-negative CO_2 emission power generation through inclusion of beneficial CO_2 use or biomass energy as a fuel supply. All emissions estimates in this report use only coal as fuel and exclude the emissions benefits from beneficial CO_2 use and biomass energy, except where noted.

Beneficial CO2 Greenhouse Use: Coal power plants can achieve low greenhouse gas emissions by implementing CCS to capture 90% or more of CO_2 emissions. Further, by using waste heat and CO_2, the greenhouse operations are able to enhance productivity and reduce additional coal use and associated CO_2 emissions from heating, which results in net-zero. As shown in Table 1, a 100-MW gross plant, net 75 MW with CCS, supporting a 57-acre greenhouse results in net-zero carbon operation. In this calculation, 90% of emitted CO_2 is captured and sequestered or beneficially used in the greenhouse. Rather than heating the greenhouse with coal, there is an emission reduction, -209 pounds CO_2 per MMBtu, from the beneficial use of power plant waste heat, 2176 MMBtu/day. This reduction is -223 pounds CO_2 per MWh generated, realizing net zero CO_2 emission. Note if CCS achieves 95% capture rather than 90%, emissions drop by half and the required greenhouse acreage for net zero decreases by half to 29 acres.

Table 1. Net-Zero Coal Plant with CCS and Greenhouse Food for Alaska
For a 100 MW gross, 75 MW net plant with CCS

Optionality for Achieving Net-Zero Carbon Operations Coal CO_2 Factors:	**Percentage of CO_2 Output**	**lb CO_2/ MMBtu**	**MMBtu/ MWh**	**lb CO_2/ MWh**
Power Plant Output		209	11	2,229
CO_2 Captured and Sequestered	80%			−1,783
CO_2 Captured and Beneficially Used	10%			−223
Reduction from Beneficial Use of Waste Heat	10%			−223
Net CO_2 Emissions				0

Making Beneficial Use of Waste Heat and CO_2 Coal CO_2 Factors:	**Electric Output, MWh/day**	**Greenhouse Use, Waste Heat, MMBtu/day**	**Greenhouse Use, Short tons/day**	**Greenhouse Use, per day per acre**	**Greenhouses, acres**
Waste Heat Production and Greenhouse Use	2040	2176		38 MMBtu heat	57
CO_2 Greenhouse Use			227 tons CO_2	4 tons CO_2	57

Assumptions:

a) Based on DOE CO_2 emissions rate for coal generation of 100 MW with 85% Capacity Factor with a CCS capturing 90% of emitted CO_2.
b) Based on estimated annualized average and peak waste heat for greenhouse use: 38 MMBtu/day/acre, 152 MMBtu/day/acre.
c) Based on estimated annualized average and peak CO_2 for greenhouse use: 4 tons/day/acre, 6 tons/day acre.
d) Excludes biomass emissions benefits.

Biomass Energy with Carbon Capture and Sequestration (BECCS): Southcentral has biomass suitable as a power plant co-fuel, including forest management, spruce bark beetle kill, agriculture, and/or municipal solid waste. Rather than allowing decomposition, biomass as power plant fuel with CCS reduces CO_2 emissions by capturing then sequestering their CO_2. To determine the net balance requires life cycle assessment of biomass fuel(s) including harvesting and handling, such as outlined in the Energy and Environmental Science Journal. (EESJ 2017)

"Because the biomass draws carbon from the atmosphere as it grows, BECCS can be a negative emissions technology when it is implemented well. That is, BECCS could serve to draw down the concentration of carbon dioxide (CO_2) in the atmosphere. However, care must be taken to ensure that emissions from the growing, harvesting, transporting, and processing of the biomass do not outweigh the captured carbon, and that the storage of captured carbon is reliable over long timescales." (American University Washington DC, 2020)

Net-negative power carbon intensity with BECCS can be achieved through system design including biomass type, supply chain, storage and handling, and burner considerations. Carbon intensity of generated power varies depending on biomass, net water use, pellet moisture content, carbon footprint (CF), supply chain emissions, and power plant cofiring and capture rate percentage as Figure 6 illustrates (from EESJ Figure 15). Carbon intensity improvements in Alaska may be substantially different, perhaps better, than illustrated in Figure 6 which is for cultivated miscanthus dried and pelletized for use as a fuel. Standing dead spruce bark beetle kill is low moisture content and an excellent fuel supply, for example. "Based on the overall rate of decomposition estimated (1.5% per year), it would take close to 200 years for beetle-killed trees to disappear…. Based on a simple model of forest regrowth, and assuming that beetles kill an entire stand of spruce trees, it is likely that this disturbance will cause forests to lose carbon to the atmosphere for 60 to 70 years. The rate forests are regenerated would have a very large impact on the amount of carbon released during this time, and even a 20-year lag in tree establishment could double these losses." (USDA Forest Service, 2005) Overflight of the region in summer 2023 showed substantial spruce bark beetle killed trees in the area. Depending on the harvest and transport supply chain, these make excellent biomass fuel.

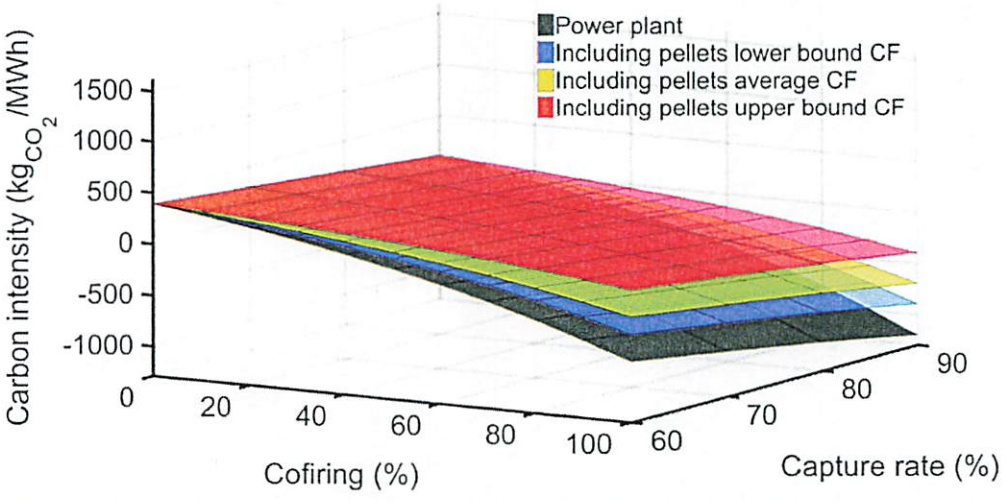

Figure 6. Carbon Intensity vs. Biomass Cofiring % and CO_2 Capture Rate % (from EESJ)

"BECCS typically refers to the integration of trees and crops that extract CO_2 from the atmosphere as they grow, the use of this biomass in power plants, and the application of carbon capture and sequestration via CO_2 injection into geological formations.... In its Fifth Assessment Report, the Intergovernmental Panel on Climate Change (IPCC) select[s] BECCS as the lowest cost option to reach the temperature objectives for the second half of the century (high confidence) and that BECCS plays an important role in many low-stabilization scenarios (with limited evidence and medium agreement)." (National Academy of Sciences, 2019, p.137). This study from the U.S. National Academy of Sciences estimates a global potential to sequester 3.4–5.2 $GtCO_2$ per year via BECCS without large adverse impacts. Biomass conversion technology readiness level (TRL) is Commercial, TRL greater than 10 (NAS, 2019, p.145).

POWER PLANT LOCATION, TRANSMISSION ROUTES, AND PROPERTIES

Transmission Intertie

The Flatlands Energy reserve is located approximately 46 miles in a straight line from the Beluga power plant and grid intertie. The Beluga power plant is reaching the end of its useful life. Two of the six natural gas turbine generators have been retired. The remaining four units are used solely for reserve power and meeting peak demand needs. The Beluga River power plant can provide power to the grid power via an intertie with 500+ MW capacity.

The Donlin Gold pipeline right of way passes within a few miles of the Flatlands Energy reserve and travels within a few miles of the Beluga power plant and crosses the electricity grid. This is a possible corridor for a high-line power transmission line from the Flatlands Energy reserve to the regional grid intertie.

With the Beluga River plant nearing its service life end, its intertie has capacity to deliver power to the Railbelt transmission system. This is one option to connect a major new power generation plant. Other interconnect points are at Milepost (MP) 0 of the Donlin Gold pipeline corridor, near the high-voltage lines of CEA, or at Point MacKenzie. Further study of interconnection points is needed to select the optimal electrical tie-in point.

Power customers are assumed to permit and install their own power lines independent of this project. Such costs and permitting are not addressed in this study.

CFB Advantages and Compatibility with Renewable Energy

The circulating fluidized bed (CFB) boiler system selected for this feasibility study is a commercially proven, well-understood system that provides several advantages. The CFB system, selected for the recent coal-fired combined heat and power generation station built at the UAF campus in Fairbanks, Alaska, is designed to achieve economy, reliability, and flexibility.

Modularization is key in construction-related cost savings. CFB systems can be built as a module, e.g. in 100 MW increments, for Southcentral needs and enable expansion for future developments. Additional generation capacity can be added in relatively small increments as new customer demand is identified. This is a significant change from a historical approach of

overbuilding generating station capacity and anticipating that new demand will follow. Modularization is also key for the adjacent carbon capture plant, i.e., having large sections of the facility built off-site as modules would minimize on-site construction and result in significant cost savings (International CCS Knowledge Centre, 2018).

An advantage of CFB systems over historical coal-fired boiler systems is that CFB can be designed to load-follow, meaning that as electricity demand increases or decreases, CFB systems can ramp up or down. CFB systems can, therefore, work in concert with alternative energy sources such as solar and wind that provide variable power generation. Engineering analysis is required in order to determine if this system, when combined with CCS, can similarly be expected to load-follow.

Another key advantage of CFB technology is that pollution control is built into the combustion process. By adding low-cost limestone into the CFB, SO_x is captured and removed at the point where it is formed. The CFB's low combustion temperature, about 1000°F less than a conventional pulverized coal (pc) peak temperature, minimizes NO_x formation. The Flatlands Energy coal contains ultralow levels of sulfur and low levels of nitrogen, which support lower emissions in need of capture.

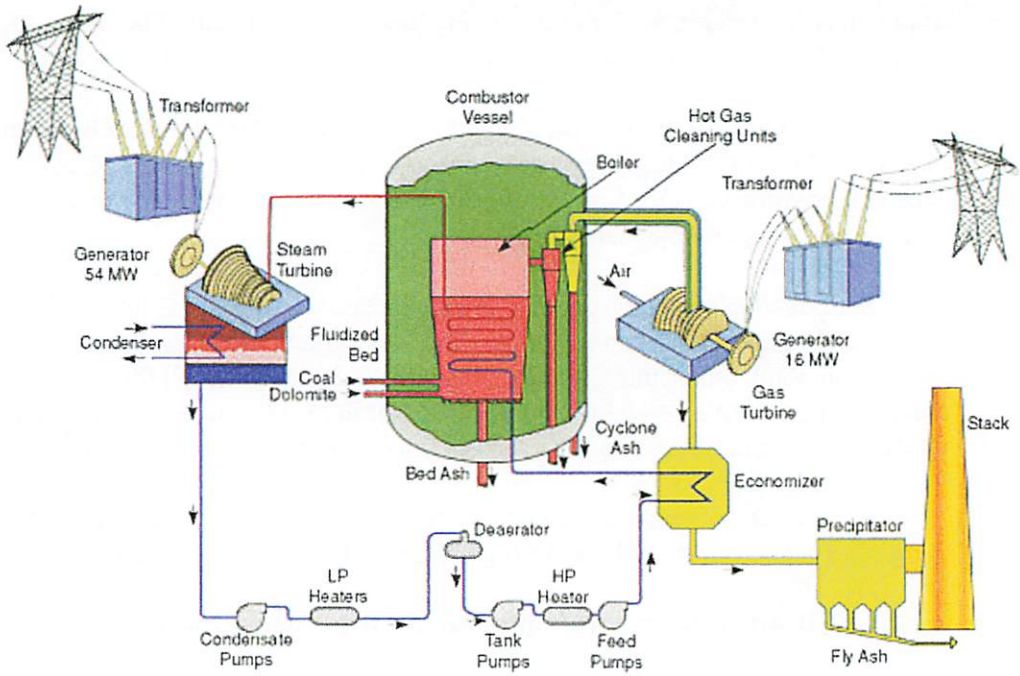

Figure 7. Coal CFB Combined-Cycle Process, Without CCS
www.sciencedirect.com/topics/engineering/circulating-fluidized-bed-combustion.

Figure 7 shows an example CFB combined-cycle power generation system without a CCS plant. Advantages of CFB systems include the following:

- Load-following; works in concert with alternative energy sources

- Modular and expandable
- Low emissions
- High combustion efficiency
- High reliability and availability
- Low maintenance costs
- Compact, economical design
- Reduced erosion
- Fuel flexibility
- Proven technology and performance
- Costs associated with CFB systems are well known.

POWER COSTS: NATURAL GAS (WITH PRICE SENSITIVITY) VS. BIOMASS-COAL

In this study, baseline Southcentral power costs are calculated using three separate approaches for natural gas-fired power. For each approach, electricity rates were calculated for $7.07 (current), $15, $20, and $25/MMBtu (future) natural gas prices. The future natural gas price range represents imported LNG, new Cook Inlet gas, or North Slope gas as described in the section Competitor Analysis. The first approach uses *CEA's approved pricing* for firm power service to large industrial and utility customers. The second approach estimates the *avoided cost* from all current producers, providing more of a common basis for electricity producers. The final approach applies the cost estimation methodology for the proposed biomass-coal fired power plant to a *new gas-fired power plant*, recognizing a new gas-fired plant may be more efficient than CEA's existing power fleet, thus providing the lowest hypothetical cost of gas-based power. Note this hypothetical gas-fired power cost is likely understated since it assumes a single generating turbine rather than multiple turbines that may be required for grid stability.

Current Approved Pricing

CEA's generation and transmission (G&T) rates are based on CEA's November 4, 2020, approved Schedule 760 tariff for limited all requirements service at primary voltage subject to availability. The G&T rate represents CEA's approved pricing for providing firm power service to large industrial and utility customers. It excludes additional costs that new industrial customers such as Donlin Gold and Nova Minerals would be required to pay, such as transmission costs outside of CEA's existing service area. CEA's residential and commercial service rates are ~12% higher than the G&T rates.

The CEA G&T electricity rates were calculated for $7.07, $15, $20, and $25/MMBtu natural gas prices, as shown in Table 2. These price scenarios are developed to assess how the G&T rates, currently with $7.07/MMBtu natural gas based on CEA's most recent report, might be impacted with imported liquefied natural gas (LNG) based an Asia-Pacific LNG import futures market assessment. "Cook Inlet natural gas prices have not been static, rising 5% on average per year for the past decade and are now approximately $8 per Mcf." (CEA 2023) These gas prices are also consistent with the "2040 blended fuel cost" estimate in the Renewable Portfolio Standard Assessment for Alaska's Railbelt (Denholm and others, 2022) and with the natural gas supply options discussed the *Competitor Analysis* section.

The low LNG import price, $15/MMBtu, was derived from the DOE Office of Fossil Energy and U.S. Energy Information Administration (EIA) websites and industry websites such as Natural Gas Intelligence (NGI), Reuters, and AL FRED. The low and mid- LNG prices used here are also consistent with the $16.6/MMBtu "2040 Blended Fuel Cost" that is assumed to be composed of 78% natural gas from the Renewable Portfolio Standard Assessment for Alaska's Railbelt report (Denholm and others, 2022). As of 2020 through 2022, the Asia-Pacific LNG market price is approaching $30/MMBtu but is forecasted to come back down into the $20 to $25/MMBtu range. Europe's recent pivot from Russian gas supply makes this price range unpredictable, with some forecasters projecting higher prices. LNG-based electricity pricing may see substantial long-term upward pressures. Market disruptions in mid-2022 drove LNG spot above $50/MMBtu for a short time (Federal Reserve Bank of St. Louis, 2022 and FRED data).

Table 2. CEA G&T Electricity Cost, $/MWh

		CEA G&T Tariff Rates			
Description	**Units**	**$7.07/MMBtu**	**$15/MMBtu**	**$20/MMBtu**	**$25/MMBtu**
Capacity Charges	$/MW-month	$45,430	$45,430	$45,430	$45,430
Capacity Factor	%	85%	85%	85%	85%
Average Capacity Charges	$/MWh	$74.2	$74.2	$74.2	$74.2
Energy					
Energy Charge	$/MWh	$48.8	$48.8	$48.8	$48.8
FPP Factor	$/MWh	$64.9	$137.8	$183.7	$229.6
Total Energy	$/MWh	$113.7	$186.6	$232.5	$278.4
Totals	**$/MWh**	**$188.0**	**$260.8**	**$306.7**	**$352.7**

Assumptions:

a) Based on CEA November 4, 2020 approved Schedule 760 tariff for limited all requirements service at primary voltage subject to availability of generation capacity. Transmission costs not included for service outside of service area.
b) Residential and commercial service rates are ~12% higher than CEA G&T rates.
c) CEA would require new generation to provide estimated power service of large new mines in the 200-MW range, with new transmission provided and/or funded by others.
d) Capacity factor represents how much available capacity is used on average by customers.
e) Capacity Charge includes capital and fixed O&M costs.
f) Energy Charge is a mechanism to recover variable O&M and incidental costs.
g) FPP (fuel and purchased power) factor is a mechanism to recover fuel costs.
h) Average Heat-Rate, 9.185 MMBtu/MWh, is how much energy it takes to produce a unit of power. It is based on Exhibit 1 of CEA's Sep 29, 2023 COPA quarterly power adjustment filing.

Considering other natural gas supply options, the *Cook Inlet Gas Supply Project Phase I Assessment Report* commissioned by the Alaska Utilities Working Group assesses relative cost and availability of natural gas supply options. Berkeley Research Group (BRG) and Cornerstone Energy Services delivered the report June 28, 2023 (BRG 2023). Black & Veatch (BV) prepared the *Chugach Gas Supply Option and Market Assessment* for Chugach Electric Association, Inc., filed August 11, 2023 with the RCA. Six natural gas supply options are evaluated and found to supply gas at higher than today's price, a key driver for future electricity costs with natural gas.

From Table 2, the CEA G&T rate is $188/MWh for fuel at $7.07/MMBtu. Power cost increases 39%, 63%, and 88% for $15, $20, and $25/MMBtu fuel, respectively (CEA 2020).

Avoided Cost

The CEA G&T rate discussed above represents a delivered cost of electricity to industrial consumers including non-generating expenses, installed capacity charges, and other fees. To provide another cost comparison to a new biomass-coal fired plant, these rates can be adjusted to an estimate avoided cost, i.e., the incremental cost an operator would avoid by not having to generate power, instead substituting or replacing it with power generated from another source. The avoided cost methodology provided here, while simplified, is expected to be sufficiently accurate for comparison purposes. The current avoided cost of electricity from gas is estimated to be $114/MWh as shown in Table 3, and escalates rapidly with increasing gas prices.

Table 3. Avoided Electricity Cost, $/MWh

		CEA G&T Tariff Rates Excluding Capacity Charge			
Description	**Units**	**$7.07/MMBtu**	**$15/MMBtu**	**$20/MMBtu**	**$25/MMBtu**
Capacity Charge	$/MWh	$0.0	$0.0	$0.0	$0.0
Energy					
Energy Charge	$/MWh	$48.8	$48.8	$48.8	$48.8
FPP Factor	$/MWh	$64.9	$137.8	$183.7	$229.6
Total Energy	$/MWh	$113.7	$186.6	$232.5	$278.4
Totals	**$/MWh**	**$113.7**	**$186.6**	**$232.5**	**$278.4**

Assumptions:

a) Same as Table 2, CEA G&T, except excludes Capacity Charge, i.e., excludes capital plus fixed O&M costs, to emulate an avoided energy cost comparison using existing power generation capacity. Included are Energy Charge and FPP, i.e., includes variable O&M and fuel costs.

New Gas Plant Scenario, Single Turbine, Without CCS

Tables 2 and 3 were generated from CEA's published rates, with avoided costs in Table 3 being estimated by zeroing-out capacity charge. As discussed, about half of the generation equipment can be considered efficient while the other half is more costly to operate and typically provides reserve capacity. Published rates represent the combined blended performance of these equipment. As such, a third and final gas-fired power cost estimating approach is provided to represent a hypothetical new, high efficiency gas fired plant, though no such proposal to install new gas-fired generation is known and may in fact be unlikely in the face of fuel supply shortfalls and cost uncertainty.

In this third approach for new gas-fired power cost estimating, a single turbine configuration was assumed for lowest capital and operating costs. However, if built for the Railbelt, a new gas plant would likely require multiple turbines to ensure that an unexpected loss of a unit would not cause a major system-wide power outage and to provide redundancy for unplanned outages. Thus, new gas plant costs may be higher than shown here.

Two new gas-fired power costs were estimated, a larger, 600 MWe, more efficient combined cycle plant and a smaller, 100 MWe, less efficient simple cycle plant. See GE Vernova for simple vs. combined cycle power discussion. A new large-scale, high-efficiency natural gas-fired combined cycle power plant operating at constant baseline conditions could be expected to produce less expensive electricity than a new biomass-coal fired power plant of similar size but

only if (a) it is single turbine configuration, which likely does not meet grid reliability needs; (b) if current natural gas prices were to hold constant; and (c) CCS is not required. Smaller single-cycle natural gas power plant could produce electricity at a similar cost to those of a new biomass-coal power plant with present Cook Inlet gas prices. This is to be expected, as natural gas plants do not require solids handling, desulfurization, or ash disposal. However, as seen in Table 4, the cost for gas-based electricity rapidly increases with increasing gas prices and would rapidly exceed the costs for biomass-coal electricity discussed below. Even under the most favorable assumptions, gas-fired power is only cost competitive with biomass-coal in the short term given the Cook Inlet gas supply shortfall and increasing cost of other natural gas supply options for the region.

Power Cost Comparison CEA (Current Gas Price) vs. Biomass-Coal Without CCS

Biomass-coal power generation cases evaluated range from a small 25-MW generation unit to 500 MW, as shown in Table 5. Costs of plant capital, O&M, and fuel are shown, and electricity prices are calculated. The current G&T cost for CEA is shown for comparison. Biomass-coal fired generation without CCS delivers at substantially lower cost than current G&T industrial rates from CEA gas generation. The cost estimate uncertainty range is -30% low side to +50% high side, consistent with a Class 5 conceptual engineering estimate. (AACE RP 87R-14)

Power Cost Comparison: Natural Gas vs. Biomass-Coal Without CCS

In comparison with gas-fired power in Tables 2, 3, and 4, CEA G&T, avoided cost, and new gas plant, respectively, biomass-coal fired power is lower cost than CEA G&T at all gas fuel prices. Biomass-coal power from plants larger than 100 MW are cost-competitive with or cheaper than avoided costs for existing generation or for new single-cycle gas plants. While a new large-scale combined cycle gas plant could produce electricity at a lower cost than biomass-coal if gas prices were to hold constant over 30 years, gas-based electricity costs rapidly escalate with rising gas fuel price, so this cost advantage is expected to be short-lived in the face of the depleting local gas supply and a near-term need for securing additional gas.

Figure 8 compares three cases: At left is CEA G&T power for a range of fuel gas prices without any new generation. At center is for a new 600 MW high-efficiency combined cycle gas plant with the same variations in gas price. At right are for new biomass-coal fired generation at several a range of plant sizes.

The natural gas fuel price sensitivity range, in $/MMBtu, includes recent price ($7.07), and low ($15), mid- ($20), and high ($25) future natural gas prices.

Table 4. New Gas-Fired Electricity Cost, $/MWh

Description	Units	Single Cycle, 100 MWe				Combined Cycle, 600 MWe			
Capacity	MW	100				600			
Capital Costs	× 1,000,000	$195				$1701			
Capacity Charges	$/MW-mo	$10,462				$15,223			
Fixed O&M	$/MW-mo	$1,135				$1363			
Capacity Factor	%	85%				85%			
Average	$/MWh	$19.0				$27.1			
Variable O&M	$/MWh	$5.1				$1.8			
Fuel	$/MMBtu	$7.07	$15.00	$20.00	$25.00	$7.07	$15	$20	$25
Av. Heat Rate	MMBtu/MWh	11.4				7.6			
Energy Cost	$/MWh	$80.4	$170.6	$227.5	$284.3	$53.6	$113.7	$151.7	$189.6
Total Energy	$/MWh	$85.5	$175.7	$232.6	$289.4	$55.4	$115.5	$153.5	$191.4
Totals	**$/MWh**	**$104.5**	**$194.7**	**$251.5**	**$308.4**	**$82.5**	**$142.6**	**$180.6**	**$218.5**

Assumptions:

a) CAPEX and fixed O&M costs are taken relative to biomass-coal CAPEX costs in Table 5, with the ratio of 2022 costs based on ranges published by NREL (https://atb.nrel.gov/electricity/2022/index)

b) CAPEX: $10,000,000/MWe (small biomass-coal estimate) × $0.922MM/MWe (gas, low) ÷ $3.075MM/MWe (biomass-coal, low) = $1,948,943/MWe, 100 MW case

c) CAPEX: $6,500,000/MWe (large biomass-coal estimate) × $2.324MM/MWe (gas, high) ÷ $5.327MM/MWe (biomass-coal, high) = $2,835,742/MWe, 600 MW case

d) 100 MW single-cycle gas plant is 30% efficient on an HHV basis, which is lower than LHV basis and also allows for some inefficiencies to load following.

e) 600 MW combined-cycle gas plant is 45% efficient on an HHV basis.

f) Variable O&M is based on 2022 values published by NREL (https://atb.nrel.gov/electricity/2022/index), with the upper range assumed for a small load-following single-cycle plant and the lower range assumed for a large combined-cycle plant operating at constant load.

g) Flatlands Energy power supply options exclude new transmission requirements and associated costs.

h) Capacity factor represents how much of the available capacity is being used on an average basis by customers.

i) Average Heat-Rate represents how much energy it takes to produce a unit of power output on an HHV basis.

j) CAPEX is debt financed at 5% over 30 years (same assumption used for biomass-coal)

k) 100 MW, $1,948,943/MW: −$1,046,235 per month debt service.

l) 600 MW, $2,835,742/MW: −$9,133,727 per month debt service.

Table 5. Biomass-Coal Fired Electricity Cost, $/MWh

For Plants from 25 MW to 500 MW. Two Sizes Highlighted Red have Corresponding CCS for Total Cost of Electricity Calculations

Description	Units	CEA G&T, Current Price $7.07/MMBtu	Biomass-Coal Power Plant						
Capacity	MW		25	50	100	200	300	400	500
Capital Costs	× 1,000,000		$250	$475	$650	$1235	$1760	$2229	$2647
Capacity Charges	$/MW-mo	$45,430	$53,682	$50,998	$34,893	$33,149	$31,491	$29,917	$28,421
Fixed O&M	$/MW-mo		$4500	$4275	$4000	$3800	$3610	$3430	$3258
Capacity Factor	%	85%	85%	85%	85%	85%	85%	85%	85%
Average	$/MWh	$74.2	$95.1	$90.3	$63.6	$60.4	$57.4	$54.5	$51.8
Energy									
Energy Charge	$/MWh	$48.8							
FPP Factor	$/MWh	$64.9							
Variable O&M	$/MWh		$12.0	$11.0	$10.0	$9.0	$8.5	$8.0	$7.5
Fuel	$/MMBtu		$3.5	$3.5	$3.5	$3.5	$3.5	$3.5	$3.5
Av. Heat Rate	MMBtu/MWh		11.0	11.0	10.5	10.5	10.5	10.5	10.5
Energy Cost	$/MWh		$38.5	$38.5	$36.8	$36.8	$36.8	$36.8	$36.8
Total Energy	$/MWh	$113.7	$50.5	$49.5	$46.8	$45.8	$45.3	$44.8	$44.3
Totals	**$/MWh**	**$188.0**	**$145.6**	**$139.8**	**$110.4**	**$106.2**	**$102.7**	**$99.3**	**$96.1**

Assumptions:

a) Based on CEA's November 4, 2020, approved Schedule 760 G&T tariff for limited all requirements service at primary voltage subject to availability of generation capacity with transmission costs not included for service outside its service area.
b) CEA's current residential and commercial service rates are ~12% higher than G&T rates.
c) CEA would require new generation to provide estimated power service needs of the large new mines in 200-MWe range and would require new transmission to be provided and/or funded by others.
d) Flatlands Energy power supply options exclude new transmission infrastructure requirements and associated costs.
e) Capacity factor represents how much of the available capacity is being used on an average basis by customers.
f) Energy Charge is a mechanism where CEA recovers its variable O&M and incidental costs.
g) FPP (fuel and purchased power) factor is a mechanism CEA uses to recover fuel costs.
h) Average Heat-Rate, 9.185 MMBtu/MWh, represents how much energy it takes to produce a unit of power output. It is based on Exhibit 1 of CEA's Sep 29, 2023 COPA quarterly power adjustment filing.
i) Constructed cost of CFB coal plants based on recent construction of similar 20-MW plant in interior Alaska of about $10,000,000/MW financed at 5% over 30 years.
j) 25 MW $10,000,000/MW $250 ×1,000,000: −$1,342,054 per month debt service. Discount for additional units: 95%.
k) 100 MW $6,500,000/MW $650 ×1,000,000: −$3,489,341 per month debt service. Discount for additional units: 95%.

New biomass-coal fired power is lower cost than the existing CEA G&T rate in every case, primarily owing to the fact that much existing CEA power is low-efficiency intermittent generation while new biomass-coal fired generation would be baseload power. CEA power, currently $188/MWh, could increase to $353/MWh, an 88% price increase, if the gas price is $25/MMBtu. While a large high-efficiency combined cycle gas plant could be cheaper than biomass-coal at current gas prices over 30 years if today's prices held, high future gas prices are expected to make even a small biomass-coal plant cost-competitive, while larger biomass-coal fired plants (with better economies of scale) would provide materially lower-cost electricity. Of note, even assuming long-term sustained current gas rates of $7.07/MMBtu, a large biomass-coal fired power plant with CCS could provide power at prices nearly on par with a new high-efficiency combined cycle natural gas plant but without CCS included. New biomass-coal fired generation with CCS provides new power generation infrastructure with a ~50-year lifespan to the grid at a lower cost of future power and with lower emissions than sourcing new gas for an existing gas fleet with declining lifespan (scenario at left).

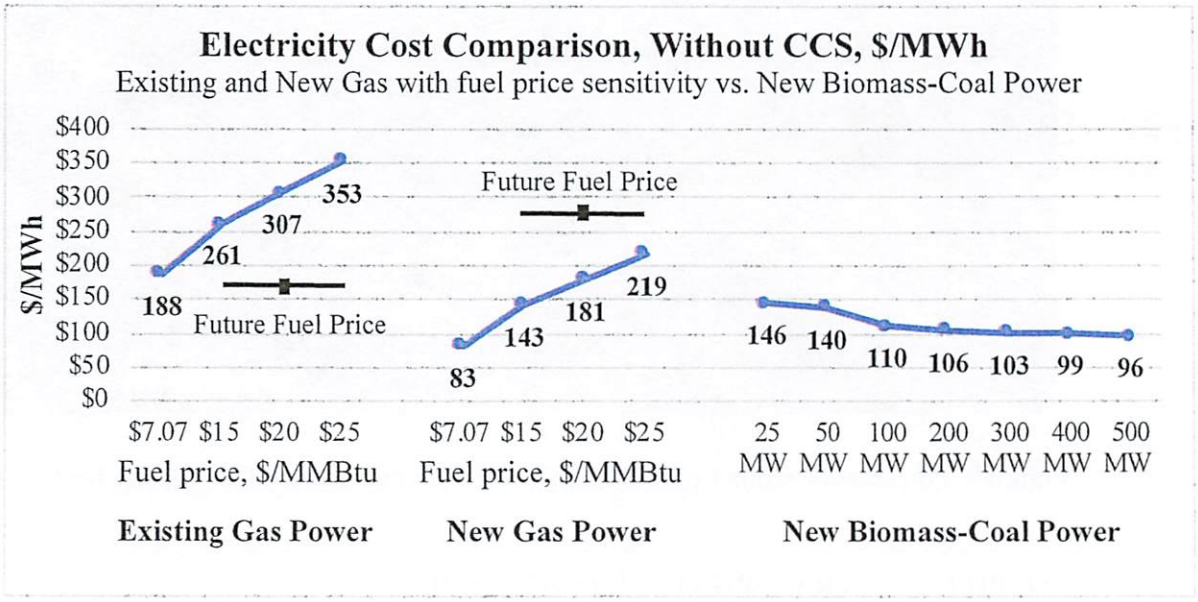

Figure 8. Electricity Cost Comparison, Without CCS, $/MWh
Existing CEA G&T Gas and New Gas with fuel price sensitivity vs. New Biomass-Coal Power.

CARBON CAPTURE PROCESS, TECHNOLOGY, AND DESIGN

Flue gas preconditioning is essential for the CO_2 capture process. Preconditioning cools and reduces flue gas impurities, which improves CO_2 absorption reaction kinetics and mitigates solvent degradation. As shown in Figure 9, flue gas preconditioning includes a flue gas cooler (FGC), flue gas desulfurization (FGD), and a flue gas quencher further cooling the gas and removing residual traces of sulfur. Within the FGD train, pulverized limestone is chemically converted to gypsum during the desulfurization process. Gypsum may be beneficially used to manufacture panel-grade drywall rather than being landfilled.

CO_2 is removed by contacting flue gas with an amine solvent which absorbs CO_2. The CO_2-rich solvent is regenerated for reuse by heating, which releases captured, concentrated CO_2. Captured CO_2 is then dehydrated and compressed for pipeline transport to the storage site.

One commercial option to capture the CO_2 emissions from a biomass-coal fired power plant is the MHI KM-CDR process. The MHI KM-CDR process has been used at the Petra Nova project, where it has demonstrated the ability to capture >90% of the CO_2 from the W.A. Parish coal-fired power plant. MHI touts the KM-CDR as featuring a modular and standardized design, allowing it to potentially scale with a similarly modular CFB for power generation that could be implemented in stages. The MHI process is the selected CO_2 capture technology for this study.

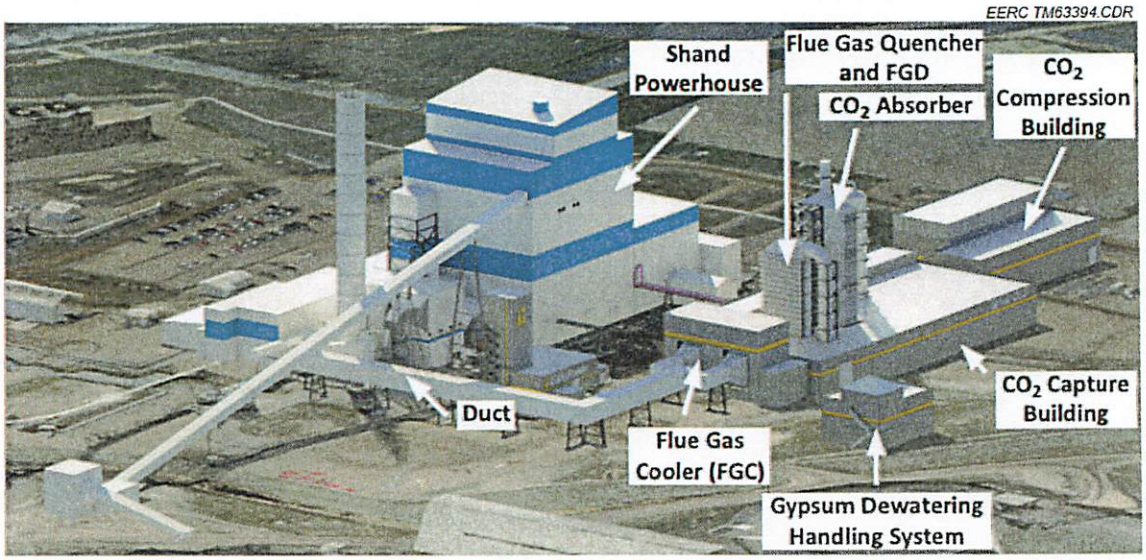

Figure 9. Power and Carbon Capture Plant Layout (International CCS Knowledge Centre, 2018).

CO_2 PIPELINE TRANSPORTATION AND ROUTE

This assessment assumes installation of an American National Standards Institute (ANSI) Class 900 spec CO_2 pipeline, designed for 2200-psig service, sized for plant capacity. Pipelines were sized such that no booster pump station was required. Pipeline transportation of CO_2 over longer distances is most efficient and economical when the CO_2 is in the dense (liquid) phase with pipeline pressures above 1080 psi. It is often preferrable and lower cost to size the pipeline large enough so a booster pump(s) is not required. CO_2 must be dehydrated to reduce the risk of pipeline corrosion. There are a few examples of existing pipelines converted to CO_2 service at lower pressure for low flow rates and/or short distances (less than 100 miles). CO_2 transport by truck and rail cost ranges from three to ten times more expensive per ton than by pipeline (National Petroleum Council, 2019).

This project's pipeline and power line are proposed to share the same corridor for cost estimation purposes, which has a nominal distance of ~75 miles including 5 miles for contingency. The route follows the Donlin Gold pipeline corridor from the mine site to tidewater

then westward to the Beluga River gas field and electrical grid intertie. The route runs alongside the West Susitna Access Road from the Flatlands Energy reserve to Donlin Gold pipeline's MP30. At MP30, the pipeline and transmission line head south to tidewater, while the West Susitna Access Road heads east to the port. A local ANSI Class 900 spec distribution network at the Beluga River gas field would be constructed to tie in individual CO_2 injection wells. No CO_2 booster pump station was required for this project. Other potential CO_2 storage locations will be evaluated by the pending ARCCS Project. (U.S. DOE FECM press release, November 14, 2023)

CARBON STORAGE LOCATION OPTIONS

A high-level screening of reservoirs found the Cook Inlet Basin is one of the areas with the highest potential for CO_2 storage in Alaska (Shellenbaum and Clough, 2010). For this study, the target geologic CO_2 storage formation is a depleted gas or oil field. Such fields have a proven seal that has stored gas over geologic time with well-defined storage capacity. Several such fields exist in the northern Cook Inlet region. Based on volumes of natural gas produced to date, a preliminary estimate of the geologic CO_2 storage capacity in the area is sufficient for ~60 years of injection of CO_2 in the Beluga River Unit, highlighted by the purple arrow in Figure 10, for the project's 300-MW-net biomass-coal fired power plant with CCS. Alternative storage sites include secure saline aquifers or unmineable coal seams, but these require geologic and geophysical study, and possibly new appraisal data, to assure their capacity and ability to permanently store CO_2. An example of a study of a saline aquifer close to the proposed project area is Pantaleone and Bhattacharya (2021).

A pending geological and engineering study will calculate the CO_2 storage capacity in this region, the Alaska Railbelt Carbon Capture and Storage (ARCCS) Project by University of Alaska. This Project was selected by the US DOE for a Carbon SAFE Phase II storage volume analysis including technical, economic, and community assessments for potential CO_2 storage complexes (U.S. DOE FECM, November 14, 2023 and Northern Journal, Dec 2023).

Figure 10, a Cook Inlet Basin location map, is taken from a geologic storage assessment for several oil and gas fields and the Hemlock Formation generally. Figure 11 shows the Hemlock in relation to the Beluga Formation in the stratigraphic column. For the overall basin, the saline aquifer Hemlock Formation has 0.91 to 16.61 Gt (P_{10} to P_{90}) storage capacity, with a P_{50} capacity close to the mean of 4.33 Gt, equivalent to 1800 years of carbon storage capacity for a 200-MW-net plant (Pantaleone and Bhattacharya, 2021). Hemlock Formation storage is one alternative to the selected CO_2 storage site discussed below, and underlies the Beluga River Field.

Depleted Oil and Gas Reservoirs

For Alaska-based CO_2 storage projects, storage in depleted gas reservoirs may be preferred as these have more available data sets formations to understand the subsurface than saline and oil and gas reservoirs have proven cap rock integrity. Developed field well data helps characterize geologic properties, including gas storage capacity, reservoir properties, and cap

rock seal integrity. Therefore, this study considered as primary CO_2 storage targets the natural gas reservoirs in the Cook Inlet region, many of which are forecast to be nearly depleted.

One of the larger fields available for storage in the near future is the Beluga River Unit (Beluga/Sterling). Beluga River has an added benefit of onshore access, resulting in lower injection well costs than offshore wells. The Beluga River Unit is highlighted by the purple arrow in Figure 10. Discussion with the field Operator, Hilcorp, indicates remaining natural gas production can continue while initiating CO_2 sequestration in this multi-zone reservoir.

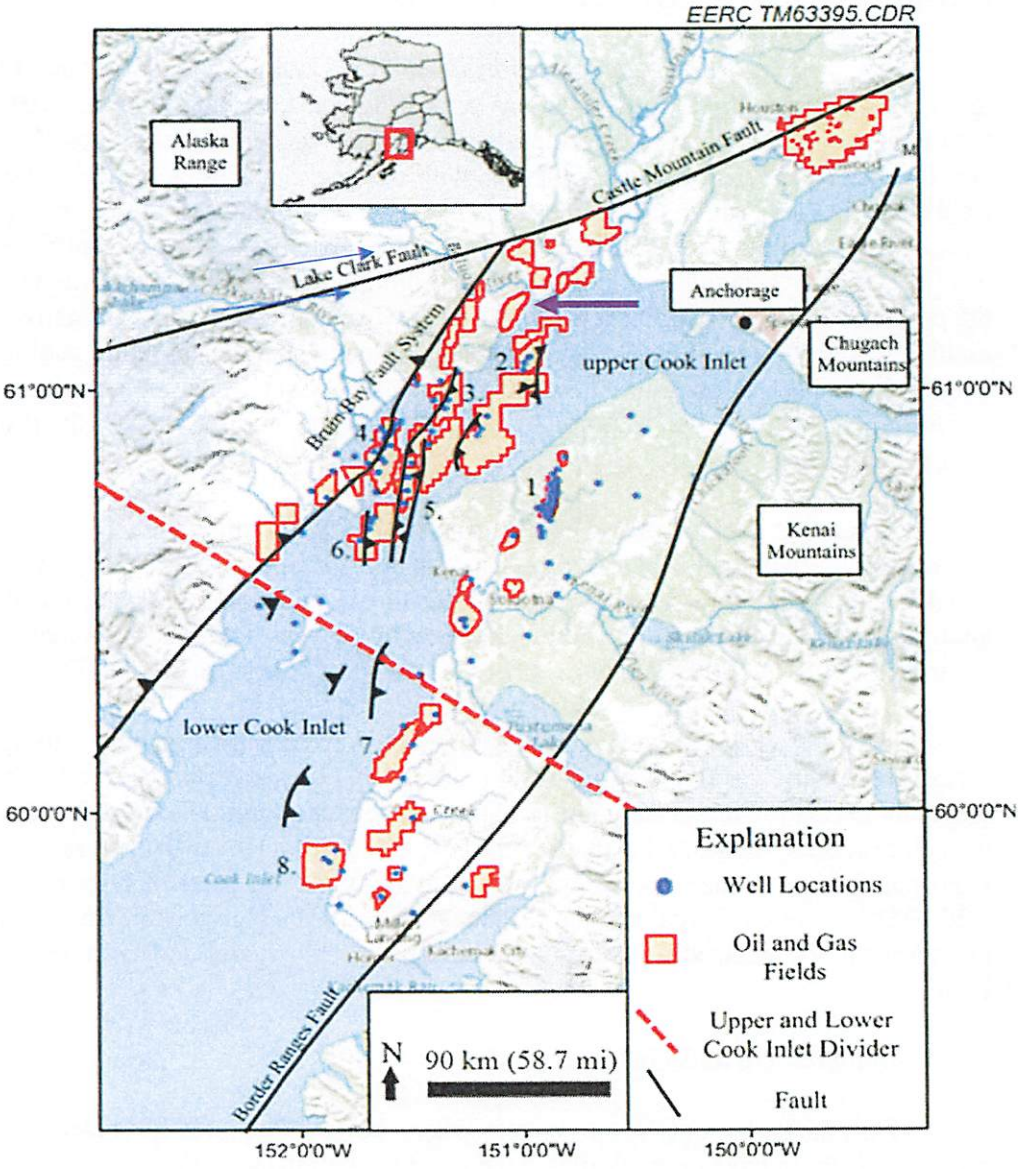

Figure 10. Location Map of Cook Inlet Basin with Beluga River Field Indicated by Purple Arrow (Pantaleone and Bhattacharya, 2021)

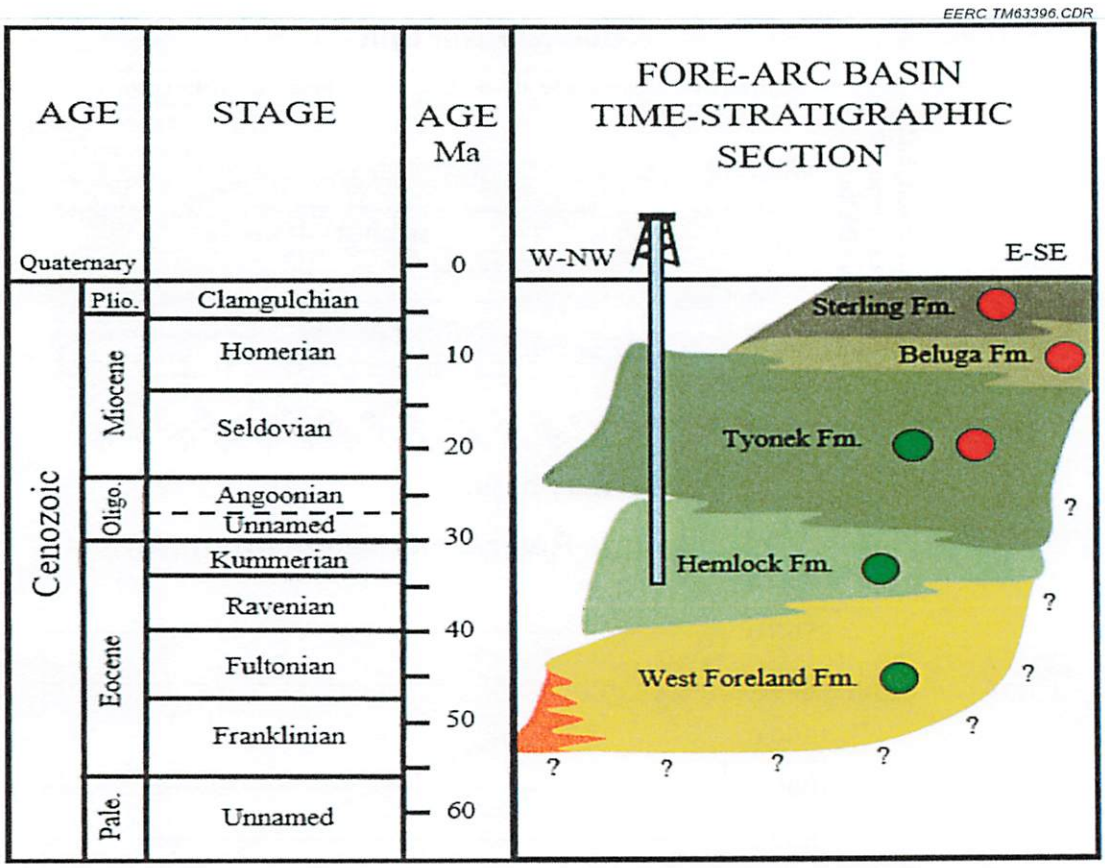

Figure 11. Chronostratigraphic and Petroleum System Chart for the Cook Inlet Basin (Pantaleone and Bhattacharya, 2021). Red and green dots note formations associated with natural gas and oil production, respectively.

Historical production data from the Beluga River Unit, Figure 12, show a strong p/z relationship that indicates the reservoir acts as a nearly static "tank" with no change in gas pore volume or formation damage occurring as gas is produced and reservoir pressure decreases. Assuming no significant reservoir damage occurs during production, volumetric calculations of the reservoir pore space available for CO_2 storage versus reservoir storage pressure is possible. This study assumed with CO_2 injection the reservoir will not exceed the original discovery gas reservoir pressure of ~ 2500 psi (Thomas and others, 2004). According to the same report, the volume of gas produced at depletion is approximately 1.3 Tcf of natural gas (Thomas and others, 2004), corresponding to a reservoir pressure of approximately 300 psi. The reservoir is located at an approximately 4000-foot depth. Assuming a surface temperature of approximately 60°F with a geothermal gradient of 15°F per 1000 feet results in a reservoir temperature of approximately 120°F. Under these reservoir conditions, natural gas has a density of approximately 7.8 lb/ft^3 (125 kg/m^3) compared to a density of approximately 0.044 lb/ft^3 (0.7 kg/m^3) under standard conditions (Unitrove, 2022) and results in a total reservoir volume available of approximately 7.3 Bcf.

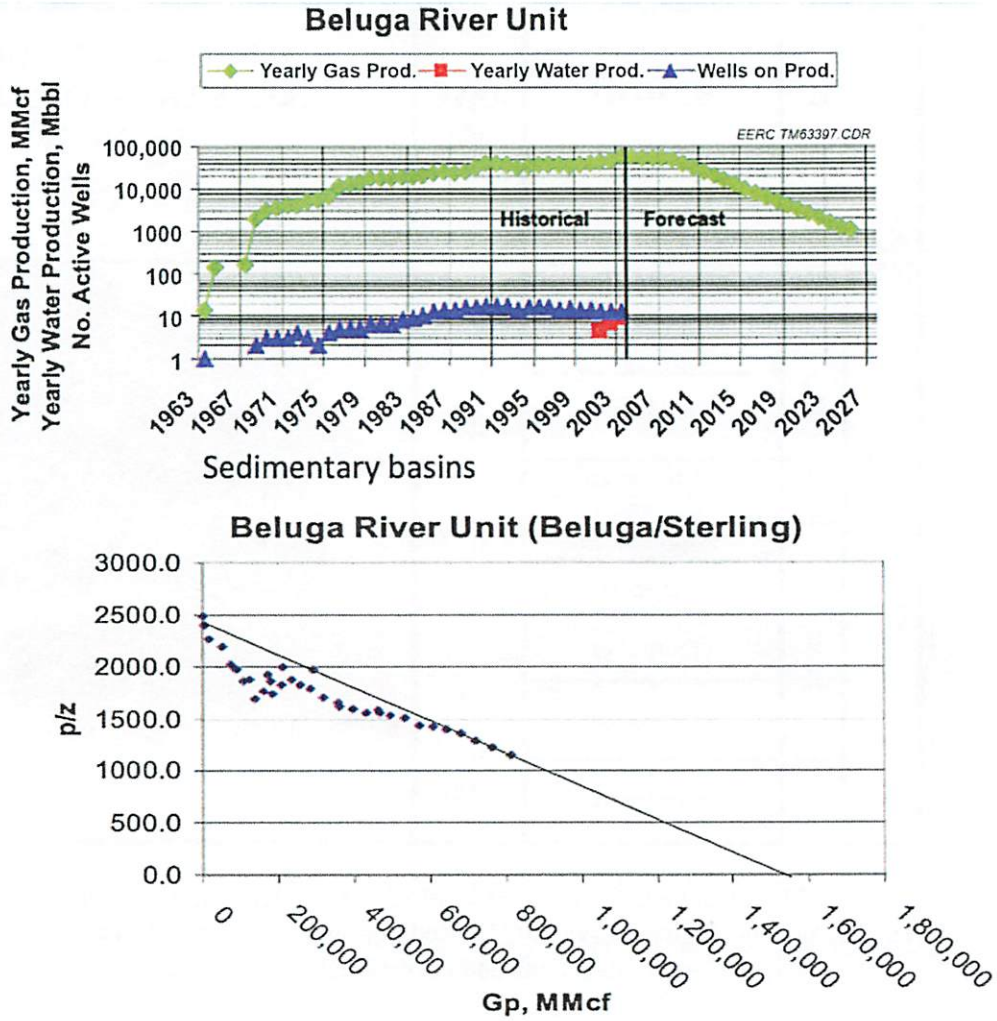

Figure 12. Beluga River Unit Production and Pressure History (Thomas and others, 2004).

Under the same reservoir conditions, CO_2 has a density of 46.8 lb/ft^3 (749 kg/m^3) (MegaWatSoft Inc., 2022). The same 7.3 Bcf of reservoir volume could be occupied by approximately 344 billion pounds, or 157 MMt, of injected CO_2. At CO_2 capture rates associated with a 400-MW gross power plant of 2.6 million metric tons per year, this provides approximately 60 years' worth of storage volume.

Achievable injection rates in a CO_2 injection well were estimated for the Beluga River gas field to determine whether it represents an economic target for CO_2 storage. To do this, the productivity index of the gas wells was converted to an approximate injectivity index. The Beluga River Unit for the month of December 2003 was approximately 4.8 Bcf from 13 production wells (Thomas and others, 2004). This rate is equivalent to 369 MMscf per month per well, or approximately 12 million standard cubic feet per day (MMscfd) per well. Reservoir pressure at this time is approximately 1200 psi. A conservative assumption is that the bottomhole

pressure of the producing wells is nearly atmospheric (14.7 psi), inferring a productivity index of 10,000 scf per psi of pressure drawdown.

Average per well rates of 12 MMscfd from the Beluga River Unit are confirmed in well-by-well historical production data from a 2017 Cook Inlet gas study conducted by PRA (Stokes, 2017). Some Beluga River Unit wells peaked at rates as low as 3.5 MMscfd, while others peaked at rates of 30 MMscfd or higher.

Using Darcy's law to convert natural gas production rates to CO_2 injection rates, the main differences are the density and viscosity of the fluids. Under reservoir conditions of 1200 psi and 120°F, natural gas has a density of 3.6 lb/ft^3 (57 kg/m^3) and a viscosity of 0.01 cP (Petrowiki, 2022). Meanwhile, CO_2 under the same conditions has a density of approximately 14.7 lb/ft^3 (235 kg/m^3) and a viscosity of approximately 0.02 cP (Fenghour and others, 1998). Under bottomhole injection conditions of up to 2500 psi, the density and viscosity of CO_2 may both be as high as 46.8 lb/ft^3 (749 kg/m^3) and 0.066 cP (Fenghour and others, 1998). Based on the differences in both viscosity and density, it is estimated that the mass flow rate of the CO_2 will be approximately twice that of natural gas, assuming a similar 1200-psi difference in pressure between the reservoir and well. This translates from roughly 500,000 lb of natural gas per day at 12 MMscfd to approximately 480 metric tons of CO_2 per day (or 175,000 metric tons per year) per injection well.

Finally, to inform the most likely peak performance of injectors, if the bottomhole pressure never exceeds the initial reservoir pressure of 2500 psi and the reservoir is depleted to 300 psi prior to CO_2 injection, that would imply an initial pressure difference between the well and reservoir pressure of 2200 psi. With this higher increased bottomhole injection pressure, initial injectivity of CO_2 injection wells in the Beluga River Unit is expected to average approximately 320,000 metric tons per year. This would require approximately one injection well into the Beluga River Unit per 25 MW of net electricity generation capacity. The number of injection wells varies depending on plant size as shown in Table 6.

The conservative injectivity estimate based on analog wells in the Beluga River Unit is strengthened based on an analog of a new CO_2 storage project. According to the storage facility permit for Project Tundra to store CO_2 in the Broom Creek Formation near Center, North Dakota, the Broom Creek Formation has an average permeability of 439 mD and estimated maximum CO_2 storage injection well rates of 2 MMt per year (Minnkota Power Cooperative, 2021). Meanwhile, the Sterling Formation of the Beluga River Unit was characterized as having an average permeability of 119 mD, which would result in an adjusted injectivity of approximately 500,000 metric tons per year under comparable injection limits (Levinson, 2013). However, this study does not push the bottomhole injection pressure to the same 90% of fracture propagation pressure as Project Tundra.

Local Saline Aquifers

Storage reservoirs in the Cook Inlet region are not limited to depleted oil and gas reservoirs. Stratigraphic columns and descriptions of the Cook Inlet region show that the volcanic bedrock in the region was formed in the late Triassic or early Jurassic period (U.S.

Department of Interior National Park Service, 2022; Buthman, 2017; Dallegge, 2003). Since the volcanic bedrock, multiple vertically stacked sedimentary reservoirs have accumulated in the Cook Inlet Basin. Fewer oil or gas accumulations are associated with the deeper reservoirs prior to the Paleogene period (Gillis, 2022), making the deeper Cretaceous and Jurassic period sediments a likely significant pore space resource.

The Cook Inlet sedimentary basin extending east of Skwentna may be amenable to CO_2 storage, but any potential storage site would require characterization to verify storage security and capacity. Geologic uncertainties are associated with this formation, including its local depth, thickness, and quality; the seal continuity and capacity of overlying strata; and the impact of seismic events, including the Castle Mountain fault, which requires further evaluation.

Since pipeline CO_2 transport to the Beluga River Unit would be an expensive capital project, geologic appraisal including an exploration well and/or a seismic survey to characterize local saline aquifers near the project site could provide valuable information and potentially significant project cost savings. Geologic appraisal of this type has been subsidized in other regions by the federal government in order to enhance CCS projects (Peck and others, 2020).

The Hemlock Formation, part of the Cook Inlet basin shown in the cross-hatched blue region in Figure 13, is considered one of the most prospective CO_2 storage locations in Alaska, sufficient for 1800 years of 200-MW-net power plant CO_2 storage (Pantaleone and Bhattacharya. 2020). In the Cook Inlet, specific reservoirs within the Hemlock Formation have been characterized, but outside of the explored oil and gas reservoirs there is significant uncertainty in the distribution of formation and reservoir properties (Ellett and others, 2022).

Unmineable Coal Seams

Finally, deep (>2600-ft) unmineable coal seams are a third possible storage resource in the area. Within the Cook Inlet Basin are multiple unmineable layers of coal distributed among the other sedimentary rock in the stratigraphic column (Dallegge, 2003). Since development of the unmineable coal seams of the Cook Inlet region have a similar or greater amount of uncertainty and cost compared to local saline aquifers, they are unlikely to represent a significantly more attractive target for CO_2 storage. Injection into saline aquifers has an established successful history compared to the relatively untested history of mineable coal seams.

Water Demand and Disposal for Power Generation and CCS

Zhai and others (2011) investigated water use at a pulverized coal-fired power plant with post combustion CCS, finding the amine carbon capture system water use similar to the stand-alone coal power plant. The biomass-coal power plant with CCS is thus assumed need a water permit twice that of the power plant alone. The power and CCS plant can be designed for zero water discharge employing water-saving measures, water cycling and reuse, and on-site evaporative ponds. Further study is needed to estimate water demand and disposal needs, if any.

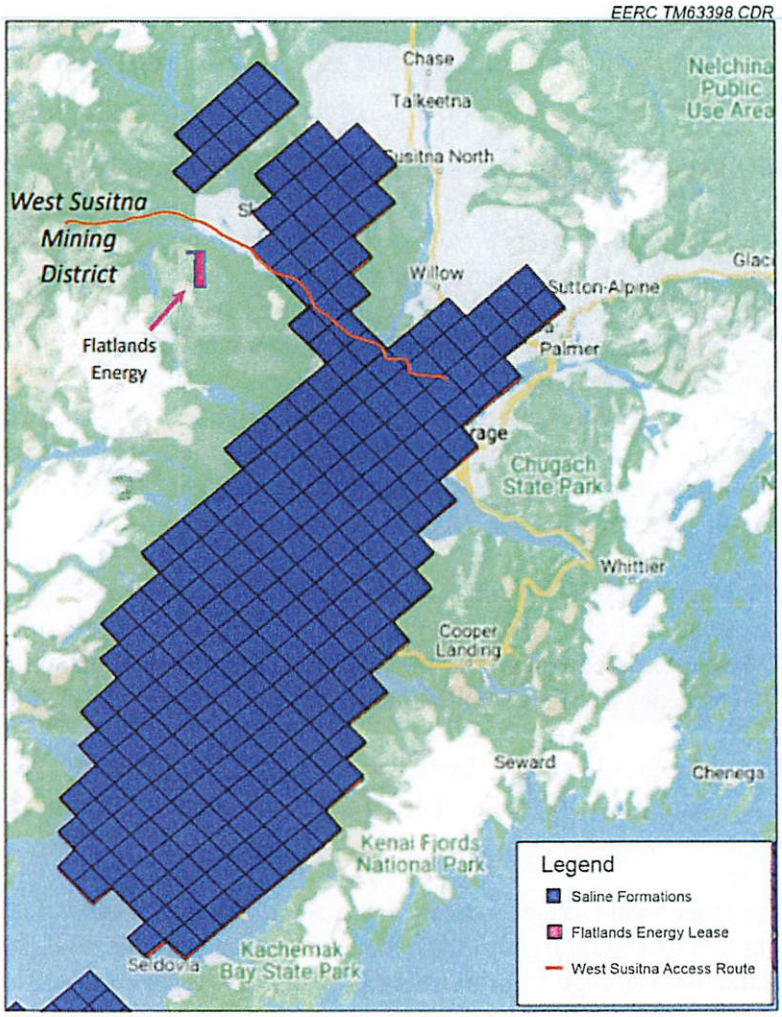

Figure 13. Cook Inlet Basin Saline Formations with West Susitna Access Road (https://simccs.org/maptool/).

If zero discharge is not possible, significant water disposal necessitates Class I wastewater disposal well(s) at or near the generation plant. This may make the case for an exploration well near the mine site for wastewater and/or CO_2 injection, to characterize the local geology of many stacked storage reservoir horizons. Local CO_2 injection would reduce CO_2 pipeline transportation costs, lowering the overall project cost.

CCS FINANCIAL ANALYSIS

CCS costs are evaluated for both biomass-coal and for natural gas fired power. All economic and financial analyses of the CCS systems presented in this report assume that the 45Q tax credits are the only source of revenue. Therefore, the assumptions of the duration and value of the 45Q tax credits are important to the economic analysis of this report and are discussed

below. These revenue assumptions are then fed into the CCS cost model to estimate the total cost to generate electricity and capture and store the CO_2 associated with electricity generation for the 30-year project life.

45Q Federal Tax Credits – History and Long-Term Expectations

The study team expects that CO_2 capture and storage 45Q tax credits may be extended (and perhaps increased again) during the project life, i.e., beyond the Inflation Reduction Act's (IRA's) current $85/metric ton and 12-year capture period. The base-case economic assumption for this feasibility study is that 45Q tax credits remain at $85/metric ton through the entire 30-year project life, referred to as the "30-year tax credit" scenario. As an alternate case, CCS economics are tested with 45Q credits that end after 12 years (consistent with current legislation) while CO_2 capture, transport, and storage continue for the full 30-year electricity generation facility life despite the lack of the tax credit in the out years. This case is referred to as the "12-year tax credit" scenario.

The history of 45Q, summarized briefly below, is the reason the 30-year tax credit scenario was chosen as the base case presented in the tables and figures of this report. Consistent with the 30-year tax credit scenario, the history of federal wind tax credits, which goes back to 1992, has been renewed and extended numerous times (Institute for Energy Research, 2019).

First introduced in 2008, Section 45Q of the U.S. Internal Revenue Code provides a tax credit for CO_2 capture and storage. The policy is intended to incentivize commercial deployment of CCUS.

The Bipartisan Budget Act of 2018 made the credits more valuable, increasing the tax credit from $20 to $50/metric ton for dedicated geologic storage and from $10 to $35/metric ton for associated CO_2 storage from EOR for projects that begin construction by January 2026.

In 2022, the IRA again expanded and extended the 45Q tax credit to $85/metric ton of dedicated CO_2 storage and $60/metric ton of associated CO_2 storage from EOR. The credit also addresses biologic sequestration and direct air capture (DAC) projects. The 2022 changes include a 7-year extension to qualify for the tax credit, meaning projects have until January 2033 to begin construction. The credit is currently available to qualified facilities for 12 years after they begin capturing and storing CO_2 (International Energy Agency, 2022b; BrownWinick Law, 2022).

Long-term expectations for continued 45Q tax credits through the project life (the 30-year tax credit scenario) are consistent with recommendations in *A Roadmap to At-Scale Deployment of Carbon Capture, Use, and Storage*, which outlines a pathway through three phases: activation, expansion, and at-scale deployment. (National Petroleum Council, 2019) The 2019 study "recommended expanding current policies to a level of ~$90/metric ton to provide incentive for further economic investment during the expansion phase." It also mentions that "achieving CCUS deployment at scale (i.e., additional 350 to 400 Mtpa) within the next 25 years will require substantially increased support driven by national policies.... Congressional action should be taken to bring cumulative value of economic policies to about $110 per tonne".

CCS Cost Model

A CCS techno-economic assessment cost model developed by the EERC was adapted for this analysis, which reflects costs as of May 2022 for Lower 48 construction that are uplifted with an Alaska cost differential. Results are provided for both a new biomass-coal fired power plant and a representative CEA-region gas-fired power plant to enable financial and carbon intensity comparisons between these systems.

For this study, CCS capital expenditures (CAPEX) and operating expenses (OPEX) were raised 25% to reflect possible Southcentral cost differentials, reflecting that Alaska statewide average building costs are 23% above the national average (estimationqs.com, 2022). For smaller CCS systems, 75-MW-net generation with CCS, a further 25% continency was added to CCS CAPEX only, given the limited ability to optimize costs with smaller construction projects. Further cost estimation work is needed.

The techno-economic assessment model includes these costs and benefits:

1) CO_2 Capture capital costs
2) CO_2 Capture OPEX
   a) Electricity use (pumps, compressors, refrigeration units)
   b) Fuel gas/heat use (mainly for amine regeneration)
   c) Water costs (mainly for cooling)
   d) Compressor maintenance/rebuilds/compressor oil
3) Injection well capital costs
4) Well maintenance
5) Pipeline capital costs
6) Pipeline OPEX
7) Pipeline and site monitoring, inspections, and testing
8) Seismic monitoring program
9) Site development costs
   a) Storage facility permit
   b) EPA monitoring, reporting, and verification (MRV) plan
10) Storage fees (per EERC)
11) 45Q tax credits

The Inflation Reduction Act increased 45Q tax incentives to $85/metric tonne for carbon storage projects that begin construction before January 1, 2033. In addition, billions of dollars of U.S. federal government loans and grants are available for advancing CCS and power projects, as discussed in Appendix A, government engagement and funding opportunities. For this study, government loans, grants, or other incentives outside of 45Q credits are not considered in the economics.

For this analysis, all CCS costs presented in tables and figures assume 30 years of revenue equivalent to 45Q tax credits from capturing and storing CO_2. This assumes that the current 12-year eligibility for 45Q tax credits will be extended, or CO_2 markets will become established to provide equivalent income to 45Q tax credits following the 12 years 45Q

eligibility, or other incentives will emerge to provide continued revenue for the remainder of the 30-year CO_2 capture facility life expectancy. Discussion is also provided for insight on the sensitivity of CCS and projected electricity costs assuming current 45Q legislation remains unchanged at current levels of 12 years of tax credit eligibility, no other revenue sources emerge, while the CCS system is operated for all 30 years of projected biomass-coal generation facility life, i.e., operates the last 18 years with CCS operational but without earning 45Q revenue.

Tax credit is given to the taxpayer or company that owns the carbon capture equipment placed into service in accordance with 45Q regulations. Therefore, if an electricity generation company owns the CCS equipment, excess tax credit generated from CCS could be applied to reduce the tax liability of the electricity generation side of the business, resulting in a net reduction in the cost of the electricity.

For this financial modeling, inflation was set to zero and the discount rate to 3%/year. This is effectively consistent with current National Institute of Standards and Technology (NIST) interagency report guidance (Kneifel and Lavappa, 2022):

- Real rate (excluding general price inflation): 3.0%
- Nominal rate (including general price inflation): 2.0%
- Implied long-term average rate of inflation: −1.0%

To test and validate the CCS financial model, carbon capture costs for a biomass-coal and natural gas power plant were compared with DOE NETL published estimates. For this benchmarking exercise, a $3.50/MMBtu natural gas price was used to be consistent with Lower 48 fuel prices. Transportation and shipping costs are excluded from these benchmarking estimates. CO_2 capture costs for a 300-MW-net power plant with CCS, a biomass-coal-fueled plant and natural gas-fueled power plant were estimated to cost $54.94 and $69.84/metric ton, respectively, to capture the CO_2 using the EERC CCS financial model. These are very close to published DOE NETL estimates: CO_2 capture cost for a subcritical coal-fired power plant is $56.20/metric ton and for natural gas combined cycle is $71.10/metric ton (U.S. Department of Energy National Energy Technology Laboratory, 2015). This benchmarking validated the CCS financial model for application in this study.

CCS Financial Results for Biomass-Coal Power Generation

Economic results are compiled in Table 6 for CCS associated with 25- to 500-MW-net with CCS power generation for a biomass-coal fired power plant. CAPEX includes the carbon capture plant, CO_2 transport pipeline, and wells to inject CO_2 into the storage reservoir. The plant has an annual operating CAPEX of 2.5% of the initial plant cost per year. OPEX for the CCS plant and pipeline are also major contributors to long-term project cost.

Table 6 shows only CCS system costs and benefits for clarity. Biomass-coal power plant costs are shown separately in Table 5. Two cases, highlighted red, have corresponding power plants with matching capacity for total cost of electricity calculations shown later.

Table 6. Biomass-Coal Power Plant CCS Financial Model Results for Various Plant Sizes
30-year Tax Credit Scenario. Two Sizes Highlighted Red have Corresponding Power Plant Costs for Total Cost of Electricity Calculations

	Units								
Power Plant Net Generation Without Carbon Capture	MW	33	67	100	133	267	400	533	667
Power Plant Net Generation with Carbon Capture	MW	25	50	75	100	200	300	400	500
Carbon Capture Plant Cost[1]	Net present US$MM	99.1	197.4	295.7	315.3	629.9	944.4	1259.0	1573.6
Carbon Capture Plant Ongoing CAPEX (30 years at 2.5% plant cost per year)	Net present US$MM	48.6	96.7	144.9	154.5	308.7	462.8	616.9	771.1
Carbon Capture OPEX (30 years)	Net present US$MM	162.4	275.8	389.2	502.5	956.1	1409.7	1863.2	2316.8
Pipeline Diameter, inches[2]	inches	6	8	12	12	12	16	20	20
Pipeline Capital Cost (75 miles)	Net present US$MM	68.8	77.0	97.1	97.1	97.1	132.8	171.8	171.8
Pipeline OPEX (30 years)	Net present US$MM	16.9	16.9	16.9	16.9	16.9	16.9	16.9	16.9
Well Costs[3]									
Total Number of Injection Wells (30 years)		1	2	4	5	11	22	43	105
Total Number of Storage Reservoir Monitoring Wells		1	1	1	1	1	1	1	1
Unit Cost of Wells	US$MM	10	10	10	10	10	10	10	10
Additional for Underground Source of Drinking Water (USDW) Monitoring Well and Monitoring Equipment	US$MM	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
Well Cost	Net present US$MM	20.6	30.6	45.1	56.1	108.4	185.8	315.4	628.3
Monitoring Costs	Net present US$MM	32.1	32.1	32.1	32.1	32.1	32.1	32.1	32.1
Seismic Costs	Net present US$MM	5.3	5.3	5.3	5.3	5.3	5.3	5.3	5.3
CCS Storage Facility Development Cost	Net present US$MM	6.3	6.3	6.3	6.3	6.3	6.3	6.3	6.3
Storage Fee Cost ($0.16/metric ton base)	Net present US$MM	1.2	2.4	3.7	4.9	9.8	14.6	19.5	24.4
Inspection and Testing Cost	Net present US$MM	3.5	7.0	14.0	17.5	38.5	77.0	150.5	367.5
Captured CO_2 (85% capacity factor, 90% CCS on-time, 95% capture rate)	MMt/y	0.22	0.44	0.65	0.87	1.74	2.62	3.49	4.36
Total CO_2 Stored (30 years, no discount factor)	MMt	6.54	13.08	19.62	26.16	52.33	78.49	104.65	130.82
CO_2 Captured (30 years, 3% discount)	Net present MMt	4.27	8.55	12.82	17.09	34.18	51.28	68.37	85.46
Power Generated (30 years, 85% capacity factor)	MWh	5,584,500	11,169,000	16,753,500	22,338,000	44,676,000	67,014,000	89,352,000	111,690,000
Net Present Power Generated (30 years, 85% capacity factor, 3% discount)	Net present MWh	3,648,354	7,296,708	10,945,062	14,593,415	29,186,831	43,780,246	58,373,662	72,967,077
Net Present Cost for CCS									
Total Cost for 30 years of Carbon Capture, Transport, and Storage	Net present US$MM	465	747	1050	1208	2209	3288	4457	5914
Total Cost for CCS per metric ton of CO_2 (30 years)	Net present US$/metric ton	108.76	87.46	81.93	70.70	64.62	64.12	65.19	69.20
Total Cost for CCS per MWh of Electricity (30 years)	Net present US$/MWh	127.39	102.44	95.96	82.81	75.69	75.09	76.35	81.05
Total Value of CCS with 30 years of 45Q Tax Credit ($85/metric ton)	Net present US$/metric ton	−23.76	−2.46	3.07	14.30	20.38	20.88	19.81	15.80
Total Value of CCS with 30 years of 45Q Tax Credit ($/MWh)[4]	Net present US$/MWh	−27.83	−2.88	3.60	16.74	23.87	24.46	23.20	18.50
Total Project Value with 30 years of 45Q Tax Credit ($85/metric ton)	Net present US$MM	−101.54	-21.03	39.35	244.36	696.61	1070.88	1354.53	1350.17

Assumptions:

[1] Net present costs assume 3% discount rate.

[2] Pipeline note: No additional pump stations required. Line sized for maximum 95% capture rate 100% on-time.

[3] Well count assumes only Beluga River Unit reservoir available. First-year wells accommodate 95% capture rate with 100% capacity factor and capture plant on-time. Later wells assume pressure buildup of average 85% capacity factor and 90% on-time of capture plant with 95% capture rate.

[4] Negative values add to electricity price, positive values lower electricity price.

Table 7. Natural Gas Power Plant CCS Financial Model Results for Various Fuel Gas Prices
30-year Tax Credit Scenario

	Units	$7.07 Natural Gas		$15 Natural Gas		$20 Natural Gas		$25 Natural Gas	
›wer Plant Net Generation Without Carbon Capture	MW	400		400		400		400	
›wer Plant Net Generation with Carbon Capture	MW	300		300		300		300	
ırbon Capture Plant Cost	Net present US$MM	213.8		213.8		213.8		213.8	
arbon Capture Plant Ongoing CAPEX (30 years at 2.5% plant cost :r year)	Net present US$MM	104.7		104.7		104.7		104.7	
ırbon Capture Plant OPEX (30 years)	Net present US$MM	422.9		627.7		764.2		900.7	
peline Diameter	inches	8		8		8		8	
peline Cap Cost (75 miles)	Net present $MM	77.0		77.0		77.0		77.0	
peline OPEX (30 years)	Net present $MM	16.9		16.9		16.9		16.9	
ell Costs									
›tal Number of Injection Wells (30 years)		3		3		3		3	
›tal Number of Storage Reservoir Monitoring Wells		1		1		1		1	
nit Cost of Wells	US$MM	10		10		10		10	
dditional for USDW Monitoring Well and Monitoring Equipment	US$MM	0.6		0.6		0.6		0.6	
ell Cost	Net present US$MM	35.0		35.0		35.0		35.0	
lonitoring Costs	Net present US$MM	32.1		32.1		32.1		32.1	
:ismic Costs	Net present US$MM	5.3		5.3		5.3		5.3	
CS Storage Facility Development Cost	Net present US$MM	6.3		6.3		6.3		6.3	
›rage Fee Cost ($0.16/metric ton base)	Net present US$MM	2.6		2.6		2.6		2.6	
spection and Testing Cost	Net present US$MM	10.5		10.5		10.5		10.5	
aptured CO_2 (85% capacity factor, 90% CCS on-time, 90% capture te)	MMt/y	0.45		0.45		0.45		0.45	
›tal CO_2 Stored (30 years, no discount factor)	MMt	13.44		13.44		13.44		13.44	
O_2 Captured (30 years, 3% discount)	Net present MMt	8.78		8.78		8.78		8.78	
›wer Generated (30 years, 85% Capacity Factor)	MWh	67,014,000		67,014,000		67,014,000		67,014,000	
›wer Generated (30 years, 85% capacity factor, 3% discount)	Net present MWh	43,780,246		43,780,246		43,780,246		43,780,246	
et Present Cost for CCS			**Without T&S[1]**		**Without T&S**		**Without T&S**		**Without T&S**
›tal Cost for 30 years of Carbon Capture, Transport, and Storage	Net present US$MM	915	729.7	1132	946.2	1268	1082.7	1405	1219.2
›tal Cost for CCS per metric ton of CO_2 (30 years)	Net present US$/metric ton	104.25	83.10	128.91	107.76	144.46	123.31	160.00	138.86
›tal Cost for CCS per MWh of Electricity (30 years)	Net present US$/MWh	20.91	16.67	25.85	21.61	28.97	24.73	32.09	27.85
›tal Value of CCS with 30 years of 45Q Tax Credit ($85/metric ton)	Net present US$/metric ton	–19.25	1.90	–43.91	–22.76	–59.46	–38.31	–75.00	–53.86
›tal Value of CCS with 30 years of 45Q Tax Credit ($/MWh)[3]	Net present US$/MWh	–3.86	0.38	–8.81	–4.57	–11.92	–7.68	–15.04	–10.80
›tal Project Value with 30 years of 45Q Tax Credit ($85/metric ton)	Net present US$MM	–169.03	16.66	–385.56	–199.87	–522.06	–336.37	–658.56	–472.87

sumptions:

ransportation and storage.

/ell count assumes only Beluga River Unit reservoir available. First-year wells accommodate 90% capture rate with 100% capacity factor and capture plant on-time. Later wells assume pressure buildup of average 85% capacity factor and 90% on-time of capture plant with 90% capture rate.

legative values add to electricity price, positive values lower electricity price.

CCS systems require electricity and heat from the power plant for CO_2 capture and transport, consuming 25% to more than 30% of the gross power plant generation. Since systems initially designed with CCS are more efficient than plants retrofitted for CCS, this study assumed 25% of plant power is used by CCS. A 100-MW power plant thus corresponds to 75 MW net with CCS power generation. The carbon capture OPEX estimate includes the cost of electricity and heat provided by the power generation plant. In a combined economic analysis, not shown here and depending on the project business model, the power plant may be compensated by the carbon capture plant for the electricity and process heat consumed by the CCS plant.

Table 6 lists net present costs for carbon capture, transport, and storage, total cost per metric ton of CO_2 stored, and total cost per MWh for a range of power generation sizes. Net present costs are calculated over a 30-year project life, consistent with traditional utility power cost calculations. As a result of the 30-year horizon used for utility-scale power generation, 30 years of CCS was also assumed in the economic estimates. In these cases, it was assumed that 45Q tax credits were extended or emerging revenue sources such as a regional CO_2 market or other incentives (e.g., sale of carbon credits) provide continued income for CCS operation for the 30-year facility life. Economics for the 12-year tax credit scenario are discussed below.

Carbon capture units such as the MHI KM-CDR process can be designed to capture carbon from relatively small-scale operations; however, per unit costs will be higher. To account for reduced economies of scale, this study increased carbon capture plant initial capital cost by 25% for plants designed to capture CO_2 from sources generating under 1 MMt per year of CO_2. This cost increase was, therefore, applied to 75-MW-net generation with CCS and smaller plants. For reference, a 25-MW biomass-coal power plant facility generates ~300,000 metric tons per year of CO_2.

The final rows in Table 6 show total net present cost for CCS and net present value including 45Q tax credit benefit assuming 45Q tax credits for all 30 years. These are reported in terms of US$ per metric ton of captured CO_2 and net present power cost US$ per MWh.

When net present cost drops below $85/metric ton, CCS adds economic value since costs are more than offset by tax credits. The CCS breakeven point is between 50- and 75-MW power generation with carbon capture, assuming 30 years of revenue equivalent to current 45Q tax credits. As will be discussed later, when assuming only 12 years of tax credits that are available in current legislation, the CCS capital cost and 30 years of CCS operations costs exceed the tax credits, and the cost of electricity with only 12 years of 45Q (followed by 18 years of operating the CCS plant without tax credits) is higher than the base cost of electricity without CCS. While it would be economically unattractive to operate the CCS plant without tax credits, a plant operator may still choose to do so.

Larger plants realize substantial economic gain from economies of scale. For example, the 300-MW plant net with carbon capture realizes a $20.88/MMt tax credit benefit if 30 years of 45Q tax credits are available. $1.1 billion in net present value beyond capital and operating costs is realized after 30 years of CCS operation and 30 years of revenue equivalent to current 45Q tax credits. As plant size increases, the most significant economy of scale realized is in the CO_2

transport pipeline. From the smallest- to largest-sized pipelines, 6 to 20 inches diameter, installed pipeline cost increases 2.5 times, but this, in turn, enables transporting 20 times the CO_2 mass.

Larger plant sizes, while realizing some economies of scale, do have an offsetting increase in cost when it comes to CO_2 storage. Assuming only a single storage reservoir, well costs increase in the larger CO_2 volume cases because of the need for more wells to maintain the injection rate as reservoir pressure buildup occurs. In the case of the Beluga River gas field, with an approximate storage capacity of 157 MMt, twice the number of injection wells will be needed to maintain injection by the time 79 MMt is stored. So, in the case of 400 MW of generation capacity (300-MW net with carbon capture), twice as many wells will be needed by 16 years into the project compared to at the start of injection. In cases over 400 MW generation, the large number of injection wells necessary to maintain injection rates into the Beluga River gas field cause the net present cost per metric ton of CO_2 stored to increase compared to smaller projects.

Reducing CO_2 transportation costs by co-locating CO_2 storage at the Flatlands Energy reserve instead of ~75 miles away improves project economics in all scenarios. Smaller power generation options particularly benefit economically. This presents an opportunity for project optimization: an investment to test local storage options to reduce CO_2 transportation costs. This may also simplify pore space acquisition by avoiding existing hydrocarbon-leased acreage and by judiciously selecting storage acreage with a single pore space owner, the State of Alaska, versus three owners in the currently producing Beluga River gas field (State, Federal, and Cook Inlet Region, Inc., CIRI) (ref. Figure 15).

The Flatlands Energy reserve is located within a sedimentary basin that may have a suitable saline aquifer for CO_2 storage. However, site geologic characterization using a geophysical seismic survey and at least one exploratory well would be required to determine local CO_2 storage capacity and suitable injectivity. For example, a stratigraphic test well, at an estimated $15 million, site-specific geologic studies, and study of local seismic and fault hazards could be needed. Federal funding via CarbonSAFE or other CCS funding may be able to offset a portion of these costs. Shortening the pipeline to 15 miles or eliminating the pipeline completely in the case of on-site storage saves $81 million to $114 million for a 75-MW-net power plant and $111 million to $150 million for a 300-MW-net power plant, respectively. These cost savings are equivalent to $6 to $9 per net present metric ton of CO_2 stored for the 75-MW-net power plant and $2 to $3 per net present metric ton of CO_2 stored for the 300-MW-net power plant, assuming 30 years of operation. If local storage proves to be available, project cost reductions make a smaller-capacity power plant attractive.

These financial results are sensitive to the discount factor since long-term value of 45Q tax credits decreases with increasing discount rate. For a 3% discount rate per NIST guidance, the breakeven plant size is between 50 and 75 MW with CCS.

CCS Financial Results for Natural Gas Power Generation

The CCS cost model was also applied to evaluate CCS for natural gas power generation with the same assumptions as the coal cases (30-year project life and 30 years of revenue equivalent to 45Q tax credits). Table 7 shows financial results for a 300-MW-net natural gas

power plant with CCS. CCS costs are estimated for the recent natural gas price ($7.07/MMBtu) and future low ($15/MMBtu), mid ($20/MMBtu), and high ($25/MMBtu) range of gas prices in light of supply shortfalls discussed above.

The CO_2 capture rate assumed is 90% from a natural gas plant compared to 95% assumed for biomass-coal fired power plants. Carbon capture is more difficult from a natural gas power plant because of the significantly lower CO_2 flue gas concentration compared to a biomass-coal plant, ~3-4% vs. ~14% CO_2 concentration, respectively (U.S. Department of Energy National Energy Technology Laboratory, 2015). The lower starting and ending concentration of CO_2 in natural gas power plant flue gas requires the injected amine CO_2 capture solvent to be significantly lower in CO_2 concentration, or "leaner," which requires higher amine regeneration temperatures. Higher amine required regeneration temperatures increase natural gas power plant CCS operating costs, especially with natural gas fuel price increases. While no commercial natural gas post-combustion flue gas CCS projects are currently operational, at least six are in advanced development with operational start dates of 2026 and beyond. (Global CCS Institute)

CO_2 captured rates and volumes from a natural gas plant are lower than a biomass-coal fired plant of similar power generation capacity, so natural gas plants have smaller CCS system sizes and costs to process and handle captured CO_2 per unit of electricity. On a per-ton basis, however, capture costs are higher for natural gas since costs are divided by a small number of tons CO_2. Natural gas capture costs in Southcentral, driven by locally high gas fuel price, are calculated to be much higher than in the lower 48 states or on the North Slope of Alaska which have low-cost natural gas fuel available to power the CCS processes.

For a natural gas plant, as shown in Table 7, the cost per ton of CO_2 ranges from $104 to $160/metric ton for capture, transport, and storage, increasing with fuel cost. Using Southcentral's fuel prices, in all cases the cost for natural gas CCS exceeds $85/metric ton, the 45Q credit amount, so CCS increases the electricity cost for natural gas power. Fortunately, while the cost per ton CO_2 is higher than the 45Q credit, relatively few tonnes of CO_2 are generated, so the cost increase per MWh is comparatively low for natural gas with 45Q tax credit revenue included. For similar reasons, CCS capture does not as dramatically increase natural gas-fired power cost as it would for biomass-coal fired power in the absence of 45Q tax credits.

Combined Project Cost: Low Carbon Biomass-Coal Power with CCS

Table 5 list biomass-coal power plant costs while Table 6 list corresponding CCS system costs. Table 8 brings these together for two project sizes: the 75- and 300-MW net with CCS power generation. Table 8 lists, in net present U.S. dollars, project total initial capital (bold), followed by operating capital cost and total expense costs for 30 years of operation. Note power transmission costs are excluded since customer location(s) is uncertain, e.g., industrial use or regional power grid. The customer is customarily responsible for power tie-in costs.

Table 8. Combined Project Cost, Low Carbon Biomass-Coal Power Generation with CCS, 30-yr

	Units	Power Plant with CCS	
Power Plant Generation Net with CCS	MWe net with CCS	75	300
Total Capital: Power Plant, CCS Plant, Pipeline, Well, Storage	Net present US$MM	**1149**	**3627**
Total Operating Capital Cost (30 years, 2.5% plant cost/yr)	Net present US$MM	464	1555
Total Expense Cost (30 years)	Net present US$MM	1657	6129
Power Plant Capital Cost (excluding power transmission)	Net Present US$MM	650	2229
Power Plant Ongoing CAPEX (30 years, 2.5% plant/yr)	Net present US$MM	319	1092
Power Plant OPEX (30 years)	Net present US$MM	1190	4567
Carbon Capture Plant Capital Cost	Net present US$MM	296	944
Carbon Capture Plant Ongoing CAPEX (30 years, 2.5% plant cost/yr)	Net present US$MM	145	463
Carbon Capture Plant OPEX (30 years)	Net present US$MM	389	1410
Pipeline Capital Cost	Net present US$MM	97	133
Pipeline OPEX (30 years)	Net present US$MM	17	17
Well Cost	Net present US$MM	45	186
Storage (monitoring, facility fees, inspection, and testing)	Net present US$MM	61	135

Biomass-Coal vs. Natural Gas Power Cost With and Without CCS

Figure 14 compares electricity costs for two natural gas power cases and for biomass-coal. Power costs are shown with and without CCS for comparison. For natural gas, the CEA G&T rate and a new combined-cycle natural gas plant are shown, both for a range of gas fuel prices. Biomass-coal is shown for two plant sizes, 75-MW-net and 300 MW-net with CCS. The natural gas fuel price range and the biomass-coal plant sizes described previously are shown here. In all these cases, CCS increases natural gas power cost, while CCS decreases biomass-coal fired power cost when assuming 30 years of revenue equivalent to 45Q tax credits.

When assuming the 12-year tax credit scenario, the 75-MW-net biomass-coal case has an average forecast electricity cost of $156 per net present MWh, while the 300-MW-net biomass-coal power plant with CCS has an average forecast electricity rate at $124 per net present MWh. These 12-year cases assume the CCS system operates for the full 30-year plant life. These findings are generally in line with DOE baseline studies, which estimated the cost of CO_2 capture for coal to be in the $50/metric ton range. If 45Q tax credits are earned only in the first 12 years, the net present impact of CO_2 capture on electrical costs in the following years are expected to be less $50/tonne but greater than zero.

The 12-year tax credit scenario with a 300-MW-net biomass-coal power plant has an average rate that is still less expensive than current CEA industry and retail rates and is comparable to the estimated average avoided cost in the CEA region of $114/MWh while delivering that power with greater stability, security, and superior environmental impact (lower CO_2 and methane intensity). Considering future natural gas prices, the 300-MW remains more cost-effective than new high-efficiency gas generation ($143/MWh at $15/MMBtu natural gas and increasing with fuel price). The only case in which gas could be more cost-effective than biomass-coal with CCS is when: (a) 45Q credits are not renewed after 12 years, and (b) 30-year natural gas prices for a new high-efficiency gas plant are guaranteed at or below current prices.

Low carbon biomass-coal power with CCS is predicted to be lower cost than natural gas power at comparable 300-MW-net generation capacity, especially for higher future natural gas prices. Since existing CEA natural gas power plants do not require CCS to operate, considering the shortfall of natural gas supply and the expectation of higher future fuel prices, and since CCS increases electricity costs, CEA may not add CCS to its natural gas power plants. Considering the case of adding CCS to a new high-efficiency combined-cycle gas plant, CCS still increases power cost and is not competitive with a new biomass-coal fired plant employing CCS.

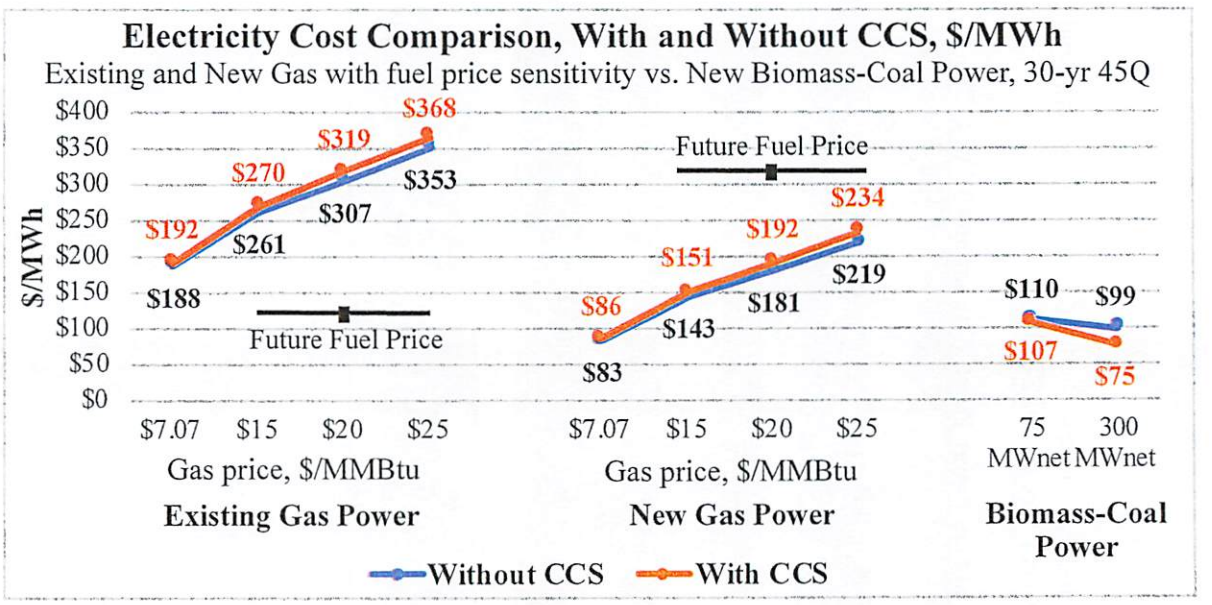

Figure 14. Electricity Cost Comparison, With and Without CCS, $/MWh
Existing CEA G&T Gas and New Gas Power with fuel price sensitivity
vs. New Biomass-Coal Power, 30-year tax credit scenario.

Biomass-Coal vs. Natural Gas: Generated Power Carbon Dioxide Intensity and Cost

As shown in Table 9, a low carbon biomass-coal power plant with CCS produces power at a much lower cost than the current CEA G&T rate for existing natural gas plants with or without CCS. Existing natural gas plants are unlikely to be retrofit with CCS, as CCS for natural gas is not required to operate and does not appear to be economically attractive. Table 9 shows power costs for natural gas at the gas price range low and high and for two biomass-coal sizes.

A biomass-coal power plant with CCS has less than half the carbon dioxide emissions of a natural gas generation station without CCS. Natural gas carbon dioxide emission intensity per unit of power generated for natural gas is 0.44 metric tons of CO_2 per MWh, more than double a low carbon biomass-coal power plant with CCS generating 0.20 metric tons CO_2/MWh or less. Note these carbon dioxide intensities are calculated for efficient gas power generation. For less efficient systems, natural gas can be as carbon dioxide intense as coal-fired-power without CCS.

Table 9. Carbon Dioxide Intensity and Power Cost: Natural Gas vs. Biomass-Coal Assuming 30-year Tax Credit Scenario

Source	Units	Existing Natural Gas Power Plant Without and With CCS				Biomass-Coal Power Plant with CCS	
Power Plant Size Before CCS	MW	400	400	400	400	100	400
Dispatched Power with CCS	MW	N/A[1]	300	N/A	300	75	300
Fuel Type	US$	$7.07/MMBtu without CCS	$7.07/MMBtu with CCS	$25/MMBtu without CCS	$25/MMBtu with CCS	$3.5/MMBtu Coal	$3.5/MMBtu Coal
EIA[2] CO_2 Intensity	lb/kWh	0.44		0.44			
Notes			90% capture		90% capture	95% capture	95% capture
Electricity Generated (85% capacity factor)	MWh/year		2,233,800		2,233,800	558,450	2,233,800
CO_2 Generated	MMt/year		653,000		653,000	765,000	3,060,000
CO_2 Captured	MMt/year		529,000		529,000	654,000	2,620,000
CO_2 Intensity	**metric tons/MWh**	**0.44**	**0.06**	**0.44**	**0.06**	**0.20**	**0.20**
Power Plant Electricity Cost	US$/MWh					110.4	99.3
CO_2 Capture Plant Net Present Value with 30 years of 45Q Tax Credits[3]	US$/MWh		−4.1		−15.0	3.6	24.5
Expected Electricity Cost	**US$/MWh**	**188**	**192**	**353**	**368**	**107**	**75**

[1] Not applicable.
[2] U.S. Energy Information Administration (2022).
[3] Negative values add to electricity price, positive values lower electricity price.

A further environmental advantage is that the Flatlands Energy coal extraction is expected to produce little if any methane since the coal is all located near to the surface, and any associated methane has long since desorbed because of exposure to air over geologic timescales. Meanwhile a natural gas plant has associated methane (natural gas) extraction and thus possible fugitive methane emissions. Methane (CH_4) is a powerful GHG that in 2018 contributed 17% of global anthropogenic emissions on a CO_2 equivalent basis (PCOR Partnership Atlas, 2021). Methane is a significantly more damaging GHG than CO_2, with 84 times the global warming potential (GWP) of CO_2 over 20 years and 28 times more GWP over 100 years (Rosselot and others, 2021). According to the International Energy Agency (IEA), new research shows global methane emissions from the energy sector may be understated by as much as 70% (International Energy Agency, 2022a). Fugitive methane emissions can include sources such as venting and flaring.

COMPETITOR ANALYSIS: NATURAL GAS FUEL SUPPLY OPTIONS

Prior discussion in the section *Power Cost Comparison* concluded LNG import would result in higher natural gas prices to Southcentral Alaska. There are other, in-state options available to deliver gas to the region being evaluated in response to the imminent shortfall. The delivered cost of gas and avoided cost of electricity were developed for each gas option and compared to biomass-coal power total cost.

Berkeley Research Group (BRG) and Cornerstone Energy Services prepared the *Cook Inlet Gas Supply Project Phase I Assessment Report* for the Alaska Utilities Working Group to assess the cost and availability of natural gas supply options, dated June 28, 2023 (BRG 2023). Black & Veatch (BV) prepared the *Chugach Gas Supply Option and Market Assessment* for Chugach Electric Association, Inc., filed August 11, 2023 with the Regulatory Commission of Alaska (RCA). The CEO for Enstar Natural Gas, the largest natural gas utility in Southcentral Alaska, testified to the State Legislature that future gas supplies will cost at least $16/MMBtu. (Enstar, 2024)

Considered together, the BRG study, the BV study, and Enstar testimony are in-line with expectations for higher future natural gas prices, with a range approximately consistent with the $15 to $25/MMBtu discussed above.

Electricity from a biomass-coal fired plant remains the lowest cost option, $.10 per kWh average, and with CCS would have an even lower cost, $.075/kWh, and emit one-half to one-quarter the carbon dioxide emissions of the current CEA fleet. While a new large, high-efficiency, combined-cycle gas plant could potentially produce lower cost electricity, this is *only true* if (a) gas prices remain at or below current values for 30 years; (b) a single turbine configuration is built, which is unlikely given the need for the Railbelt grid to have multiple turbines in order to provide firm energy supply reliability; and (c) the cost of installing and operating CCS is not included. Under every other scenario examined, the cost of electricity from a new gas plant exceeds the cost of electricity from a new biomass-coal fired power plant. Further, a new gas plant without CCS would have higher CO_2 and methane emissions than a new biomass-coal fired plant equipped with CCS.

Biomass-coal fired power generation is the lowest cost to customer solution relative to all gas supply options considered.

If a natural gas line can be financed and constructed from the North Slope, AGDC projects the Alaska LNG project in-state natural gas price delivered to Southcentral would be $4 to $5/MMBtu, resulting in CEA electricity prices of $160 to $169/MWh using the CEA G&T rate methodology in Table 2 (Alaska Gasline Development Corporation, 2022). In-state gas sales would be small compared to the gas exported as LNG, which contemplates delivering 20 million tonnes per annum LNG, equivalent to ~3 Bcf/d gas. Unfortunately for Alaskan customers, North Slope LNG export depletes known gas reserves in ~25 years, potentially re-creating the present in-state natural gas supply crisis for the next generation. As Cook Inlet LNG exports left the region gas-poor, might the same occur with North Slope major gas sales? The Alaska LNG project appears to rely on yet-to-find gas during the latter years of a 30-year export project desired by potential customers. No substantial North Slope gas discoveries have been made in Alaska since the Pt. Thomson field discovery in 1977, so yet-to-find gas may prove difficult to discover or not be of sufficient volume for in-state demand plus export demand for future generations of Alaskans. The projected cost of approximately $40B for the AGDC pipeline is an additional major barrier.

A smaller, in-state Alaska "bullet line" could be built primarily for in-state use. In-state gas use could include restarting the existing, small-scale LNG export facility mothballed on the Kenai Peninsula, as it would reduce overall fuel costs. Smaller scale export would not rapidly deplete North Slope gas resources, which could be supplied from Pt. Thomson alone for decades. A 2011 bullet line project cost was estimated at $7.5 billion, down from a prior estimate of $11.8 billion. These estimates require inflation adjustment to today's dollars.

Yet-to-find gas from the Cook Inlet Region, which has not seen exhaustive exploration, would be expected to deliver gas at higher than recent natural gas prices. The Cook Inlet region is viewed as a high-cost, high-risk exploration area that is seeing limited exploration activity but active infill drilling and development (Thomas, 2004).

In comparison, a biomass-coal fired plant supplies electricity at a lower cost, $75/MWh with CCS, for the 30-year tax credit scenario. This rises to an average of $124/MWh in the 12-year tax credit scenario. A biomass-coal fired plant also has ~ 150 years of known reserves for a 400-MW plant from Flatlands Energy's currently explored lease areas alone.

GOVERNMENT ENGAGEMENT AND FUNDING OPPORTUNITIES

To accelerate CCUS deployment, the U.S. federal government is increasing CCUS project funding, mostly through DOE. Some of the potentially applicable funding opportunity announcements are listed in Appendix A: Government Funding Opportunities. The project should consider which, if any, FOAs, loans, or grants to apply for in future phases. While this information is dated, it is provided to illustrate the nature of potential FOAs.

PERMITTING, ENVIRONMENTAL, AND REGULATORY CONSIDERATIONS

Mine permitting is expected to follow all required regulatory processes including public comment periods, agency reviews, and mitigation of environmental impacts. From application to record of decision is expected to take approximately 2 years. The mine could then commence operation extracting coal in 1-2 years, i.e., prior to CO_2 storage facility permit approval.

Mine, road, power plant, carbon capture plant, CO_2 pipeline, and power transmission line permitting requirements are considered to be well understood and typical for this scale of project. The National Environmental Policy Act (NEPA) process, required to acquire federal permits, is likely to take 2 years, plus another 3 months to issue a record of decision (ROD). This project qualifies for the federal FAST-41 permitting process (described below), which can compress the permitting timeline.

The EPA aspires for the CO_2 storage permitting duration to take 2 years, but has taken 3 to 5+ years for other projects. The Alaska Legislature authorized the AOGCC in 2023 to seek Class VI CO_2 injection permitting primacy from the EPA, which if approved devolves permitting authority to the State, with continued EPA oversight, to regulate Class VI CO_2 injection well permits. Other states with primacy have approved carbon storage projects in as little as 8 months. Primacy transfer from the EPA would likely take ~ 2 years. The Legislature is considering new CCS omnibus carbon storage legislation for State lands, HB50 and SB49, with at least 14 committee hearings to date. This report considers two CO_2 storage permitting timelines, EPA and State, in the Timeline section of this report.

The EPA was consulted regarding approval expectations for a new coal fired plant. In summary, under the current 2015 EPA point source/generator emitter rule, as long as CO_2 emissions are kept below a certain carbon intensity, detailed below, a new coal plant of any size can be permitted, and permitted without CCS or hydrogen fuel switching being required. To achieve permittable carbon intensity, abatement may be necessary, e.g. biomass, CCS, or both. The 2023 EPA proposed rule does not change this nor does it require CCS to be added. Large existing coal plants that undertake major modifications have to implement CCS or switch to hydrogen as a condition of modifications. New coal plants that meet the 2015 rule do not have to add CCS or hydrogen. For gas-fired plants, the 2023 proposed rule requires all large gas plants, existing and future builds, to move to CCS or hydrogen fuel switching by 2040 or be shut down.

U.S. climate envoy John Kerry stated, "Now is the time for all of us to join together and take a more critical step - there should be no more permitting of any new unabated coal-fired power anywhere in the world. Period," according to a transcript of his speech at an event in Edinburgh. (Reuters 2023) Regarding abatement, the International Energy Agency stated, "Bringing down emissions from the existing global coal fleet requires a broad-based and dedicated policy effort. In our scenarios, coal plants are either retrofitted with CCUS, reconfigured to be co-fired with low emissions fuels such as biomass … repurposed … or retired." (IEA 2023)

Current and proposed U.S. Federal policy regarding coal fired power, the Center for Climate and Energy Solutions states the following (*italicized*). Note per Table 1, the proposed power plant is estimated to emit 2,229 lbs CO_2/MWh without biomass or CCS.

"In December 2018, EPA proposed GHG emission regulations for new, modified, and reconstructed power plants. [Federal Register 2018] The proposed rule would replace EPA's 2015 "Carbon Pollution Standard for New Power Plants" which established New Performance Source Performance Standards (NSPS) to limit carbon dioxide emissions from fossil fuel-fueled power plants. The 2015 rule determined new coal power plants can emit no more than 1,400 pounds CO_2/MWh, which almost certainly requires the use of carbon capture and storage (CCS) technology.

The proposed 2018 rule would:

- *Set the best system of emissions reduction for newly constructed large units equivalent to a super-critical coal plant, which has an emissions rate of 1,900 lbs CO_2/MWh and would set the best system of emission reductions for small units to 2,000 lbs CO_2/MWh.*
- *Set separate performance standards for newly constructed and reconstructed coal refuse-fired units at an emissions rate at 2,200 lbs CO_2/MWh.*
- *Revise the standards of performance for reconstructed power plants to be consistent with the emission rates of newly constructed units.*

This standard was adopted under Section 111(b) of the Clean Air Act, which applies to new, modified, and reconstructed power plants, and requires EPA to set a numerical performance standard based on the best available technology that has been adequately demonstrated. States have little flexibility in applying the standard." (C2ES)

Three permitting matrices were developed, located in Appendix B. Table B-1 is a NEPA and federal permit matrix. Table B-2 is a State permit matrix. Table B-3 is a lands, right of way, and pore space leasing obligations and permit matrix. These tables address many of the major requirements but are not exhaustive.

Lands and Right of Way

Placement of CO_2 transport and storage infrastructure will require a right of way from affected landowners. Landowners on approach to the depleting Beluga River gas field include the State of Alaska, CIRI, and Chugach Electric Association. A CO_2 pipeline and power transmission line from the plant site to the Beluga River site could be co-located within the Donlin pipeline right of way (ROW) through approval from ADNR with a letter of nonobjection from Donlin. If Donlin objected to this infrastructure being placed within its ROW, then the CO_2 pipeline and power transmission line could be placed outside of the Donlin ROW in an abutting ROW paralleling Donlin's ROW.

Geologic Pore Space Leasing – Landownership and Availability

Acquiring the legal right to access and use the pore space of a geologic formation for permanent CO_2 storage is required for commercial CCS projects (Peck and others, 2022). The owner(s) of the overlying surface estate and the mineral estate are each important considerations for CO_2 injection and storage. In Alaska, a hydrocarbon lease does not convey pore space

ownership. The State's proposed legislation provides ownership certainty for pore space leasing and a carbon storage regulatory framework in Senate Bill 49 and House Bill 50. These bills define certain rights for existing oil and gas operators for pore space leasing within an existing hydrocarbon lease, akin to a first right of refusal. Conflicts or shared interests between an oil and gas leaseholder and the carbon storage pore space leaseholder may arise, including project upsides for working with the producing field owner, e.g., rather than abandoning certain equipment upon cessation of production, some may be repurposed for the storage project.

The State, Federal government, and CIRI hold hydrocarbon leases in the Beluga River Unit, as shown in Figure 15.

Geologic Storage, Enhanced Oil Recovery, and 45Q Tax Credits

This project assumed the Beluga River gas field for storage. Evaluation of other storage options in the area is recommended, including other depleted fields and local and regional saline aquifers which may provide economic storage alternatives. The ARCCS project will determine carbon storage volume available in the area.

CO_2 storage can be dedicated storage in deep saline formations or storage through EOR. Two different tax credit values are available. The EOR-related 45Q tax credit is $60/metric ton of CO_2 stored; while in saline formations, the 45Q tax credit is $85/metric ton of CO_2 stored. Current legislation provides 12 years of 45Q tax credits, but, as discussed in section *45Q Federal Tax Credits – History and Long-Term Expectations,* these may be extended and/or increased in value to incentivize additional, large industrial CCS/CCUS project operations.

Geologic data are needed to characterize potential storage sites, develop storage permit applications, and prove to the regulating authority the storage reservoir is suitable for permanent storage and CO_2 will not escape the intended formation. It can be challenging to prove complete geologic containment of CO_2, especially in a seismically active region away from well-characterized oil and gas reservoirs, including the likely vast, but less well characterized, saline aquifer storage resources of the Cook Inlet region. The primary target of CO_2 storage in a depleted Cook Inlet gas field has the advantage of considerable geologic data and certainty of a secure storage resource once well integrity of existing well penetrations into the storage formation are ensured.

Permitting geologic storage at the Beluga River gas field, nearly depleted by production, has the advantage of a historic data set and understanding of the reservoir. Estimates have placed its remaining productive life at less than 10 years, i.e. by 2033. The presence of natural gas confirms the presence of a secure seal, and the field has proven, enduring storage capacity.

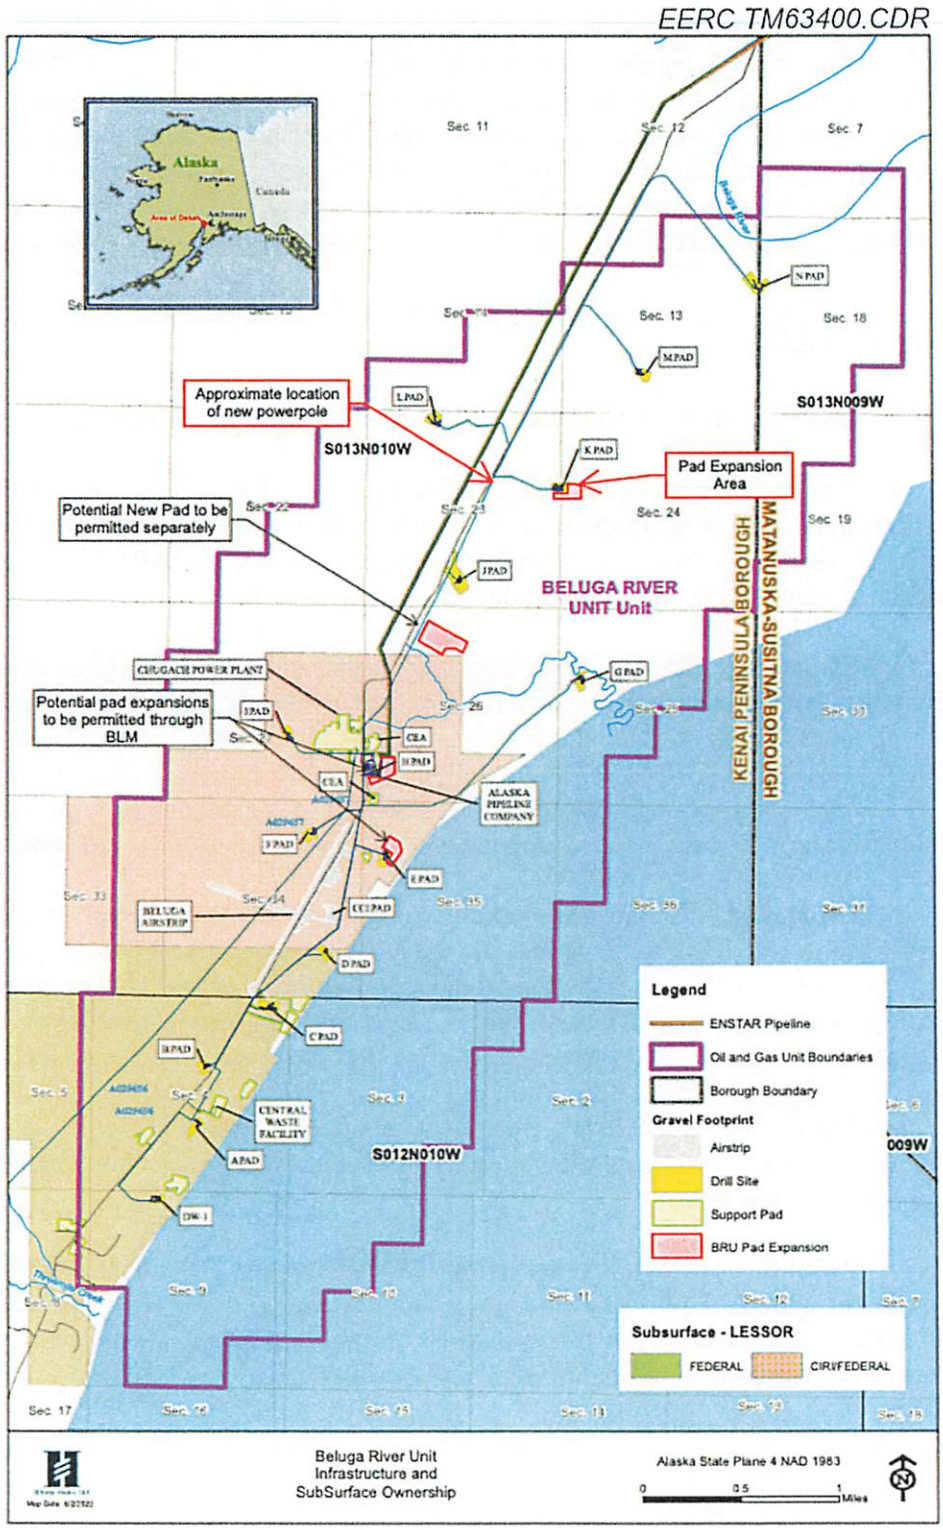

Figure 15. Beluga River Unit Infrastructure and Subsurface Lease Ownership (Alaska Department of Natural Resources, 2022b).

Class VI CO_2 Injection Well Permitting, EPA, and the State

Jurisdiction for Class VI CO_2 injection wells in Alaska is with the EPA. The EPA is processing 64 carbon storage applications, but has permitted a handful of CO_2 storage wells to date; one took 3 years and the other 5 years. (EPA Permit Tracker) To date, no applications have been made in EPA Region 10, which includes Alaska, for a carbon storage project.

The Alaska State Legislature approved in 2023 the Alaska Oil and Gas Conservation Commission (AOGCC) to seek Class VI primacy from EPA. The Governor proposed in 2023 Senate Bill 49 and House Bill 50 that would, with Legislative approval perhaps in 2024, establish Alaska's regulatory and legal carbon storage framework.

The AOGCC has begun preparing application for primacy. Once submitted, EPA review is expected to take at least 2 years, so the State may gain primacy by ~ 2026. Projects can apply simultaneously to EPA and the State, as projects have in Louisiana, which may enable Class VI permitting for applications filed in 2024 (if any) to be approved as early as 2026. In addition, Class VI permits can transfer from EPA to the State if primacy is achieved.

Class VI Injection Well Permit Criteria

If the State gains primacy, its regulations can be no less stringent than those of EPA in the protection of underground sources of drinking water. Class VI permit criteria include:

- Permitting
- Geologic site characterization
- Area of review (AOR) and corrective action
- Financial responsibility
- Well construction
- Operation
- Mechanical integrity testing (MIT)
- Monitoring
- Well plugging
- Postinjection site care (PISC)
- Site closure

Regulations address the unique nature of CO_2 injection, including:

- Relative buoyancy of CO_2
- Subsurface mobility
- Corrosivity in the presence of water
- Large injection volumes anticipated at geologic storage projects

Expedited Federal Review under FAST-41

The Fixing America's Surface Transportation (FAST) Act establishes coordinated oversight procedures for infrastructure projects being reviewed by federal agencies. It is intended to facilitate early consultation and coordination among government agencies, increase transparency through public timetables, and increase accountability through consultation and reporting on projects (Energy.gov, 2022). To be eligible, a proposal must be subject to NEPA; likely to require a total investment of more than $200,000,000; and not qualify for abbreviated authorization or environmental review processes under any applicable law.

Projects establishing CCS infrastructure may qualify for FAST-41 status and expedited federal review. A CCS project seeking to establish a CO_2 transport pipeline (or regional gathering line) for storage in Cook Inlet may be deemed critical transportation infrastructure, similar to other FAST-41 pipeline projects. Applying for FAST-41 status may help to expedite permitting for this project.

Monitoring, Reporting, and Verification Plan (MRV) for Sequestered CO_2

An EPA greenhouse gas reporting program (GHGRP) (40 CFR Part 98) approved MRV Plan is required by the IRS in order for CCS projects to receive the 45Q tax credit. Regardless of whether the State gains primacy for Class VI well permitting, the EPA maintains oversight for the monitoring, verification and accounting of the stored CO_2. The CCS techno-economic cost model (see CCS cost model discussion and Table 6) includes MRV costs for the life of the project, including seismic acquisition, monitoring well, State monitoring storage fees, inspection, and testing costs.

Area Injection Order and Plan of Development

If the project progresses under EPA jurisdiction, then a plan of development is expected to be required for approval by the State Division of Oil and Gas (DOG), but no area permit by the Alaska Oil and Gas Conservation Commission (AOGCC) is required. If the State gains Class VI primacy from the EPA, then the project must seek an AOGCC area injection order approval for underground injection of fluids (CO_2 in a nongaseous state) for an area basis rather than for each well individually, in accordance with Alaska Administrative Code (AAC) Title 20, § 25.460. Injection of CO_2 into a depleted gas field is also likely to require a plan of development (POD) submitted to the DOG and AOGCC to ensure compliance with State laws.

PROJECT TIMELINE

Power generation and CCS is expected to commence 6 to 7 years from the start of a FEED study, which is year 00 in Figure 16. The schedule reflects 30 months for project engineering. Timelines are aligned so completion of all construction occurs simultaneously.

Permitting the power and capture plants and CO_2 transport can begin 6 months after engineering starts. Permitting for the mine and power plant takes 2 years plus 3 months to issue the record of decision. Coal mine and road construction take 36 months. Flatlands Energy has most environmental baseline data gathering underway or completed and can move into the permitting process as soon as project development plans are finalized.

Carbon storage permitting is estimated to take 4 years with EPA, which has jurisdiction, completed by year 6. If the State achieves Class VI primacy or the EPA approves rapidly, it reduces CO_2 storage permitting from 4 to 2 years, i.e., end of year 4 as shown.

Pipeline and electric power transmission line construction take 12 to 18 months, as do injection well drilling, completion, and tie-in, including site preparations and production well abandonment. These activities can begin earlier if needed. Winter access roads have been built annually in recent years and would be available to support the project during construction. The regional access road WSAR is already in the pre-permitting process with the Alaska Department of Transportation and is expected to be available to support operations.

The schedule reflects 3 years for power plant and CCS plant construction.

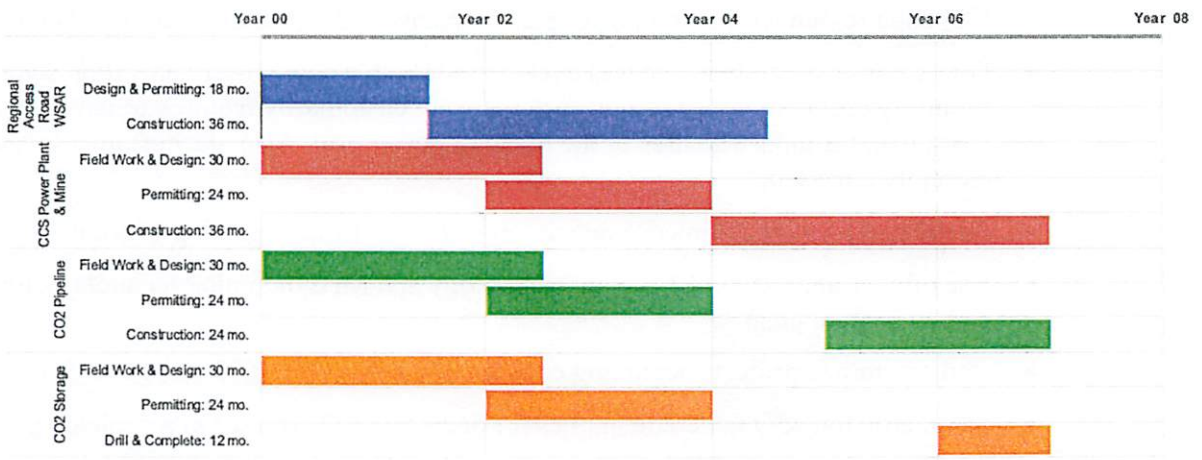

Figure 16. Project Timeline (created with Vertex42©).

KEY STUDY ASSUMPTIONS

Key assumptions include the following:

- 85% power plant capacity factor – represents how much capacity is used by customers on an average basis and includes all downtime, scheduled and unscheduled.
- 90% CCS plant uptime.
- 95% carbon capture rate for biomass-coal plant and 90% for natural gas plant.
- All economics assume 30 years of CO_2 capture, transport, and storage operations expenses during the expected life of the electricity generation facility.
- Power and carbon capture plants are located at the mine, with transmission of CO_2 and electricity along the permitted Donlin pipeline and Beluga River pipeline corridors to the nearly depleted Beluga River gas field and grid intertie.
- CCS capital and operating expenditure costs were uplifted 25% above the CCS model cost (which is based on the contiguous U.S. states) to reflect possible Alaska construction cost differentials.
- The capital cost estimate uncertainty range for this study is -30% on the low side to +50% on the high side, consistent with a Class 5 Conceptual Engineering estimate.
- To account for reduced economies of scale, carbon capture plant initial capital costs were increased by an additional 25% for 75-MW-net generation with CCS and smaller plants.
- Number of wells and CO_2 capture and pipeline facilities sized to handle maximum 95% CO_2 capture rate with 100% power plant capacity and 100% CO_2 capture plant on-time.
- Power transmission line cost was excluded for both a new power generation station and for utility cost comparisons; new customers are customarily required to pay for these costs, e.g., for industrial uses or the regional power grid. Also, the customer location(s) is currently uncertain.
- Power plant would commence operations ~ 7 years from beginning of engineering.
- Use of well-understood CFB plant technology and MHI or similar technology for the carbon capture plant.
- Carbon storage projects beginning construction before 1/1/2033 can earn 45Q tax credits.
- $85/metric ton 45Q tax credit applies for dedicated CO_2 storage in a depleted gas field.
- Economics in tables and figures assume the most likely 30-year tax credit scenario because of expectations of growing carbon (CO_2) markets, extended or enhanced 45Q tax credits, or creation of new incentives to ensure continued CCS operation beyond current 12-year 45Q eligibility.
- Sensitivity economics are calculated for the 12-year tax credit scenario, as per current legislation, with 30 years of continued CCS operations.
- 3% discount rate, consistent with NIST guidance.

CONCLUSIONS

This study concludes a new biomass-coal power plant with CCS in Southcentral is attractive and can deliver affordable, reliable, clean, long-term energy security.

For affordable energy, the biomass-coal generation project would:

1) Be competitive economically with existing utility electricity rates and materially lower than future higher-priced gas provided locally, from imported LNG, or the North Slope.
2) Decrease the cost of electricity to the Railbelt, and through Power Cost Equalization, decrease the cost of Rural electricity across the State, while adding power capacity and providing in-state sourced fuel security.
3) Outperform alternative new firm power projects that appear more costly and challenging timewise, per the recent UAF report, *Alaska's Railbelt Electric System: Decarbonization Scenarios for 2050* for micro-nuclear and the Susitna Watana Dam. (Cicilio 2024).
4) Be competitive with theoretical new natural-gas fired baseload generation and materially lower cost than theoretical new gas generation with future higher-priced gas.
5) For larger biomass-coal plants, realize substantial economic gain from economies of scale, especially for CO_2 transportation costs.

For reliable energy, the biomass-coal generation project would:

1) Diversify the regional fuel supply with respect to power generation.
2) Provide new, firm baseload power for new industry consumers, the Railbelt grid, or both.
3) Enable replacement of aging regional power equipment, and result in lower cost, lower emissions power generation.
4) Outperform new gas supply options available to Southcentral, which have risks of supply shortfalls, supply chain uncertainties, and material cost uncertainties.
5) Outperform wind and solar power, which may to have a valuable but limited role to play given the need for dispatchable base load power when the weather is not amenable for wind or solar power generation. This is shown by the NREL analysis that concluded significant fossil-energy power generation would be retained to provide energy security.

For clean energy, the biomass-coal generation project would:

1) Be environmentally superior to current natural gas power-generating stations by inclusion of CCS. Biomass-coal power with CCS generates one-half to one-quarter the CO_2 emissions and has lower fugitive emissions of methane, a powerful greenhouse gas.
2) Through biomass co-firing, reduce or realize net-zero or better carbon emissions with thoughtful biomass supply chain management.
3) Achieve net-zero or better carbon emissions while increasing regional food security through beneficial use of CO_2 and heat for greenhouse.

For long-term energy security, the biomass-coal generation project in Southcentral would have:

1) The Flatlands Energy site with sufficient proven coal reserves to supply electricity for generations, sufficient to enable low to reasonable extraction ratios for 150 years or more.

2) Substantial biomass resources regionally, including spruce bark beetle kill.
3) The storage site selected in this study, Beluga River Unit gas field, has estimated capacity for 60+ years for a 300-MW-net biomass-coal fired power plant with CCS.
4) Other possible carbon storage formations are available regionally that the ARCCS Project will evaluate, but these may require additional geologic data gathering.

Other cost-related conclusions include:

1) Adding CCS to biomass-coal generation lowers electricity cost, due to positive 45Q tax credit revenue.
2) Adding CCS to natural gas power generation increases electricity cost, due to 45Q tax credit revenue insufficient to cover costs of CO_2 capture and sequestration.
3) Biomass-coal power cost without CCS is lower cost than natural gas without CCS.
4) Biomass-coal power cost with CCS is lower cost than natural gas power with or without CCS.

RECOMMENDATIONS

Considering the imminent regional natural gas shortfall and high cost for new gas, diverse energy sources should be sought for the Railbelt and Southcentral.

Moving a low carbon biomass-coal with CCS power generation Project forward to its next step is warranted based on the favorable findings in this Feasibility Study, using technologies ready for commercial industrial deployment.

An expeditious decision to proceed is recommended, as the energy supply crisis becomes more challenging each passing month, seasonal fieldwork for permitting-related data collection is short, service providers are busy, and the 45Q tax incentives for carbon storage, worth an estimated $2.7B for a 400MW plant, are conditional upon CCS facilities construction commencing by December 31, 2032.

Specific recommendations include:

- The State should establish the legal and regulatory framework to enable carbon storage, i.e., progress bills currently with the Legislature into law.
- The AOGCC should seek and gain Class VI permitting primacy from the EPA.
- UAF should perform the Alaska Railbelt Carbon Capture and Storage (ARCCS) Project, which is contingent on State Legislative approval of matching funds that are included in the associated UA budget submission.
- The State and the Regional utilities should form a power purchasing buyers group and confirm the amount of firm power to be purchased which is required to meet both Railbelt and prospective mining development needs such as the Donlin Gold

project. The Utilities working with the State should enter into Power Purchase Agreements ideally through the Alaska Energy Authority which will enable Project funding of the appropriately sized power plant, perhaps along the lines of the successful Bradley Lakes Power project previously negotiated through the AEA.

- Enabling legislation for the Alaska Energy Authority should be amended to enable the Authority to enter into firm power purchase agreements with independent power producers and to enter into power sale agreements with electric utilities and industry as well as to enable the Authority to finance or support the financing of firm power purchase agreements.

- The Project owners, the State, and Utilities should jointly seek funding, including U.S. DOE loans and grants for FEED and/or CCS demonstration funding, which may be available in amounts as high as $500M.

Public investment in the Project will foster transparency, build trust, and promote alignment among stakeholders, which is crucial for project acceptance and long-term success. Public investment also ensures a platform for meaningful stakeholder engagement, allowing for the incorporation of feedback from regulators, local communities, and other relevant parties. Detailed engineering and cost estimation will provide accurate project cost projections, enabling stakeholders to make informed financial decisions. Additionally, risk assessments will identify potential challenges and uncertainties, allowing for proactive risk mitigation strategies to be implemented.

REFERENCES

Alaska Bureau Land Management, 2022, *Spatial data management system*: https://sdms.ak.blm.gov/sdms/ (accessed October 2022).

Alaska Department of Commerce, Community, and Economic Development, 2023, *Alaska Food Security & Independence Task Force*: www.commerce.alaska.gov/web/FoodSecurityTaskForce.aspx (accessed January 2023).

Alaska Department of Natural Resources, 2022b, *Hilcorp plan of lease operations, Beluga River K pad expansion application*: https://aws.state.ak.us/OnlinePublicNotices/Notices/View.aspx?id=207439.

Alaska Department of Natural Resources, AKDNR 2023, *2022 Cook Inlet Gas Forecast, July 2023 AESTF Presentation to the Alaska Energy Authority*, https://www.akenergyauthority.org/Portals/0/Alaska%20Energy%20Security%20Task%20Force/Symposiums/2023.07.13%20Energy%20Symposium/2023.07.13.01%20Cook%20Inlet%20Gas%20Forecast%20Presentation.pdf.

Alaska Energy Transparency Project, AETP, *Railbelt Cooperatives Facing Critical Decisions On Natural Gas Supplies and Renewable Power*, https://www.akenergytransparency.org/news/railbelt-cooperatives-facing-critical-decisions-about-future-power-generation, accessed February 2024.

Alaska Gasline Development Corporation, 2022, *Alaska LNG project update Oct. 27, 2022*: https://alaska-lng.com/wp-content/uploads/2022/10/Healy-Alaska-LNG-Project-Update-10_24_2022_Final.pdf (accessed 2022).

Alaska Industrial Development and Export Authority, 2022, *West Susitna access, September*: www.aidea.org/Programs/Project-Development/West-Susitna-Access (accessed November 2022).

Alaska Journal of Commerce, 2022, *Golden Valley Electric Association moves to shutter troubled coal plant*: www.alaskajournal.com/2022-07-01/golden-valley-electric-association-moves-shutter-troubled-coal-plant (accessed October 2022).

Alaska Office of Governor, *Governor Dunleavy Legislation to Increase Competition and Reduce Energy Costs for Ratepayers*: Feb. 2, 2024, https://gov.alaska.gov/governor-dunleavy-legislation-to-increase-competition-and-reduce-energy-costs-for-ratepayers/

American University D.C., *What is BECCS? Fact Sheet, June 24, 2020*, https://www.american.edu/sis/centers/carbon-removal/fact-sheet-bioenergy-with-carbon-capture-and-storage-beccs.cfm

Anchorage Daily News, 2022, *Donlin Gold starts biggest drilling program in a decade*: www.adn.com/business-economy/2022/02/02/donlin-gold-starts-biggest-drilling-program-in-a-decade/ (accessed October 2022).

Anchorage Daily News, 2011, *How does a natural gas 'bullet line' fit into Alaska's overall energy picture?*: www.adn.com/energy/article/how-does-natural-gas-bullet-line-fit-alaskas-overall-energy-picture/2011/07/06/ (accessed 2022).

Association for the Advancement of Cost Engineering International, *AACE Recommended Practice No. 87R-14*, https://web.aacei.org/docs/default-source/toc/toc_18r-97.pdf (accessed August 2023).

Babcock & Wilcox, 2020, *University of Alaska Fairbanks combined heat and power plant*: www.babcock.com/home/about/resources/success-stories/university-of-alaska-fairbanks-combined-heat-and-power-plant (accessed November 2022).

Berkeley Research Group, BRG 2023, *Alaska Utilities Working Group Phase 1 Assessment: Cook Inlet Gas Supply Project*, https://www.enstarnaturalgas.com/wp-content/uploads/2023/06/CIGSP-Phase-I-Report-BRG-28June2023.pdf (accessed October 2023).

Black & Veatch, BV 2023, *Chugach Gas Supply Option and Market Assessment* prepared for Chugach Electric Association, Inc., June 2023, filed August 11, 2023 with the RCA, https://rca.alaska.gov/RCAWeb/ViewFile.aspx?id=9B8B67A1-D40D-429A-8C18-F88C072070AF (accessed February 2024).

BrownWinick Law, 2022, *45Q Carbon Sequestration Tax Credit: what it is & how to get it*: www.brownwinick.com/insights/45q-carbon-sequestration-tax-credit-what-it-is-how-to-get-it (accessed December 2022).

Buthman, D., 2017, *Iniskin Peninsula conventional and unconventional exploration targets, Jurassic Tuxedni Group, Lower Cook Inlet onshore, Alaska*: AAPG Pacific Section Annual Meeting, Innovating the Future: Discovery to Recovery. Anchorage, Alaska, May 21–24, 2017. www.searchanddiscovery.com/pdfz/documents/2018/51470buthman/ndx_buthman.pdf.html (accessed November 2022).

Center for Climate and Energy Solutions, C2ES, *Policy Hub US Federal Regulating Power Sector Carbon Emissions*, https://www.c2es.org/content/regulating-power-sector-carbon-emissions/, (accessed February 2024).

Chugach Electric Association, August 11, 2023, *Informational Filing [to RCA] - Chugach Electric Association, Inc. Future Natural Gas Supply*: https://www.documentcloud.org/documents/23917765-chugach-electric-inc-future-natural-gas-supply_-final, (accessed February 2024).

Chugach Electric Association, 2020, *Electric utility tariff*: www.chugachelectric.com/system/files/regulatory_affairs/North_District_Operating_Tariff_-_Electric.pdf (accessed January 2023).

Cicilio, P. et al., *Alaska's Railbelt Electric System: Decarbonization Scenarios for 2050*, Alaska Center for Energy and Power, University of Alaska Fairbanks, January 2024, UAF/ACEP/TP-01-0003, DOI:10.5281/zenodo.10520544.

Dallegge, T.R., 2003, *2001 guide to the petroleum, geology, and shallow gas potential of the Kenai Peninsula, Alaska—a field trip guidebook*: Fairbanks, Alaska: State of Alaska, Department of Natural Resources, Division of Geological & Geophysical Surveys. www.arlis.org/docs/vol1/B/54395715.pdf (accessed 2022).

DeMarban, A., 2022, *Hilcorp warns Alaska utilities about uncertain Cook Inlet natural gas supplies*: Anchorage Daily News, May 17, 2022.

Denholm, P., Schwarz, M., DeGeorge, E., Stout, S., and Wiltse, N., 2022, *Renewable Portfolio standard assessment for Alaska's Railbelt*: Golden, CO: National Renewable Energy Laboratory, NREL/TP-5700-81698. https://www.nrel.gov/docs/fy22osti/81698.pdf (accessed January 2023).

Ellett, K., Wang, J., Christie, M., Pamidighantam, S., Abeysinghe, E., Kammer, R., Middleton, R., Hoover, B., Yaw, S., Wei, N., and Li, X., 2021, *Development of a science gateway software platform for CCS decision support and stakeholder engagement*: Proceedings of the 15th Greenhouse Gas Control Technologies Conference, March 15–18, 2021: SSRN. doi.org/10.2139/ssrn.3821941, SimCCS.org.

Energy & Environmental Science Journal, EESJ 2017, Feb. 17, 2017, *Can BECCS deliver sustainable and resource efficient negative emissions?*: https://doi.org/10.1039/C7EE00465F, https://pubs.rsc.org/en/content/articlelanding/2017/EE/C7EE00465F.

Energy Information Agency, 2022, *Alaska price of natural gas delivered to residential consumers, at 1000 Btu/cf*: https://www.eia.gov/dnav/ng/hist/n3010ak3m.htm (accessed 2022).

Energy.gov, 2022, *FAST-41*: www.energy.gov/oe/mission/transmission-permitting-and-technical-assistance-division/fast-41 (accessed November 2022).

Enstar Natural Gas Co. CEO, John Sims, Testimony February 7, 2024 to Alaska Joint House and Senate Resources Committees.

EPA Class VI Permit Tracker, https://www.epa.gov/uic/current-class-vi-projects-under-review-epa (accessed January 2024).

Estimationqs.com, 2022, *Building costs per square foot in the State of Alaska, USA*: https://estimationqs.com/building-costs-per-square-foot-in-the-state-of-alaska-usa/ (accessed November 2022).

Federal Register 2018, *Review of Standards of Performance for Greenhouse Gas Emissions From New, Modified, and Reconstructed Stationary Sources: Electric Utility Generating Units,* https://www.federalregister.gov/documents/2018/12/20/2018-27052/review-of-standards-of-performance-for-greenhouse-gas-emissions-from-new-modified-and-reconstructed (accessed February 2024).

Federal Reserve Bank of St. Louis, 2022, *Global price of LNG, Asia [PNGASJPUSDM]*: https://fred.stlouisfed.org/series/PNGASJPUSDM (accessed October 2022).

Fenghour, A., Wakeham, W., and Vesovic, V., 1998, *The viscosity of carbon dioxide*: Journal of Physical and Chemical Reference Data, v. 27, no. 1, p. 44. doi: 10.1063/1.556013.

GE Vernova, *Combined Cycle Power Plant: How it Works*: https://www.gevernova.com/gas-power/resources/education/combined-cycle-power-plants (accessed February 2024).

Gillis, R., 2022, *Energy resources – Cook Inlet,* State of Alaska Department of Natural Resources Division of Geological and Geophysical Surveys: https://dggs.alaska.gov/energy/cook-inlet.html (accessed November 2022).

Global CCS Institute, *CO_2RE Facilities Public Database*, https://co2re.co/FacilityData (accessed February 2024).

Institute for Energy Research, 2019, *Wind and Solar Tax Credits*: www.instituteforenergyresearch.org/renewable/wind-and-solar-tax-credits/#:~:text=Wind%20and%20Solar%20Federal%20Tax%20Credits&text=In%201992%2C%20Congress%20passed%20The,years%20of%20the%20facility's%20operation. (accessed December 2022).

International CCS Knowledge Centre, 2018, *Shand CCS feasibility study public report,* November: https://ccsknowledge.com/pub/Publications/Shand_CCS_Feasibility_Study_Public_Report_Nov2018_(2021-05-12).pdf (accessed November 2022).

International Energy Agency, 2022a, *Global methane tracker 2022*: www.iea.org/reports/global-methane-tracker-2022 (accessed November 2022).

International Energy Agency, 2022b, *Section 45Q Credit for carbon oxide sequestration*: www.iea.org/policies/4986-section-45q-credit-for-carbon-oxide-sequestration (accessed December 2022).

International Energy Agency, 2023, *World Energy Outlook 2021*, https://iea.blob.core.windows.net/assets/ed3b983c-e2c9-401c-8633-749c3fefb375/WorldEnergyOutlook2021.pdf (accessed February 2024).

Kneifel, J.D., and Lavappa, P.D., 2022, *NISTIR 85-3273-37 Update 1, energy price indices and discount factors for life-cycle cost analysis – 2022 annual supplement to NIST handbook 135*: https://doi.org/10.6028/NIST.IR.85-3273-37-upd1.

KTOO, 2021, *State allows Donlin Gold to lease land for 315-mile pipeline*, August 3, 2021: www.ktoo.org/2021/08/03/state-allows-donlin-gold-to-lease-land-for-315-mile-pipeline (accessed January 2023).

KTVF, *GVEA signs agreement to purchase surplus power from University of Alaska Fairbanks*, https://www.webcenterfairbanks.com/2021/06/10/gvea-signs-agreement-purchase-surplus-power-university-alaska-fairbanks/, accessed November 2023.

Levinson, R.A., 2013, *Beluga River gas field, Cook Inlet, Alaska, in* Stone, D.M., and Hite, D.M., ed., Oil and gas fields of the Cook Inlet Basin, Alaska: AAPG Memoir 104, p. 245–261.

MegaWatSoft Inc., 2022, September 26. *CO_2 tables calculator*: Retrieved from www.carbon-dioxide-properties.com/co2tablesweb.aspx (accessed January 2023).

Mining News North, 2023, *Critical minerals potential map*: https://www.miningnewsnorth.com/home/customer_files/images/alaska_ree_potential_map_-_usgs.jpg (accessed January 2023).

Minnkota Power Cooperative, 2021, *North Dakota Department of Mineral Resources*: Retrieved from C29029.pdf, https://www.dmr.nd.gov/oilgas/C29029.pdf (accessed November 2022).

National Academies of Sciences, Engineering, and Medicine. 2019. *Negative Emissions Technologies and Reliable Sequestration: A Research Agenda*. Washington, DC: The National Academies Press. https://doi.org/10.17226/25259

National Petroleum Council, 2019, *Meeting the dual challenge, a roadmap to at-scale deployment of carbon capture, use, and storage*: v. III, chap. 6, CO_2 transport: https://dualchallenge.npc.org/downloads.php (accessed November 2022).

National Renewable Energy Lab, Denholm, Paul, Marty Schwarz, Elise DeGeorge, Sherry Stout, and Nathan Wiltse. 2022. *Renewable Portfolio Standard Assessment for Alaska's Railbelt*. Golden, CO: National Renewable Energy Laboratory. NREL/TP-5700-81698. https://www.nrel.gov/docs/fy22osti/81698.pdf.

Northern Journal, Dec 2023, Could a new Alaska coal power plant be climate friendly? An $11 million study aims to find out: https://www.northernjournal.com/p/could-a-new-alaska-coal-power-plant (accessed February 2024).

Pantaleone, S., and Bhattacharya, S., 2021, *Hydrologic and geomechanical characterization of deep sedimentary rocks and basement for safe carbon sequestration in the Cook Inlet Basin,*

Alaska: International Journal of Greenhouse Gas Control, v. 106, p. 103243, https://doi.org/10.1016/j.ijggc.2020.103243.

Pantaleone, S., and Bhattacharya, S., 2020, *Potential for carbon sequestration in the Hemlock Formation of the Cook Inlet Basin, Alaska*: Environmental Geosciences, v. 27, no. 3, p. 143–164, https://doi.org/10.1306/eg.10221919011.

PCOR Partnership Atlas, 6th Edition, 2021, *Anthropogenic CO_2, 2018 global greenhouse gas emissions*: https://pcor.undeerc.org/assets/PDFs/PCOR%20ATLAS%202021.pdf, p. 7.

Peck, W.D., Azzolina, N.A., Nakles, D.V., Glazewski, K.A., Klapperich, R.J., Crocker, C.R., Oster, B.S., Daly, D.J., Livers-Douglas, A.J., Butler, S.K., Smith, S.A., Botnen, B.W., Feole, I.K., He, J., Dotzenrod, N., Salazar, A.Y., Patil, S.B., Crossland, J.L., and Hanson, S., 2020, *North Dakota integrated carbon storage complex feasibility study*: Final report for U.S. Department of Energy National Energy Technology Laboratory Cooperative Agreement No. DE-FE0029488, EERC Publication 2020-EERC-03-19, Grand Forks, North Dakota, Energy & Environmental Research Center, March.

Peck, W.D., Regorrah, J.G., Doll, T.E., Nakles, D.V., Pekot, L.J., and Connors, K.C., 2022, *Pore space—technical and legal considerations for CO_2 storage in North Dakota*: Plains CO_2 Reduction (PCOR) Partnership Initiative White Paper for U.S. Department of Energy National Energy Technology Laboratory and North Dakota Industrial Commission [in preparation].

Petrowiki, 2022, *Natural gas properties*, September 26: https://petrowiki.spe.org/Natural_gas_properties (accessed November 2022).

Reuters, August 24, 2023, *World must stop new unabated coal-fired power - U.S. climate envoy Kerry*, https://www.reuters.com/sustainability/climate-energy/world-must-stop-new-unabated-coal-fired-power-us-climate-envoy-kerry-2023-08-24/

Railbelt Reliability Council, 2022, *A new path for managing Alaska's largest electrical grid*: https://alaskapower.org/rrc/ (accessed November 2022).

Rosselot, K., Allen, D., and Ku, A., 2021, *Comparing greenhouse gas impacts from domestic coal and imported natural gas electricity generation in China*: ACS Sustainable Chemistry & Engineering, v. 9, p. 8759–8769, https://pubs.acs.org/doi/10.1021/acssuschemeng.1c01517.

Shellenbaum, D.P., and Clough, J.G., 2010, *Alaska geologic carbon sequestration potential estimate: Screening saline basins and refining coal estimates*: California Energy Commission, https://dog.dnr.alaska.gov/Documents/ResourceEvaluation/Alaska_Geologic_Carbon_Sequestration_Potential_Estimate.pdf (accessed November 2022).

Stokes, P., 2017, Cook Inlet gas study – 2017 update: *Petrotechnical Resources of Alaska report for Enstar Natural Gas Company filed with the Regulatory Commission of Alaska on June 4*, 2018, Tracking No. TR1802915, on behalf of ENSTAR Natural Gas Company, http://rca.alaska.gov/RCAWeb/Filings/FilingDetails.aspx?id=a9ef7f4c-df09-4b18-a342-cea719c67877 (accessed 2022).

Thomas, C., Doughty, T., Faulder, D., and Hite, D., 2004, *South-central Alaska natural gas study*, National Energy Technology Lab, Arctic energy office report. Contract DE-AM26-99FT40575: www.commerce.alaska.gov/web/Portals/18/Pub/South-Central%20Alaska%20Natural%20Gas%20Study%20Jun%202004.pdf (accessed November 2022).

Unitrove, 2022, *Natural gas density calculator*: www.unitrove.com/engineering/tools/gas/natural-gas-density (accessed September 2022).

U.S. Department of Agriculture, USDA Forest Service, 2005, *The Fate of Dead Spruce on the Kenai Peninsula A Preliminary Report*, https://www.fs.usda.gov/Internet/FSE_DOCUMENTS/stelprdb5252267.pdf

U.S. Department of Energy National Energy Technology Laboratory, 2015, *Cost and performance baseline for fossil energy plants*: Volume 1a: Bituminous coal (PC) and natural gas to electricity Revision 3. July 6, 2015, DOE/NETL-2015/1723, Table ES-4.

U.S. Department of Energy Fossil Energy and Carbon Management, 2023, *Biden-Harris Administration Invests $444 Million to Strengthen America's Infrastructure for Permanent Safe Storage of Carbon Dioxide Pollution* (press release dated November 14, 2023).

U.S. Energy Information Administration, 2022, *How much carbon dioxide is produced per kilowatt-hour of U.S. electricity generation?*: www.eia.gov/tools/faqs/faq.php?id=74&t=11 (accessed January 5, 2023).

U.S. Geological Survey, 2015, *SN-W-MO potential in Alaska*: https://www.usgs.gov/media/images/sn-w-mo-potential-alaska (accessed January 2023).

Zhai, H., Rubin, E., and Versteeg, P., 2011, *Water use at pulverized coal power plants with post combustion carbon capture and storage*: Environmental Science & Technology, v. 45, p. 2479–2485. dx.doi.org/10.1021/es1034443.

EERC

UAF Institute of Northern Engineering
University of Alaska Fairbanks

APPENDIX A

GOVERNMENT FUNDING OPPORTUNITIES AS OF OCTOBER 1, 2022

RS 24-031
IM 24-061

Reference No.	Description	Due Date	Notes
E-FOA-0002804 Released 9/8/2022) ERE Advanced lanufacturing ffice IL OI 2803 ssued 6/29/2022)	**Industrial Efficiency and Decarbonization FOA** Awards will be made at one of two funding levels with max award amount by tier and topic: 1 - Decarbonizing Chemicals 2 - Decarbonizing Iron and Steel 3 - Decarbonizing Food and Beverage Products 4 - Decarbonizing Cement and Concrete 5 - Decarbonizing Paper and Forest Products 6 - Cross-sector Decarbonization Technologies	10/12/2022 Concept paper 12/20/2022 Full application	Up to $104M total Tier 1 up to $3M-$4M per award; 20% cost share Tier 2 up to $5M-$10M per award; Phase 1 or 2 20% cost share, Phase 3 50% cost share 20-36 awards anticipated 1 entity concept paper & application per topic area https://eere-exchange.energy.gov/Default.aspx#Foald9809abda-a152-49e7-8ca3-4cc34d57ea18
E-FOA-0002738 Released 9/2/2022) OE OCED IL rom NOI - 2806 ssued 7/13/2022) OA was nticipated ug/Sept 2022	**BIL: Carbon Capture Demonstration Projects Program** The goal of the BIL Carbon Capture Demonstration Projects Program is to de-risk integrated CCS demonstrations and catalyze significant follow-on investments from the private sector for commercial-scale, integrated CCS demonstrations on carbon emissions sources across industries in the U.S. DOE intends to issue two FOAs to fulfill the requirements of the Program. This first FOA (DE-FOA-0002738) will provide funding for up to 20 FEED studies for integrated CCS, submission of permit applications (i.e., Underground Injection Control (UIC) Class VI permit to construct, if necessary), preparation of an Environmental Information Volume (EIV), and the initial CBP work and analysis, which will address the first Phase of an integrated CCS demonstration project. FOA 2 is expected to be initially released in late 2022. TA-1.1 FEEDs for Integrated CCS Systems at Coal Electric Generation-Only Facilities TA-1.2 FEEDs for Integrated CCS Systems at Coal CHP Facilities TA-2.1 FEEDs for Integrated CCS Systems at NGCC Electric Generation Facilities or NG SMR Facilities Producing H2 for Electricity Generation TA-2.2 FEEDs for Integrated CCS Systems at NG Simple Cycle Electricity Generation Facilities or NG CHP Facilities TA-3.1 FEEDs for Integrated CCS Systems at Ammonia Facilities Not Purposed for Electric Generation TA-3.2 FEEDs for Integrated CCS Systems at Industrial Facilities Not Purposed for Electric Generation	10/21/2022 Mandatory LOI 12/5/2022 Full application Anticipated selection date ~3/31/2023	~$189M total available $5.5M–12.5M per award up to 20 awards 50% cost share required up to 24 months period of performance https://oced-exchange.energy.gov/Default.aspx#Foald82c73432-65b4-4d82-b03c-d61a6fcfe2a0
E-FOA-0002400 mendment 8 Released '26/2022) OE FECM OI - 2822	**Clean Hydrogen Production, Storage, Transport and Utilization to Enable a Net-Zero Carbon Economy** Amendment to previously released FOA 2400. Advances in hydrogen technologies capable of improving performance, reliability, and flexibility of existing and novel methods to produce, transport, store, and/or use hydrogen will enable the United States to greatly reduce its carbon footprint associated with energy use. The amended FOA is make funding available for these areas of interest: AOI-4: Advanced Air Separation for Low-Cost H2 Production via Modular Gasification AOI-14: Clean Hydrogen Production and Infrastructure for Natural Gas Decarbonization 14a: Methane pyrolysis/decomposition, in situ conversion, or cyclical chemical looping reforming 14b: Hydrogen Production from Produced Water AOI-15: Technologies for Enabling the Safe and Efficient Transportation of Hydrogen Within the U.S. Natural Gas Pipeline System AOI-16: Fundamental Research to Enable High Volume, Long-term Subsurface Hydrogen Storage	10/25/2022	Up to $32M available $1.25-$5M per award 20% or 50% cost share required https://www.grants.gov/web/grants/view-opportunity.html?oppId=330950

DE-FOA-0002779 Released 9/22/2022) DOE OCED BIL From NOI - 2768 Issued 6/6/2022) FOA was anticipated Sept/Oct 2022	**Bipartisan Infrastructure Law: Additional Clean Hydrogen Programs (Section 40314): Regional Clean Hydrogen Hubs** This $8 billion effort will catalyze investment in the development of H2Hubs that demonstrate the production, processing, delivery, storage, and end-use of clean hydrogen. Each H2Hub will include multiple partners that will bring together diverse hydrogen technologies to produce and utilize large amounts of hydrogen in different ways. These clean hydrogen demonstrations will balance hydrogen supply and demand, connective infrastructure, and a plan for long-term financial viability. The H2Hubs will also include substantial engagement of local and regional stakeholders, as well as Tribes, to ensure that they generate local, regional, and national benefits. DOE has defined a four-phase structure for the H2Hubs. Phase 1 will encompass initial planning and analysis activities to ensure that the overall H2Hub concept is technologically and financially viable, with input from relevant local stakeholders. Phase 2 will finalize engineering designs and business development, site access, labor agreements, permitting, offtake agreements, and community engagement activities necessary to begin installation, integration, and construction activities in Phase 3. Phase 4 will ramp-up the H2Hub to full operations including data collection to analyze the H2Hub's operations, performance, and financial viability. This FOA will solicit plans for all four phases of proposed H2Hub activities; however, DOE will only initially authorize funding for Phase 1.	11/7/2022 Concept paper 4/7/2023 Full application	$8.0B available over 5 years ($6–$7B in first FOA launch for 6–10 H2Hubs) $400M–$1.25B per award 8–12 year period of performance 50% cost share https://oced-exchange.energy.gov/Default.aspx#Foald4dbbd966-7524-4830-b883-450933661811
DE-FOA-0002711 Released 9/21/2022) DOE FECM BIL From NOI - 2729 (Issued 4/29/2022) FOA was anticipated FY22 Q3 (Apr–Jun)	**Carbon Storage Assurance Facility Enterprise (CarbonSAFE) Initiative: Phases III, III.5, and IV** The overall objective of this FOA is to accelerate the development of new or expanded commercial-scale geologic carbon storage projects and associated carbon dioxide transport infrastructure, through a focus on detailed site characterization, permitting, and construction stages of project development. This FOA is expected to remain open for five years to facilitate expeditious development of secure geologic carbon storage facilities. As required by the BIL, the selection process will give priority to projects with substantial carbon dioxide storage capacity and projects that will store carbon dioxide from multiple carbon capture facilities. It is anticipated that multiple closings will follow through quarter 4 of fiscal year 2026 with the frequency based upon the number of applications received and the availability of funding. This FOA will be amended a minimum of 4 weeks in advance of subsequent closings to provide applicants notice of the next closing date. Phase III – Site Characterization and Permitting (15–40 awards) ($15M–$110.5M/award) (no more than 36 months) Phase III.5 – NEPA, FEED Studies, and Field Development Plan Only (0–10 awards) ($100k–$4.55M/award) (no more than 24 months) Phase IV – Construction (5–20 awards) ($30M–$195M/award) (no more than 30 months)	11/28/2022 Selection notifications ~3/13/2023	$2.25 billion available across all closings through FY26 Q4 20% cost share for Phases III and III.5. 50% cost share for Phase IV.
DE-FOA-0002730 (Released 9/22/2022) DOE FECM BIL From NOI - 2780 (Issued 7/13/2022) FOA was anticipated FY23 Q1 (Oct–Dec)	**BIL: Carbon Capture Technology Program, Front-End Engineering Design for Carbon Dioxide (CO_2) Transport** This FOA is focused on FEED studies of commercial-scale CO_2 pipeline projects that transport CO_2 from anthropogenic sources to CO_2 conversion plants and/or to secure geologic storage facilities, with an emphasis on FEED studies in different geographic regions that will provide DOE with increased understanding of CO_2 transport costs; transport network configurations; and technical, regulatory, and commercial considerations to inform DOE's research, development, and demonstration (RD&D) strategy and to encourage fully commercial-scale deployment of CCUS and CDR. The intent of this FOA is to award projects with consideration for the creation and integration of a hub and cluster configuration, rather than a standalone CCUS/CDR pipeline(s). Applicants are also encouraged to propose projects that will repurpose existing pipeline(s) into CO_2 service. Area of Interest: Front-End Engineering and Design Studies for CO_2 Pipeline Infrastructure (Onshore and Offshore)	11/28/2022 Selection notifications March 2023	$92M to be available for a 5-yr period with 6 or more awards per year $750k–$3M per award 20% cost share required 1–2 year period of performance https://www.grants.gov/web/grants/view-opportunity.html?oppId=342284

NOI - 2746 for DE-FOA-0002735 Issued 5/13/2022) DOE FECM NETL BIL	**Bipartisan Infrastructure Law (BIL): Regional Direct Air Capture (DAC) Hubs** Section 40308 of the BIL requires DOE to provide funding for eligible projects that contribute to the development of four (4) regional DAC Hubs. Each of the DAC Hubs: (i) facilitates the deployment of direct air capture projects; (ii) has the capacity to capture and sequester, utilize, or sequester and utilize at least 1,000,000 metric tons of carbon dioxide from the atmosphere annually from a single unit or multiple interconnected units; (iii) demonstrates the capture, processing, delivery, and sequestration or end use of captured carbon; and (iv) could be developed into a regional or interregional carbon network to facilitate sequestration or carbon utilization. 2 project timelines: AOI-1: Standard timeline - Phase 1 funding with this FOA. AOI-2: Accelerated timeline - Phase 1 (equal to AOI-1 Phase 1) funding with this FOA.		FOA anticipated FY22 Q4 (July–Sep) $3.5B available Likely 20% cost share for AOI-1 Phase 1. Likely 50% cost share for AOI-2 Phase 2. All subsequent phases 50%. https://www.grants.gov/web/grants/view-opportunity.html?oppId=340319
NOI - 2798 for DE-FOA-0002799 Issued 7/21/2022) DOE FECM	**Regional Initiative to Accelerate Carbon Management Deployment: Technical Assistance for Large Scale Storage Facilities and Regional Carbon Management Hubs** If released, the overall objective of this FOA will be to accelerate the deployment of carbon management by establishing a consistent, effective mechanism for providing technical assistance to develop multiple large scale storage facilities and regional carbon management (CM) hubs that could store hundreds of millions of tons and inject over 5 million metric tons per year. DOE views this FOA as an opportunity to (a) expand, refine, and enhance the 'technical assistance' aspects of the RI effort to directly support development of large scale storage facilities (5MMT+/year) and regional carbon management hubs; and (b) attract applications from other organizations that may be equally capable of providing the same type of technical assistance to large-scale storage facilities and regional carbon management hubs under development as the existing RI projects. The two intended Areas of Interest in this FOA will result in awards that can work separately or in tandem to provide the desired technical support. • Area of Interest 1 - Technical Assistance for Geologic CO_2 Storage and Transport for Large Scale Storage Facilities and within Prospective Regional CM Hubs • Area of Interest 2 - State Geological Data Gathering and Analysis to Support Large Scale Storage Facilities and Regional CM Hub Development		FOA anticipated FY23 Q1 (Oct–Dec) If released, not <$20M to be available for a 5-yr period 20% cost share required Max 2 years https://www.grants.gov/web/grants/view-opportunity.html?oppId=342628

Reference No.	Description	Due Date	Notes
)E-FOA-0002804 Released 9/8/2022) :ERE Advanced Manufacturing)ffice 3IL)OI 2803 ssued 6/29/2022)	**Industrial Efficiency and Decarbonization FOA** Awards will be made at one of two funding levels with max award amount by tier and topic: 1 - Decarbonizing Chemicals 2 - Decarbonizing Iron and Steel 3 - Decarbonizing Food and Beverage Products 4 - Decarbonizing Cement and Concrete 5 - Decarbonizing Paper and Forest Products 6 - Cross-sector Decarbonization Technologies	10/12/2022 Concept paper 12/20/2022 Full application	Up to $104M total Tier 1 up to $3M-$4M per award; 20% cost share Tier 2 up to $5M-$10M per award; Phase 1 or 2 20% cost share, Phase 3 50% cost share 20-38 awards anticipated 1 entity concept paper & application per topic area https://eere-exchange.energy.gov/Default.aspx#Foald9809abda-a152-49e7-8ca3-4cc34d57ea18
)E-FOA-0002738 Released 9/2/2022))OE OCED 3IL 'rom NOI - 2806 ssued 7/13/2022) 'OA was nticipated ug/Sept 2022	**BIL: Carbon Capture Demonstration Projects Program** The goal of the BIL Carbon Capture Demonstration Projects Program is to de-risk integrated CCS demonstrations and catalyze significant follow-on investments from the private sector for commercial-scale, integrated CCS demonstrations on carbon emissions sources across industries in the U.S. DOE intends to issue two FOAs to fulfill the requirements of the Program. This first FOA (DE-FOA-0002738) will provide funding for up to 20 FEED studies for integrated CCS, submission of permit applications (i.e., Underground Injection Control (UIC) Class VI permit to construct, if necessary), preparation of an Environmental Information Volume (EIV), and the initial CBP work and analysis, which will address the first Phase of an integrated CCS demonstration project. FOA 2 is expected to be initially released in late 2022. TA-1.1 FEEDs for Integrated CCS Systems at Coal Electric Generation-Only Facilities TA-1.2 FEEDs for Integrated CCS Systems at Coal CHP Facilities TA-2.1 FEEDs for Integrated CCS Systems at NGCC Electric Generation Facilities or NG SMR Facilities Producing H2 for Electricity Generation TA-2.2 FEEDs for Integrated CCS Systems at NG Simple Cycle Electricity Generation Facilities or NG CHP Facilities TA-3.1 FEEDs for Integrated CCS Systems at Ammonia Facilities Not Purposed for Electric Generation TA-3.2 FEEDs for Integrated CCS Systems at Industrial Facilities Not Purposed for Electric Generation	10/21/2022 Mandatory LOI 12/5/2022 Full application Anticipated selection date ~3/31/2023	~$189M total available $5.5M–12.5M per award up to 20 awards 50% cost share required up to 24 months period of performance https://oced-exchange.energy.gov/Default.aspx#Foald82c73432-65b4-4d82-b03c-d61a6fcfe2a0
)E-FOA-0002400 Amendment 8 Released 1/26/2022))OE FECM)OI - 2822	**Clean Hydrogen Production, Storage, Transport and Utilization to Enable a Net-Zero Carbon Economy** Amendment to previously released FOA 2400. Advances in hydrogen technologies capable of improving performance, reliability, and flexibility of existing and novel methods to produce, transport, store, and/or use hydrogen will enable the United States to greatly reduce its carbon footprint associated with energy use. The amended FOA is make funding available for these areas of interest: AOI-4: Advanced Air Separation for Low-Cost H2 Production via Modular Gasification AOI-14: Clean Hydrogen Production and Infrastructure for Natural Gas Decarbonization 14a: Methane pyrolysis/decomposition, in situ conversion, or cyclical chemical looping reforming 14b: Hydrogen Production from Produced Water AOI-15: Technologies for Enabling the Safe and Efficient Transportation of Hydrogen Within the U.S. Natural Gas Pipeline System AOI-16: Fundamental Research to Enable High Volume, Long-term Subsurface Hydrogen Storage	10/25/2022	Up to $32M available $1.25-$5M per award 20% or 50% cost share required https://www.grants.gov/web/grants/view-opportunity.html?oppId=330950

IE-FOA-0002779 Released /22/2022))OE OCED ilL rom NOI - 2768 ssued 6/6/2022) OA was nticipated ept/Oct 2022	**Bipartisan Infrastructure Law: Additional Clean Hydrogen Programs (Section 40314): Regional Clean Hydrogen Hubs** This $8 billion effort will catalyze investment in the development of H2Hubs that demonstrate the production, processing, delivery, storage, and end-use of clean hydrogen. Each H2Hub will include multiple partners that will bring together diverse hydrogen technologies to produce and utilize large amounts of hydrogen in different ways. These clean hydrogen demonstrations will balance hydrogen supply and demand, connective infrastructure, and a plan for long-term financial viability. The H2Hubs will also include substantial engagement of local and regional stakeholders, as well as Tribes, to ensure that they generate local, regional, and national benefits. DOE has defined a four-phase structure for the H2Hubs. Phase 1 will encompass initial planning and analysis activities to ensure that the overall H2Hub concept is technologically and financially viable, with input from relevant local stakeholders. Phase 2 will finalize engineering designs and business development, site access, labor agreements, permitting, offtake agreements, and community engagement activities necessary to begin installation, integration, and construction activities in Phase 3. Phase 4 will ramp-up the H2Hub to full operations including data collection to analyze the H2Hub's operations, performance, and financial viability. This FOA will solicit plans for all four phases of proposed H2Hub activities; however, DOE will only initially authorize funding for Phase 1.	11/7/2022 Concept paper 4/7/2023 Full application	$8.0B available over 5 years ($6–$7B in first FOA launch for 6–10 H2Hubs) $400M–$1.25B per award 8–12 year period of performance 50% cost share https://oced-exchange.energy.gov/Default.aspx#FoaId4dbbd966-7524-4830-b883-450933661811
IE-FOA-0002711 Released /21/2022))OE FECM ilL rom NOI - 2729 ssued 4/29/2022) OA was nticipated FY22 Q3 (Apr–Jun)	**Carbon Storage Assurance Facility Enterprise (CarbonSAFE) Initiative: Phases III, III.5, and IV** The overall objective of this FOA is to accelerate the development of new or expanded commercial-scale geologic carbon storage projects and associated carbon dioxide transport infrastructure, through a focus on detailed site characterization, permitting, and construction stages of project development. This FOA is expected to remain open for five years to facilitate expeditious development of secure geologic carbon storage facilities. As required by the BIL, the selection process will give priority to projects with substantial carbon dioxide storage capacity and projects that will store carbon dioxide from multiple carbon capture facilities. It is anticipated that multiple closings will follow through quarter 4 of fiscal year 2026 with the frequency based upon the number of applications received and the availability of funding. This FOA will be amended a minimum of 4 weeks in advance of subsequent closings to provide applicants notice of the next closing date. Phase III – Site Characterization and Permitting (15–40 awards) ($15M–$110.5M/award) (no more than 36 months) Phase III.5 – NEPA, FEED Studies, and Field Development Plan Only (0–10 awards) ($100k–$4.55M/award) (no more than 24 months) Phase IV – Construction (5–20 awards) ($30M–$195M/award) (no more than 30 months)	11/28/2022 Selection notifications ~3/13/2023	$2.25 billion available across all closings through FY26 Q4 20% cost share for Phases III and III.5. 50% cost share for Phase IV.
IE-FOA-0002730 Released /22/2022))OE FECM ilL rom NOI - 2780 ssued 7/13/2022) OA was nticipated FY23 Q1 (Oct–Dec)	**BIL: Carbon Capture Technology Program, Front-End Engineering Design for Carbon Dioxide (CO_2) Transport** This FOA is focused on FEED studies of commercial-scale CO_2 pipeline projects that transport CO_2 from anthropogenic sources to CO_2 conversion plants and/or to secure geologic storage facilities, with an emphasis on FEED studies in different geographic regions that will provide DOE with increased understanding of CO_2 transport costs; transport network configurations; and technical, regulatory, and commercial considerations to inform DOE's research, development, and demonstration (RD&D) strategy and to encourage fully commercial-scale deployment of CCUS and CDR. The intent of this FOA is to award projects with consideration for the creation and integration of a hub and cluster configuration, rather than a standalone CCUS/CDR pipeline(s). Applicants are also encouraged to propose projects that will repurpose existing pipeline(s) into CO_2 service. Area of Interest: Front-End Engineering and Design Studies for CO_2 Pipeline Infrastructure (Onshore and Offshore)	11/28/2022 Selection notifications March 2023	$92M to be available for a 5-yr period with 6 or more awards per year $750k–$3M per award 20% cost share required 1–2 year period of performance https://www.grants.gov/web/grants/view-opportunity.html?oppId=342284

)OI - 2746 for)E-FOA-0002735 Issued 5/13/2022))OE FECM NETL 3IL	**Bipartisan Infrastructure Law (BIL): Regional Direct Air Capture (DAC) Hubs** Section 40308 of the BIL requires DOE to provide funding for eligible projects that contribute to the development of four (4) regional DAC Hubs. Each of the DAC Hubs: (i) facilitates the deployment of direct air capture projects; (ii) has the capacity to capture and sequester, utilize, or sequester and utilize at least 1,000,000 metric tons of carbon dioxide from the atmosphere annually from a single unit or multiple interconnected units; (iii) demonstrates the capture, processing, delivery, and sequestration or end use of captured carbon; and (iv) could be developed into a regional or interregional carbon network to facilitate sequestration or carbon utilization. 2 project timelines: AOI-1: Standard timeline - Phase 1 funding with this FOA. AOI-2. Accelerated timeline - Phase 1 (equal to AOI-1 Phase 1) funding with this FOA.		FOA anticipated FY22 Q4 (July–Sep) $3.5B available Likely 20% cost share for AOI-1 Phase 1. Likely 50% cost share for AOI-2 Phase 2. All subsequent phases 50%. https://www.grants.gov/web/grants/view-opportunity.html?oppId=340319
)OI - 2798 for)E-FOA-0002799 Issued 7/21/2022))OE FECM	**Regional Initiative to Accelerate Carbon Management Deployment: Technical Assistance for Large Scale Storage Facilities and Regional Carbon Management Hubs** If released, the overall objective of this FOA will be to accelerate the deployment of carbon management by establishing a consistent, effective mechanism for providing technical assistance to develop multiple large scale storage facilities and regional carbon management (CM) hubs that could store hundreds of millions of tons and inject over 5 million metric tons per year. DOE views this FOA as an opportunity to (a) expand, refine, and enhance the 'technical assistance' aspects of the RI effort to directly support development of large scale storage facilities (5MMT+/year) and regional carbon management hubs; and (b) attract applications from other organizations that may be equally capable of providing the same type of technical assistance to large-scale storage facilities and regional carbon management hubs under development as the existing RI projects. The two intended Areas of Interest in this FOA will result in awards that can work separately or in tandem to provide the desired technical support. • Area of Interest 1 - Technical Assistance for Geologic CO_2 Storage and Transport for Large Scale Storage Facilities and within Prospective Regional CM Hubs • Area of Interest 2 - State Geological Data Gathering and Analysis to Support Large Scale Storage Facilities and Regional CM Hub Development		FOA anticipated FY23 Q1 (Oct–Dec) If released, not <$20M to be available for a 5-yr period 20% cost share required Max 2 years https://www.grants.gov/web/grants/view-opportunity.html?oppId=342628

EERC

UAF Institute of Northern Engineering
University of Alaska Fairbanks

APPENDIX B

PROJECT PERMITTING MATRICES

RS 24-031
IM 24-061

able B-1. NEPA and Federal Permitting Requirements

	NEPA Document (EA / EIS)	NHPA Sec. 106 Consultation	EFH & ESA Sec. 7 Consultation	CWA 404	RHA 10	RCRA Hazardous Waste Permit	PHMSA Authorization Letter	Title VI Injection Well Permit	BGEPA and MBTA
	USACE-Led	*USACE-Led*	*NMFS / USFWS*	*USACE*	*USACE*	*EPA*	*US DOT PHMSA*	*EPA*	*USFWS*
onstruction Activities									
learing, Grubbing, Grading, and Ground Prep. at Mine Site	X	X		X					X
5MW - 500 MW Power Plant Options	X	X		X		X			X
levated AC overhead transmission line	X	X		X					X
uried CO2 Transport Pipeline	X	X	X	X	X		X		X
ipeline Compressor(s)	X	X		X					X
O2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)	X							X	
perational Activities									
lining of Carbon Ore to Fuel the Power Plant	X	X		X		X			X
5MW - 500 MW Power Plant Options	X	X		X		X			X
levated AC overhead transmission line	X	X		X					X
uried CO2 Transport Pipeline	X	X	X	X	X		X		X
ipeline Compressor(s)	X	X		X					X
O2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)	X							X	

able B-2. State of Alaska Permitting Requirements

	APMA	CWA 401 Cert. & Antideg. Analysis	CWA 402 APDES Const. GP, SPCC, and SWPPP	CWA 402 Non-Contact Cooling Water GP	CWA 402 Domest. WW Trtmt. Plant GP	TWUP	Certificate of Appropriation (Water Right)	Title 16 Fish Habitat Permit	PSD Permit Minor or Major Source	Title V CAA Operating Permit	Area Injection Order	POD	PA	CRMP	RRC Authorization
	ADNR DMLW	*ADEC Water*	*ADEC Water*	*ADEC Water*	*ADEC Water*	*ADNR DMLW*	*ADNR DMLW*	*ADFG Habitat*	*ADEC Air*	*ADEC Air*	*AOGCC*	*ADNR DOG*	*ADNR SHPO*	*ADNR SHPO*	*RRC RCA*
onstruction Activities															
learing, Grubbing, Grading, and Ground Prep. at Mine Site	X	X	X		X	X			X				X	X	
5MW - 500 MW Power Plant Options		X	X		X				X				X	X	
levated AC overhead transmission line		X	X										X	X	X
uried CO2 Transport Pipeline		X	X			X		X					X	X	
ipeline Compressor(s)		X	X						X				X	X	
O2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)									X			X			
perational Activities															
lining of Carbon Ore to Fuel the Power Plant	X	X	X		X	X	X		X	X			X	X	
5MW - 500 MW Power Plant Options		X	X	X	X				X	X					
levated AC overhead transmission line		X	X												X
uried CO2 Transport Pipeline		X	X												
ipeline Compressor(s)		X	X						X	X					
O2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)									X	X	X	X			

Table B-3, Lands, Right of Way, and Pore Space-Leasing Requirements

	State (< 75 mi) *ADNR (DMLW)*	ANC (< 4 mi) *CIRI*	Private (< 0.5 mi) *Chugach Electric*	Federal *EPA*	State *ADNR (DOG)*	ANC *CIRI*
Construction Activities						
Clearing, Grubbing, Grading, and Ground Prep. at Mine Site	X					
25MW - 500 MW Power Plant Options	X					
Elevated AC overhead transmission line	X	X	X			
Buried CO2 Transport Pipeline	X	X	X			
Pipeline Compressor(s)	X					
CO2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)			X			
Operational Activities						
Clearing, Grubbing, Grading, and Ground Prep. at Mine Site	X					
25MW - 500 MW Power Plant Options	X					
Elevated AC overhead transmission line	X	X	X			
Buried CO2 Transport Pipeline	X	X	X			
Pipeline Compressor(s)	X					
CO2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)			X	X	X	X

	State (< 75 mi) *ADNR (DMLW)*	ANC (< 4 mi) *CIRI*	Private (< 0.5 mi) *Chugach Electric*	Federal *EPA*	State *ADNR (DOG)*	ANC *CIRI*
Construction Activities						
Clearing, Grubbing, Grading, and Ground Prep. at Mine Site	X					
25MW - 500 MW Power Plant Options	X					
Elevated AC overhead transmission line	X	X	X			
Buried CO2 Transport Pipeline	X	X	X			
Pipeline Compressor(s)	X					
CO2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)			X			
Operational Activities						
Clearing, Grubbing, Grading, and Ground Prep. at Mine Site	X					
25MW - 500 MW Power Plant Options	X					
Elevated AC overhead transmission line	X	X	X			
Buried CO2 Transport Pipeline	X	X	X			
Pipeline Compressor(s)	X					
CO2 Injection Wells - Onshore at Existing Beluga Power Plant Pad(s)			X	X	X	X